

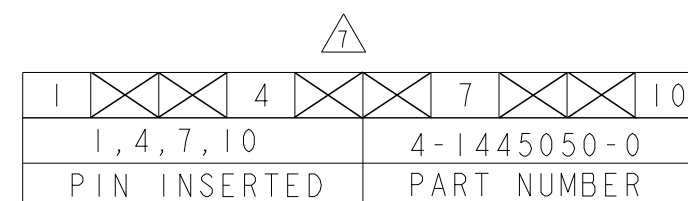



| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | B5  | REVISED PER ECR-16-011494 | 20JUN2017 | NK  | CX   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

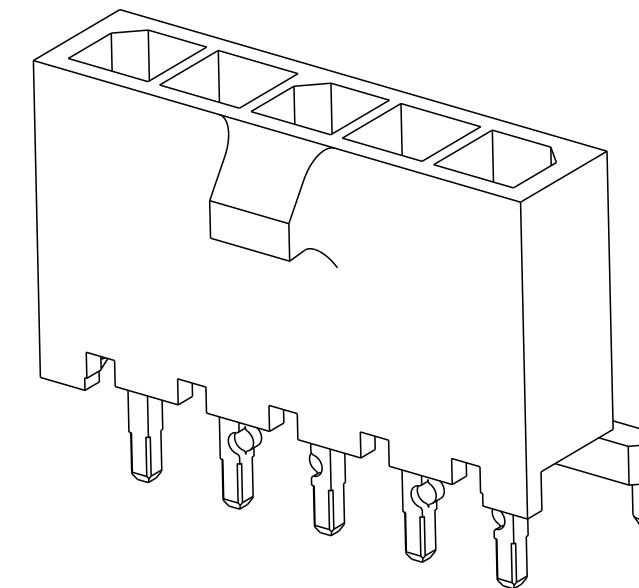

- ① MATERIAL:    CONTACTS - BRASS  
                 HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
- ② PLATING:    CONTACTS - 2.54 $\mu$ m MINIMUM TIN-LEAD OVER 1.27 $\mu$ m MINIMUM NICKEL.
- ④ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- ⑤ RETENTION BUMP FEATURES FACE EACH OTHER, TYPICAL ALL CONFIGURATIONS.
- ⑥ PLATING:    CONTACTS - 2.54 $\mu$ m MINIMUM MATTE TIN OVER 1.27 $\mu$ m MINIMUM NICKEL.
- ⑦ SELECTIVE LOADED CONFIGURATION.

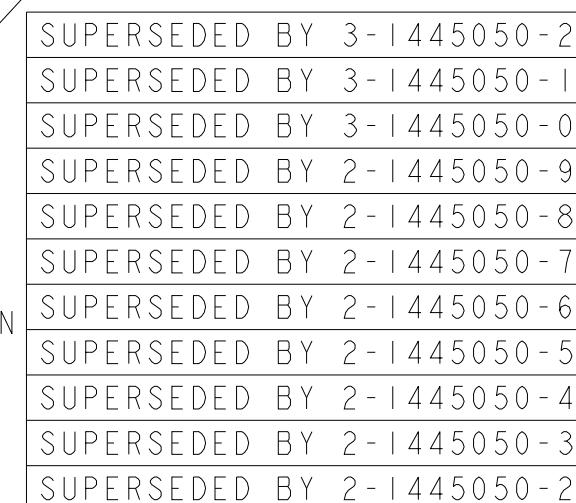

|     |        |                       |       |       |       |                |             |
|-----|--------|-----------------------|-------|-------|-------|----------------|-------------|
| 7   | 6      | 1, 4, 7, 10           | 27.00 | 33.14 | 31.00 | 10             | 4-1445050-0 |
|     | 6      | 1, 2, 11, 12          | 33.00 | 39.14 | 37.00 | 12             | 3-1445050-2 |
|     | 6      | 1, 2, 9, 10           | 30.00 | 36.14 | 34.00 | 11             | 3-1445050-1 |
|     | 6      | 1, 2, 9, 10           | 27.00 | 33.14 | 31.00 | 10             | 3-1445050-0 |
|     | 6      | 1, 2, 7, 8            | 24.00 | 30.14 | 28.00 | 9              | 2-1445050-9 |
|     | 6      | 1, 2, 7, 8            | 21.00 | 27.14 | 25.00 | 8              | 2-1445050-8 |
|     | 6      | 1, 2, 5, 6            | 18.00 | 24.14 | 22.00 | 7              | 2-1445050-7 |
|     | 6      | 1, 2, 5, 6            | 15.00 | 21.14 | 19.00 | 6              | 2-1445050-6 |
|     | 6      | 1, 2, 3, 4            | 12.00 | 18.14 | 16.00 | 5              | 2-1445050-5 |
|     | 6      | 1, 2, 3, 4            | 9.00  | 15.14 | 13.00 | 4              | 2-1445050-4 |
|     | 6      | 1, 2                  | 6.00  | 12.14 | 10.00 | 3              | 2-1445050-3 |
|     | 6      | 1, 2                  | 3.00  | 9.14  | 7.00  | 2              | 2-1445050-2 |
| 0-2 | 2      | 1, 2, 11, 12          | 33.00 | 39.14 | 37.00 | 12             | +1445050-2- |
| 0-1 | 2      | 1, 2, 9, 10           | 30.00 | 36.14 | 34.00 | 11             | +1445050-1- |
| 0-0 | 2      | 1, 2, 9, 10           | 27.00 | 33.14 | 31.00 | 10             | +1445050-0- |
| 0-9 | 2      | 1, 2, 7, 8            | 24.00 | 30.14 | 28.00 | 9              | +1445050-9- |
| 0-8 | 2      | 1, 2, 7, 8            | 21.00 | 27.14 | 25.00 | 8              | +1445050-8- |
| 0-7 | 2      | 1, 2, 5, 6            | 18.00 | 24.14 | 22.00 | 7              | +1445050-7- |
| 0-6 | 2      | 1, 2, 5, 6            | 15.00 | 21.14 | 19.00 | 6              | +1445050-6- |
| 0-5 | 2      | 1, 2, 3, 4            | 12.00 | 18.14 | 16.00 | 5              | +1445050-5- |
| 0-4 | 2      | 1, 2, 3, 4            | 9.00  | 15.14 | 13.00 | 4              | +1445050-4- |
| 0-3 | 2      | 1, 2                  | 6.00  | 12.14 | 10.00 | 3              | +1445050-3- |
| 0-2 | 2      | 1, 2                  | 3.00  | 9.14  | 7.00  | 2              | +1445050-2- |
|     | FINISH | CON POS<br>W/RET BUMP | DIM Z | DIM V | DIM L | NO. OF<br>POSN | PART NUMBER |

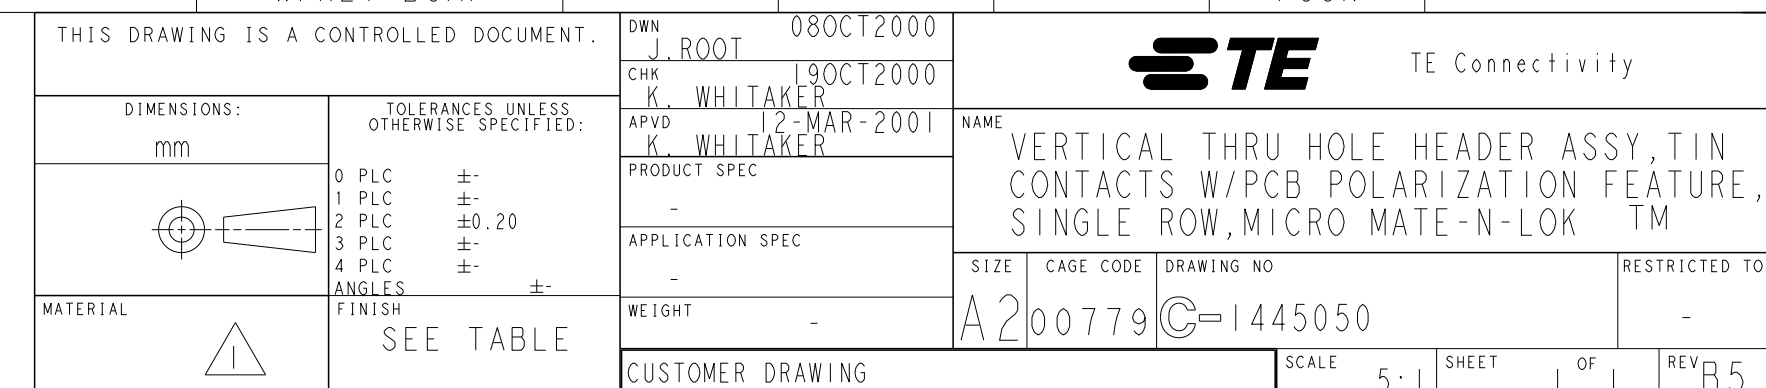

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1445050-0](#)