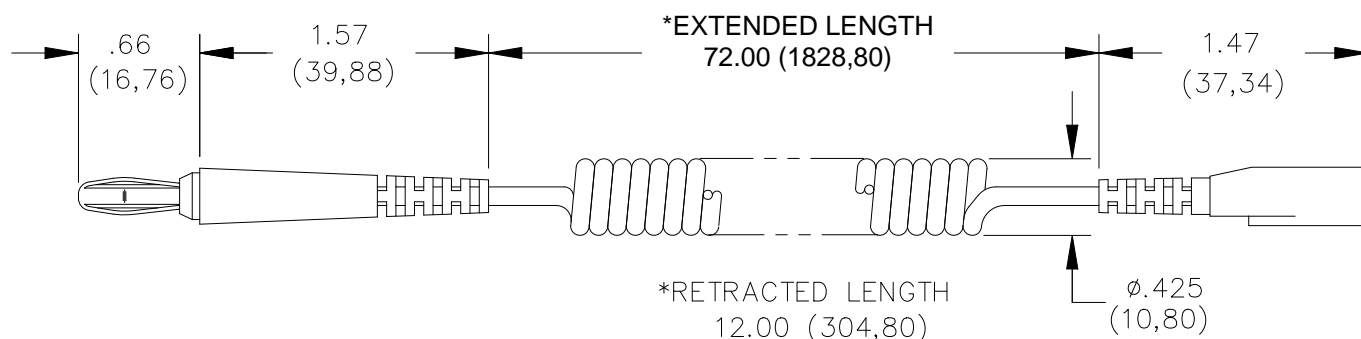


Model 5534
Static Control Ground Cord**Materials**

Connector: 1st End – Standard Banana Plug

Spring: Beryllium Copper Alloy QP2.0

Plug Body: Brass Alloy 87-75% Hard

Finish: Nickel-plated per QQ-N-290, Class 2, 150 microinches

Insulation: PVC, color: black

Coiled Cord – Coiled tinsel cord, 2 bundles, 7 tinsel of bare copper, Polyurethane jacket 2.25mm O.D.

Connector: 2nd End – 3.18 (1/8) Snap Receptacle – Brass

Finish: Nickel-plated

Insulation: PVC, color: black

Molded-In Resistor: 1 megohm \pm 10%, 1/4 Watt, Carbon Film

Ratings

Operating Temperature: +50°C (+122°F) Max

Ordering Information

Model: 5534

Static Control Ground Cord

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = \pm .02" (.51 mm),
.xxx = \pm .005" (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pomona:](#)

[5534](#)