

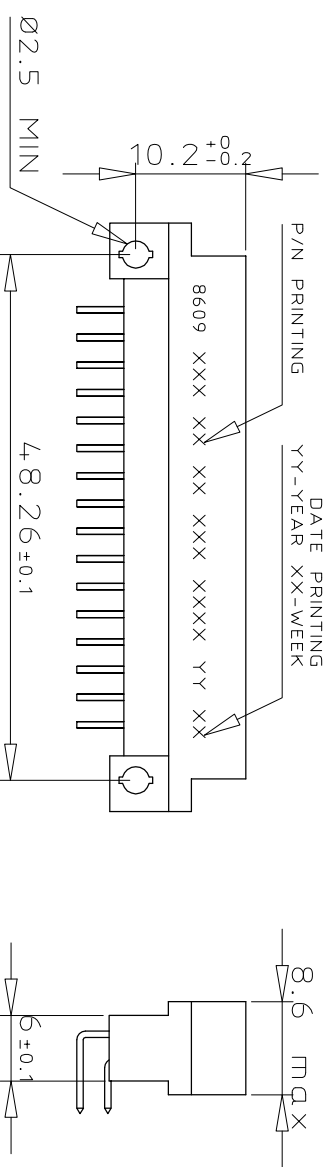



DIMENSIONS

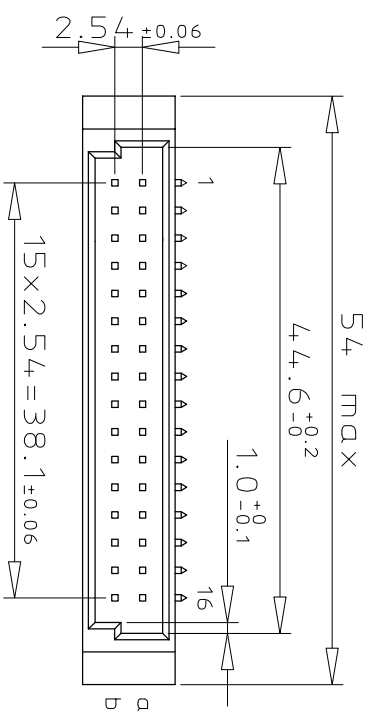

PCB LAYOUT

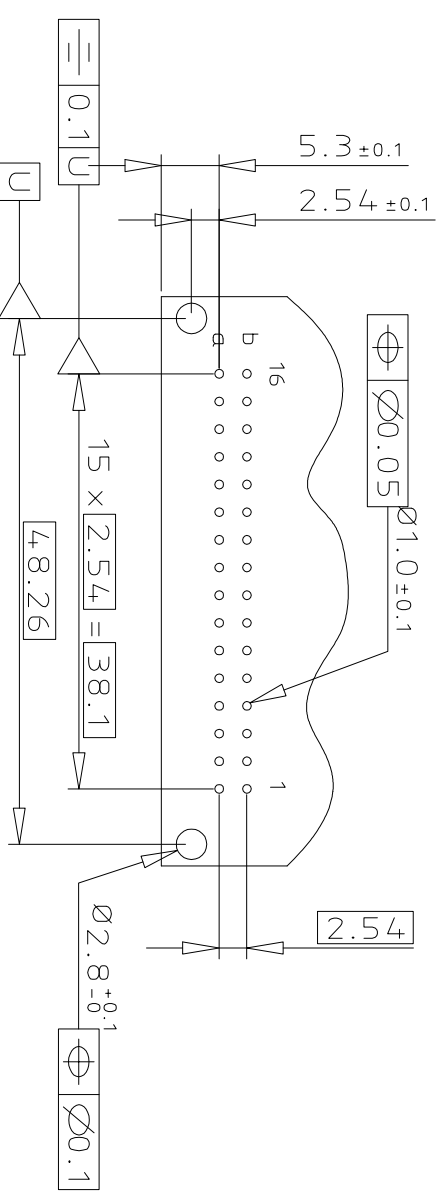

TERMINATION

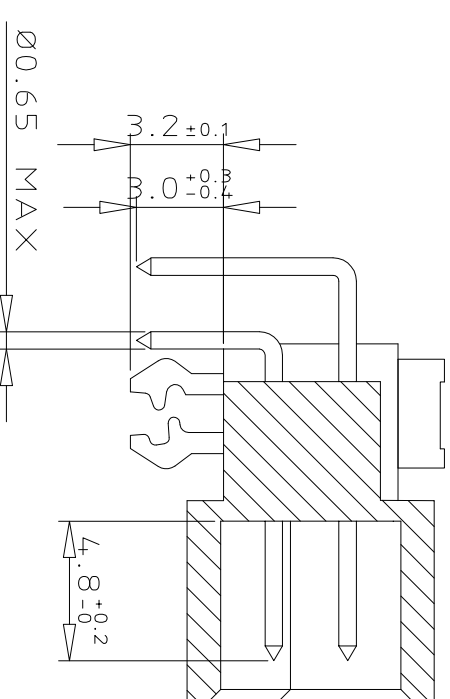

ORDERING INFORMATION

SERIES	8609	2	32	5	3	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS	ROW a	b	-	-	-	-	-	-	-	-
NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS	NO. OF CONTACTS
TYPE OF INSULATOR	2 ROW MALE INSULATOR									
METHOD OF MOUNTING	STANDARD MOUNTING - STYLE B/2									
PERFORMANCE CLASS	DIN 41612 CLASS 3									
LEAD FREE VERSION	ELF									

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302	tolerance	ISO 406 ISO 1101	projection	mm	product family	8609
tr	ecn	no	dr	date	tolerances unless otherwise specified	angles	linear	scale	3:2
A	104-0063	MINI	2004-09-17		0.X	±0.1			
B	105-0089	MINI	2005-05-19		0.XX	±0.1			
C	106-0061	MINI	2006-05-31	0*2*	0.XXX	±0.1			
D	107-0155	KR	2007-11-14	dr	MINI K V	2004-09-17			
E	108-0146	KR	2008-10-21	engr	RAKHEE G	2004-09-17			
		chr			KESAVAN R	2008-10-21			
		pppd			KESAVAN R	2008-10-21			
sheet index	revision	sheet	1						



FCI
DIN STANDARD HEADER
ANGLED SPILL DIN 41612 STYLE B/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86092325313755ELF](#) [86092325313745ELF](#) [86092325313765ELF](#) [86092325313H55ELF](#)