

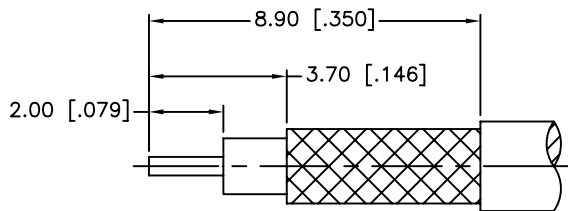
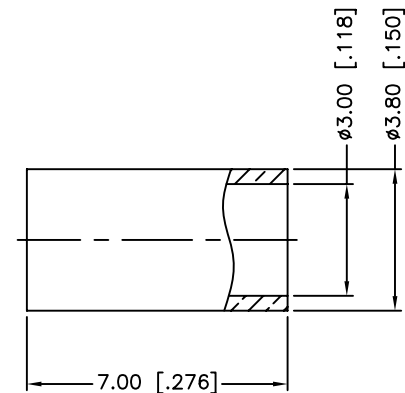


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/13/07	XXXXXX	INITIAL RELEASE
A	03/24/09	XXXXXX	UPDATE BARREL, CONTACT PIN, FERRULE DIMENSIONS
B	08/19/11	2218	UPDATE CONTACT PIN DIMENSION

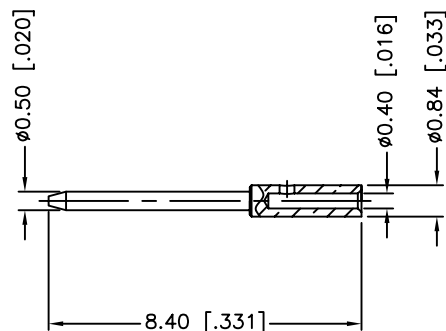

RECOMMENDED
CABLE STRIPPING DIM'S

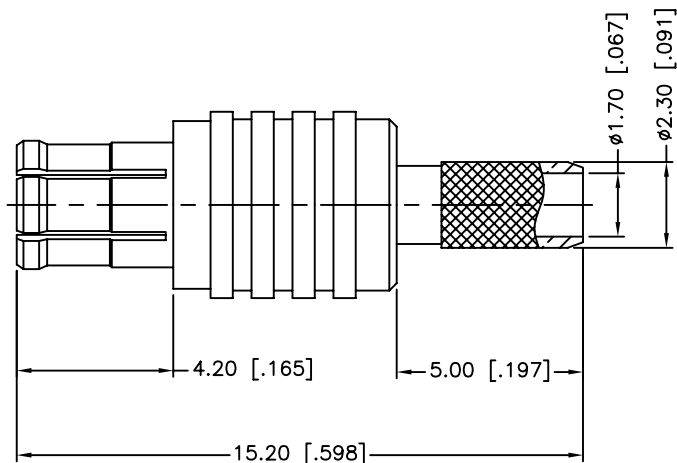

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex			
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	DRAWN S.LI	08/19/11				
						CHECKED		MCX CRIMP PLUG (FOR RG-179A/U, 179B/U, 187A/U)			
						ISSUED					
5	FERRULE	COPPER	NICKEL	1		SHEET 1 OF 1		252101-75			
4	CONTACT PIN	BRASS	GOLD	1							
3	INSULATOR	PTFE	NATURAL	1				252101-75			
2	BODY	BER. COPPER	GOLD	1							
1	HOUSING	BRASS	NICKEL	1				252101-75			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/CONNEX/252101-75.DWG	DWG. NO. 252101-75.DWG	REV. B	SIZE A	SCALE NA	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[252101-75](#)