


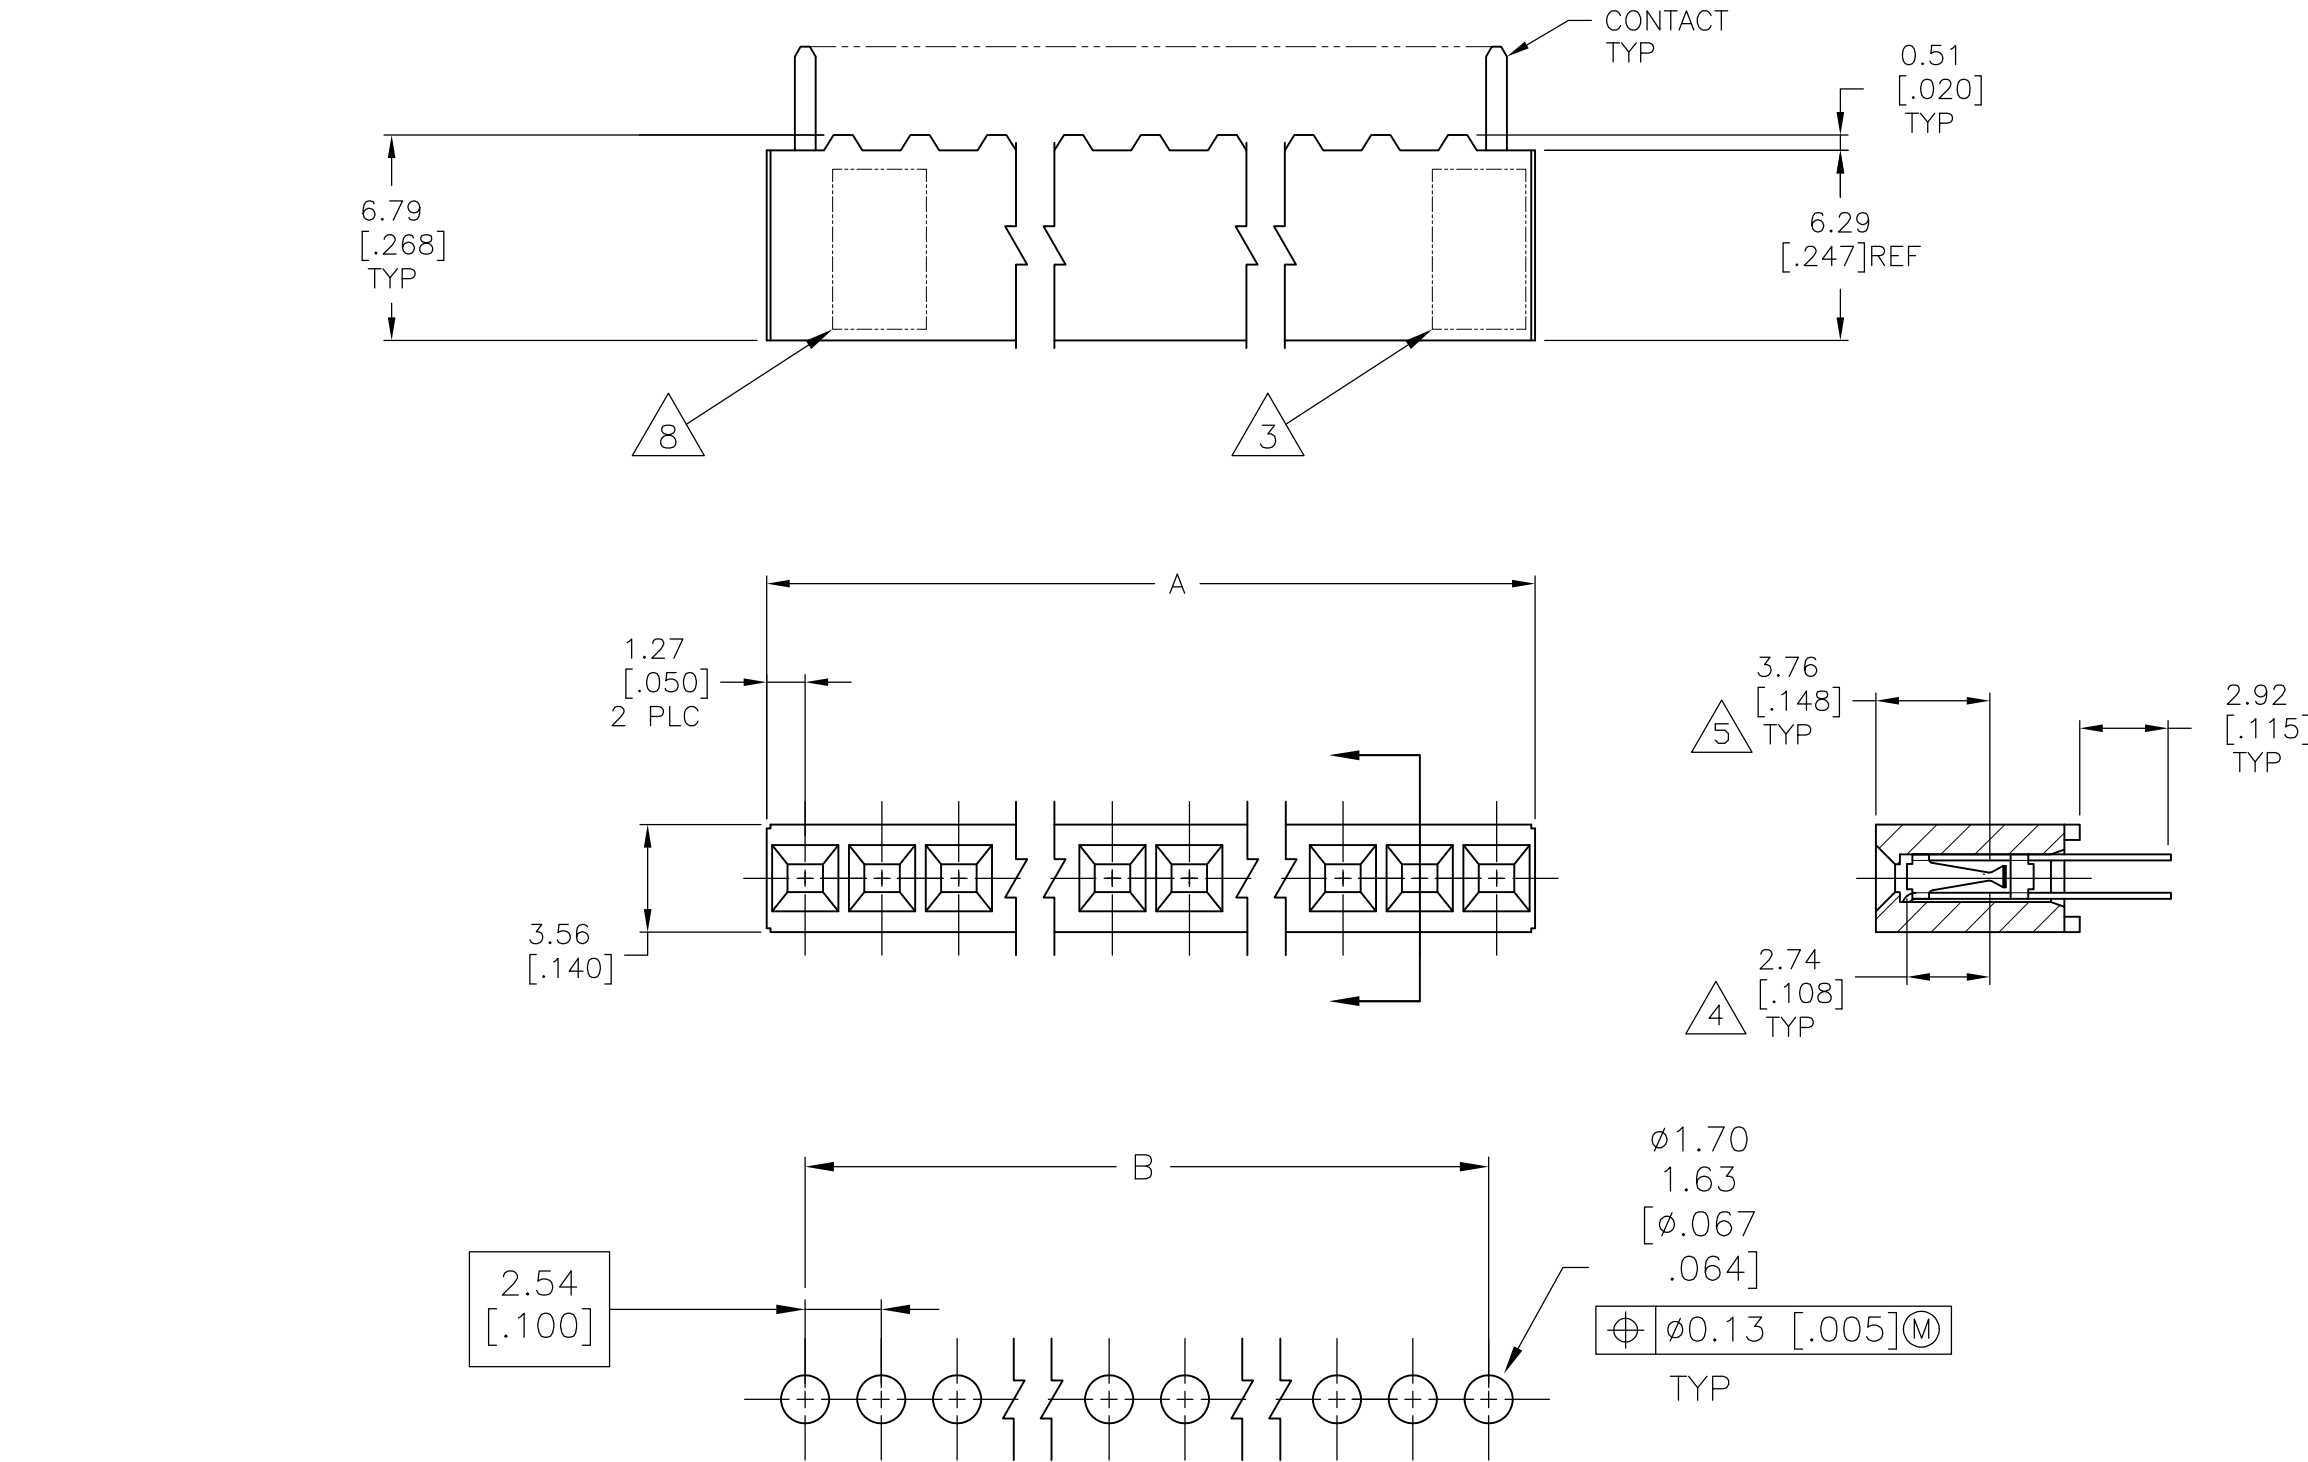

RECOMMENDED PC BOARD HOLE PATTERN

PC BOARD THICKNESS 1.57 [.062]

- 1 HOUSING: GLASS FILLED FLAME RETARDANT POLYSTER, COLOR BLACK, CONTACTS: PHOSPHOR BRONZE.
- 2 CONTACTS: DUPLEX PLATED 0.76 MICROMETERS [.000030] GOLD IN CONTACT AREA 3.81-7.62 MICROMETERS [.000150-.000300] BRIGHT TIN-LEAD ON SOLDER LEADS. ALL OVER 1.27[.000050] MIN NICKEL.
- 3 TE CONNECTIVITY, CSA LOGO MOLDED INTO HOUSING.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS, MEASURED INSIDE CONTACT BEAMS
- 5 POINT OF CONTACT DIMENSION.
- 6 CONTACTS: DUPLEX PLATED 0.76 MICROMETERS (.000030) GOLD IN CONTACT AREA 3.81-7.62 MICROMETERS (.000150-.000300) MATTE TIN ON SOLDER LEADS. ALL OVER 1.27 (.000050) MIN NICKEL.
- 7 ROHS 2002 /95/EC COMPLIANT.
- 8 PART NUMBER AND DATE CODE MARKED IN APPROXIMATE LOCATION SHOWN.
- 9 NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 10 FOR 2 POS, DATE CODES MARKED OPPOSITE SIDE OF TE CONNECTIVITY LOGO.
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

2	5.08[.200]	2.54[.100]	2	9	3-87879-9
2	12.70[.500]	10.16[.400]	5	9	3-87879-8
2	7.62[.300]	5.08[.200]	3	9	3-87879-7
2	10.16[.400]	7.62[.300]	4	9	3-87879-6
2	101.60[4.000]	99.06[3.900]	40		3-87879-5
2	99.06[3.900]	96.52[3.800]	39		3-87879-4
2	96.52[3.800]	93.98[3.700]	38		3-87879-3
2	93.98[3.700]	91.44[3.600]	37		3-87879-2
2	91.44[3.600]	88.90[3.500]	36		3-87879-1
2	88.90[3.500]	86.36[3.400]	35		3-87879-0
2	86.36[3.400]	83.82[3.300]	34		2-87879-9
2	83.82[3.300]	81.28[3.200]	33		2-87879-8
2	81.28[3.200]	78.74[3.100]	32		2-87879-7
2	78.74[3.100]	76.20[3.000]	31		2-87879-6
2	76.20[3.000]	73.66[2.900]	30		2-87879-5
2	73.66[2.900]	71.12[2.800]	29		2-87879-4
2	71.12[2.800]	68.58[2.700]	28		2-87879-3
2	68.58[2.700]	66.04[2.600]	27		2-87879-2
2	66.04[2.600]	63.50[2.500]	26		2-87879-1
2	63.50[2.500]	60.96[2.400]	25		2-87879-0
2	60.96[2.400]	58.42[2.300]	24		1-87879-9
2	58.42[2.300]	55.88[2.200]	23		1-87879-8
2	55.88[2.200]	53.34[2.100]	22		1-87879-7
2	53.34[2.100]	50.80[2.000]	21		1-87879-6
2	50.80[2.000]	48.26[1.900]	20		1-87879-5
2	48.26[1.900]	45.72[1.800]	19		1-87879-4
2	45.72[1.800]	43.18[1.700]	18		1-87879-3
2	43.18[1.700]	40.64[1.600]	17		1-87879-2
2	40.64[1.600]	38.10[1.500]	16		1-87879-1
2	38.10[1.500]	35.56[1.400]	15		1-87879-0
2	35.56[1.400]	33.02[1.300]	14		87879-9
2	33.02[1.300]	30.48[1.200]	13		87879-8
2	30.48[1.200]	27.94[1.100]	12		87879-7
2	27.94[1.100]	25.40[1.000]	11		87879-6
2	22.86[.900]	20.32[.800]	9		87879-5
2	17.78[.700]	15.24[.600]	7		87879-4
2	15.24[.600]	12.70[.500]	6		87879-3
2	25.40[1.00]	22.86[.900]	10		87879-2
2	20.32[.800]	17.78[.700]	8		87879-1
FINISH	A	B	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .127[.005]
4 PLC ± -
ANGLES ± -
FINISH

DWN J KNAUB 12-20-93
CHK A GABANY 6-28-94
APVD -
PRODUCT SPEC 108-25022
APPLICATION SPEC 114-25018
WEIGHT -
CUSTOMER DRAWING

TE Connectivity

CONNECTOR ASSEMBLY, MOD IV, SINGLE ROW .100CL, DUAL ENTRY

SIZE A2 CAGE CODE 00779 DRAWING NO C=87879

RESTRICTED TO -

SCALE 4:1

SHEET 1 of 2


REV AA3

1471-9 (3/11)

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

	109	6	5.08[.200]	2.54[.100]	2	7	8-87879-9
9	OBSOLETE	6	12.70[.500]	10.16[.400]	5	7	8-87879-8
	9	6	7.62[.300]	5.08[.200]	3	7	8-87879-7
9	OBSOLETE	6	10.16[.400]	7.62[.300]	4	7	8-87879-6
	OBSOLETE	6	101.60[4.000]	99.06[3.900]	40	7	8-87879-5
		6	99.06[3.900]	96.52[3.800]	39	7	8-87879-4
		6	96.52[3.800]	93.98[3.700]	38	7	8-87879-3
		6	93.98[3.700]	91.44[3.600]	37	7	8-87879-2
		6	91.44[3.600]	88.90[3.500]	36	7	8-87879-1
		6	88.90[3.500]	86.36[3.400]	35	7	8-87879-0
		6	86.36[3.400]	83.82[3.300]	34	7	7-87879-9
		6	83.82[3.300]	81.28[3.200]	33	7	7-87879-8
		6	81.28[3.200]	78.74[3.100]	32	7	7-87879-7
		6	78.74[3.100]	76.20[3.000]	31	7	7-87879-6
		6	76.20[3.000]	73.66[2.900]	30	7	7-87879-5
		6	73.66[2.900]	71.12[2.800]	29	7	7-87879-4
		6	71.12[2.800]	68.58[2.700]	28	7	7-87879-3
		6	68.58[2.700]	66.04[2.600]	27	7	7-87879-2
		6	66.04[2.600]	63.50[2.500]	26	7	7-87879-1
	6	63.50[2.500]	60.96[2.400]	25	7	7-87879-0	
	OBSOLETE	6	60.96[2.400]	58.42[2.300]	24	7	6-87879-9
		6	58.42[2.300]	55.88[2.200]	23	7	6-87879-8
		6	55.88[2.200]	53.34[2.100]	22	7	6-87879-7
		6	53.34[2.100]	50.80[2.000]	21	7	6-87879-6
		6	50.80[2.000]	48.26[1.900]	20	7	6-87879-5
		6	48.26[1.900]	45.72[1.800]	19	7	6-87879-4
		6	45.72[1.800]	43.18[1.700]	18	7	6-87879-3
		6	43.18[1.700]	40.64[1.600]	17	7	6-87879-2
		6	40.64[1.600]	38.10[1.500]	16	7	6-87879-1
	OBSOLETE	6	38.10[1.500]	35.56[1.400]	15	7	6-87879-0
		6	35.56[1.400]	33.02[1.300]	14	7	5-87879-9
		6	33.02[1.300]	30.48[1.200]	13	7	5-87879-8
		6	30.48[1.200]	27.94[1.100]	12	7	5-87879-7
		6	27.94[1.100]	25.40[1.000]	11	7	5-87879-6
	OBSOLETE	6	22.86[.900]	20.32[.800]	9	7	5-87879-5
		6	17.78[.700]	15.24[.600]	7	7	5-87879-4
		6	15.24[.600]	12.70[.500]	6	7	5-87879-3
	OBSOLETE	6	25.40[1.00]	22.86[.900]	10	7	5-87879-2
		6	20.32[.800]	17.78[.700]	8	7	5-87879-1
	FINISH	A	B	NO OF POSN	PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12-20-93 J KNAUB CHK 6-28-94 A GABANY		 TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME CONNECTOR ASSEMBLY, MOD IV, SINGLE ROW .100CL, DUAL ENTRY —			
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .127[.005] 4 PLC ± — ANGLES ± ±		PRODUCT SPEC 108-25022 APPLICATION SPEC 114-25018		SIZE A2	
MATERIAL 		FINISH  		WEIGHT —		CAGE CODE 00779	
				DRAWING NO C=87879		RESTRICTED TO —	
CUSTOMER DRAWING						SCALE 1:1	
						SHEET 2 of 2	
						REV AA3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-87879-6](#)