
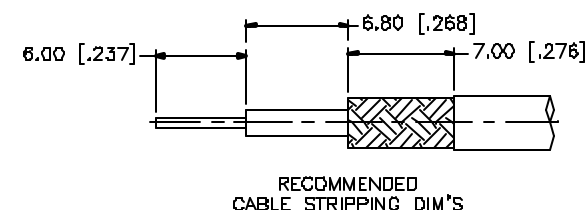



REV.	DATE	DESCRIPTION
NC	03/08/05	INITIAL RELEASE

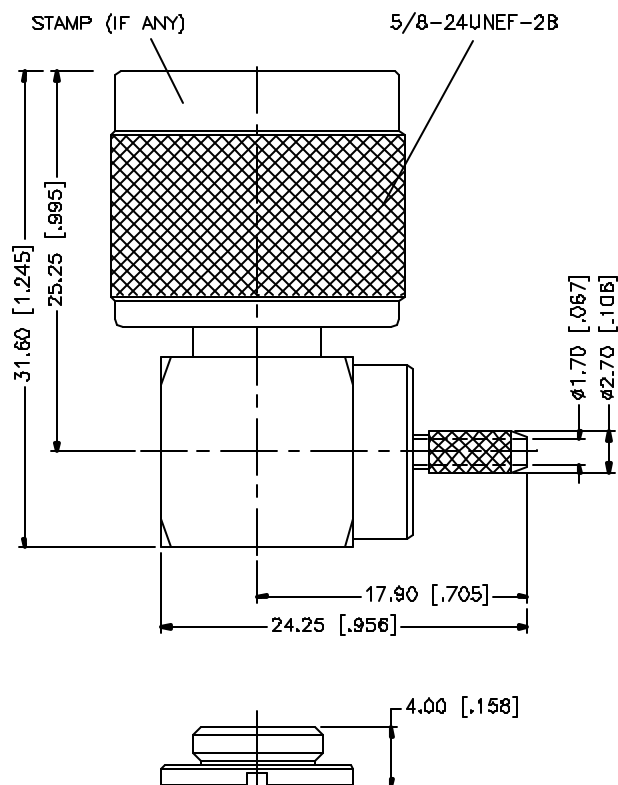

NOTE:

1. CRIMPED FERRULE
HEX. CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	03/08/05										
7						CHECKED				PART DESCRIPTION N R/A CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)								
6						ISSUED												
5	CLAMP NUT	BRASS	NEXCOTE	1		SHEET	1 OF 1				PART NO. 172245							
4	FERRULE	COPPER	NEXCOTE	1	C:/172/172245.DWG				DWG. NO.						172245.DWG		REV.	NC
3	CONTACT PIN	BRASS	GOLD	1														
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY	BRASS	NEXCOTE	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[172245](#)