
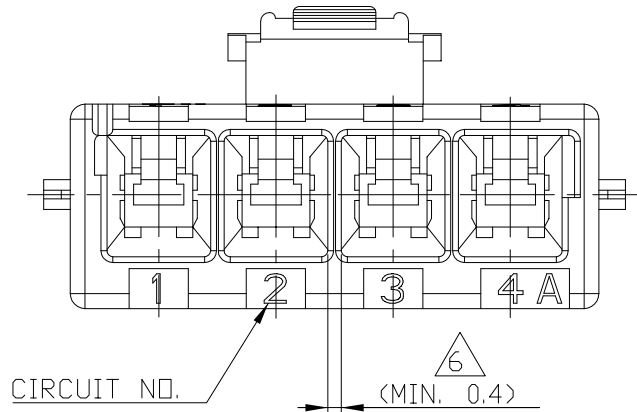
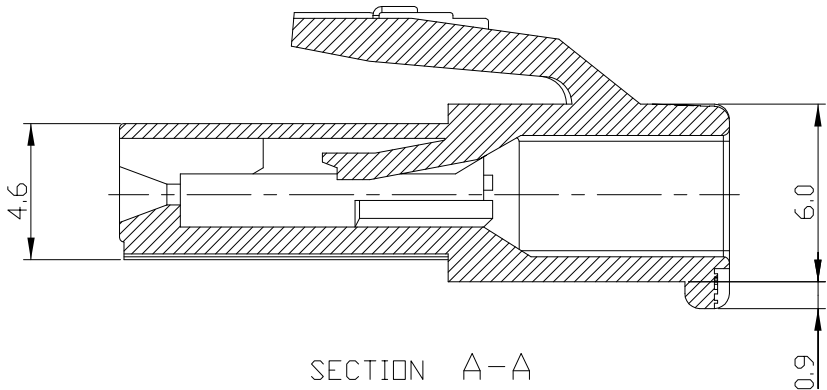
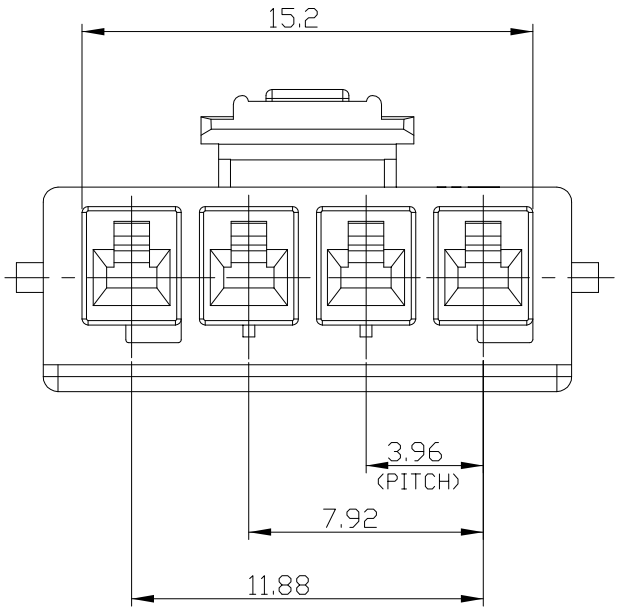


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20		LOC		DIST		REVISIONS							
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.						DS		—		P	LTR	DESCRIPTION			DATE	DWN	APVD
											A	RELEASED			01.OCT'09	SC	JK

NOTE;
1.APPLICABLE CONTACT P/N
-REC CONTACT:177915- □(AWG#16-#20)
:177914- □(AWG#22-#26)
2.MATING CONN.P/N
-TAB CONTACT:177917- □(AWG#16-#20)
177916- □(AWG#22-#26)
3.APPLICABLE DOUBLE LOCK PLATE:177920-1
*IT SHOULD BE USED CERTAINLY WHEN CABLE ASS'Y
4.GENERAL TOLERANCES:±0.3
5.ACCORDING TO IEC 60335-1 4.2 EDITION
-PART MEETS GWT 750°& 850°C.
-MATERIAL MEETS BALL PRESSURE TESTING AT 125°C.
-MATERIAL HAS CTI VALUE OF 250V.
△ MIN.THICKNESS OF INSULATING WALL

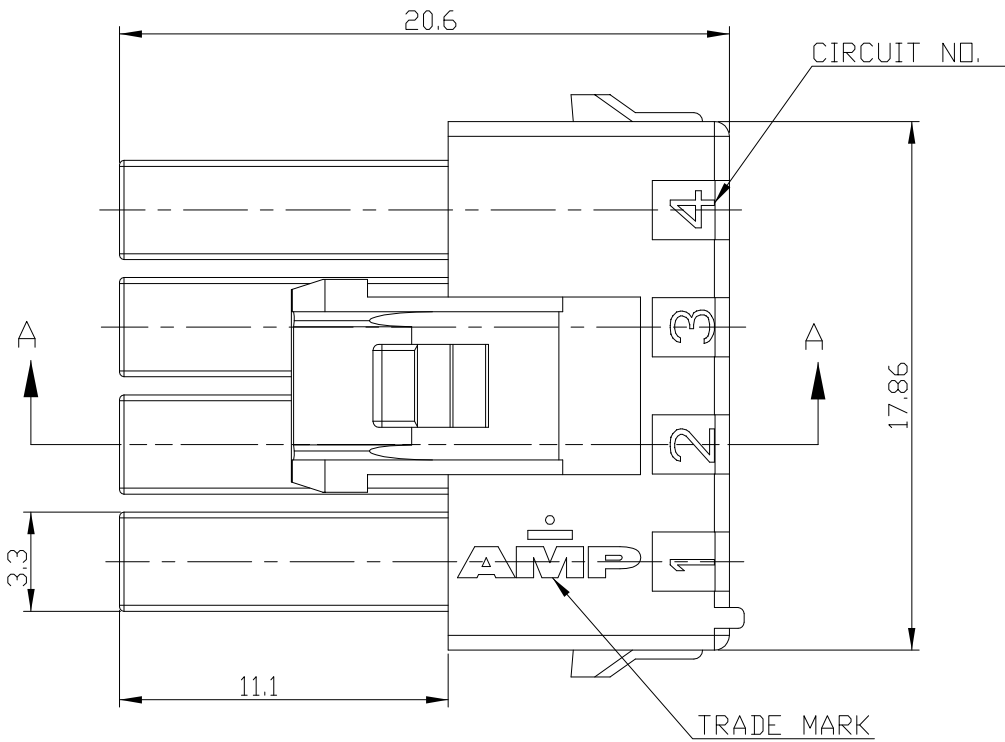

2005251-6	BLUE
2005251-4	YELLOW
2005251-1	NATURAL
P/N	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN SC KIM	Tyco Electronics Kyungsan, Korea		
DIMENSIONS: mm		CHK BW KANG			
		APVD JK SONG	NAME		
		PRODUCT SPEC 108-61106	PDL 4P PLUG HSG 3.96mm S/R (GWT)		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO
0 PLC ±— 1 PLC ±0.1 2 PLC ±0.01 3 PLC ±0.001 4 PLC ±0.0001 ANGLES ±—		WEIGHT —	A3	00779	2005251
MATERIAL PA66 (UL94V-0)		FINISH —	RESTRICTED TO		
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1	REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2005251-4](#)