

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705450048

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Header, Single Row 3.05mm Pocket Vertical, Shrouded, with Press-fit Plastic Peg, 14 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400-001 (PDF)

Product Specification PS-70541-001 (PDF)

Product Specification TS-70541-100-001 (PDF)


Packaging Specification PK-70873-0014 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification		
CSA		LR19980
UL		E29179
General		
Product Family		PCB Headers
Series		70545
Application		Signal, Wire-to-Board
Overview		SL Modular Connectors
Product Name		SL
UPC		800753597730

Physical	
Breakaway	No
Circuits (Loaded)	14
Circuits (maximum)	14
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.775/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical	
Current - Maximum per Contact	3.0A

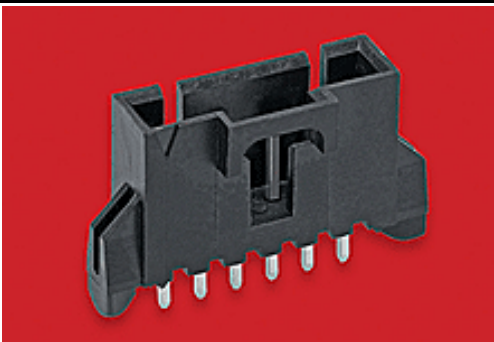

Series image - Reference only

EU ELV Not Relevant	
EU RoHS Compliant	China RoHS
REACH SVHC Not Contained Per - ED/61/2018 (27 June 2018)	
Halogen-Free Status Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
70545 Series

Mates With
SL Crimp Housing 70066 Option N, 70066
Option G, 70066 Option A, 70430 Option G,
70400 Option G

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	003
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Engineering Number	A-70545-0048
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0014
Product Specification	PS-70400-001, PS-70541-001, TS-70541-100-001
Sales Drawing	SDA-70545-****

This document was generated on 11/05/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

70545-0048