


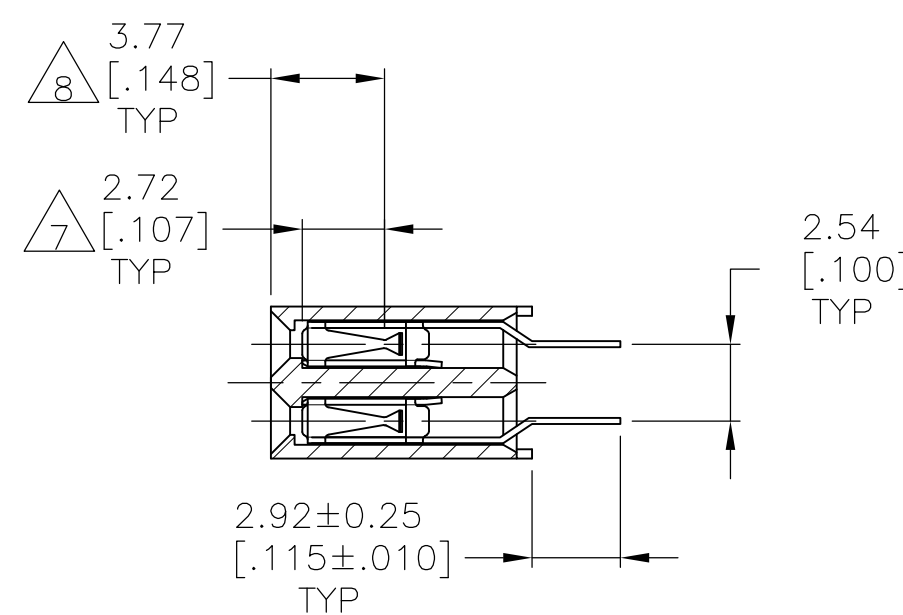

- 1 HOUSING: FLAME RETARDANT, GLASS FILLED, POLYESTER, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE
- 2 CONTACT: DUPLEX PLATED $0.25\mu\text{m} [.000010]$ MIN GOLD IN CONTACT
AREA, $3.81-7.62\mu\text{m} [.000150-.000300]$ BRIGHT TIN-LEAD ON LEADS
ALL OVER $1.27\mu\text{m} [.000050]$ MINIMUM NICKEL.
- 3 THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY – NOT TO
CONTACT LOCATIONS
- 4 MARK PART NUMBER AND DATE CODE IN APPROXIMATE LOCATION SHOWN,
EITHER SIDE.
- 5 TOLERANCE IS NON-CUMULATIVE.
- 6 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE LOGO.
- 7 POINT-OF-MEASUREMENT DIMENSION FOR PLATING
THICKNESS (INSIDE CONTACT BEAM).
- 8 POINT-OF-CONTACT DIMENSION.
- 9 NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 10 TE LOGO AND CSA LOGO ARE MOLDED INTO HOUSING.
- 11 CONTACT: DUPLEX PLATED $0.25\mu\text{m} [.000010]$ MIN GOLD IN CONTACT
AREA, $3.81-7.62\mu\text{m} [.000150-.000300]$ MATTE TIN ON LEADS
ALL OVER $1.27\mu\text{m} [.000050]$ MINIMUM NICKEL
- 12 ROHS 2002/95/EC COMPLIANT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 06NOV2002		 TE Connectivity				
		CHK J.OLSON 06NOV02						
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, TOP ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU				
		APVD J.OLSON 06NOV02						
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-25022						
MATERIAL 		APPLICATION SPEC 114-25018						
FINISH 		WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO C-147424	RESTRICTED TO -	
CUSTOMER DRAWING						SCALE 4:1	SHEET 1 OF 2	REV F7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-147424-5](#)