

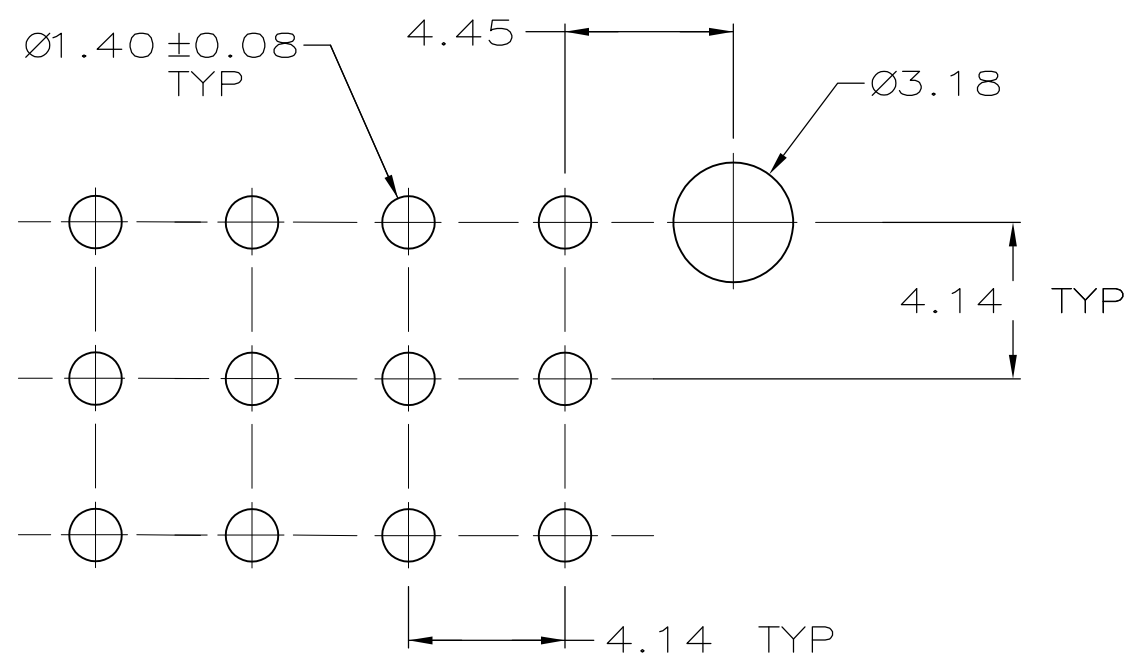


LOC	DIST	REVISIONS					
CM	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M	REVISED PER ECR-15-010337	23JUL2015	RK	SC

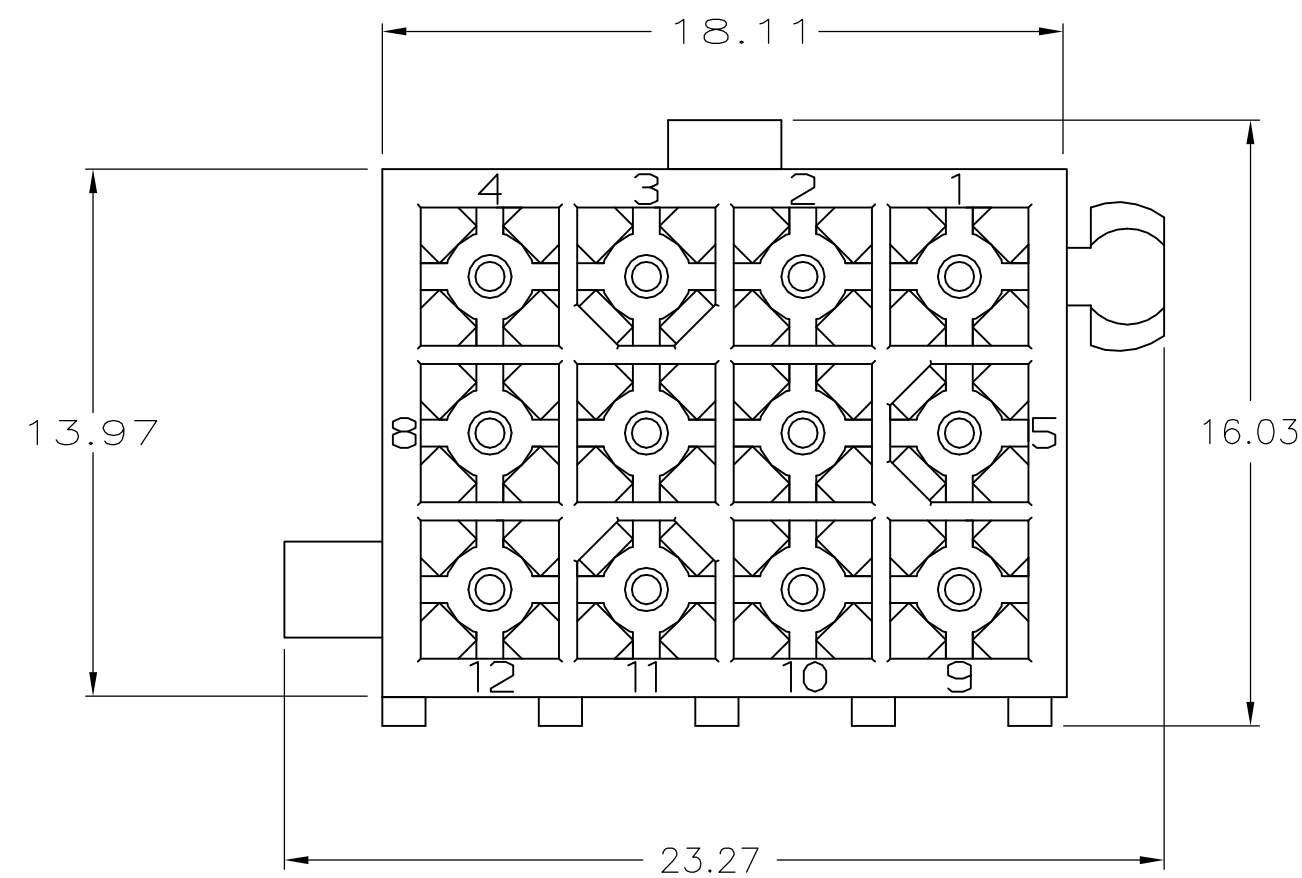

RECOMMENDED LAYOUT FOR 1.57 THICK BOARD
TOLERANCES NON-ACCUMULATIVE

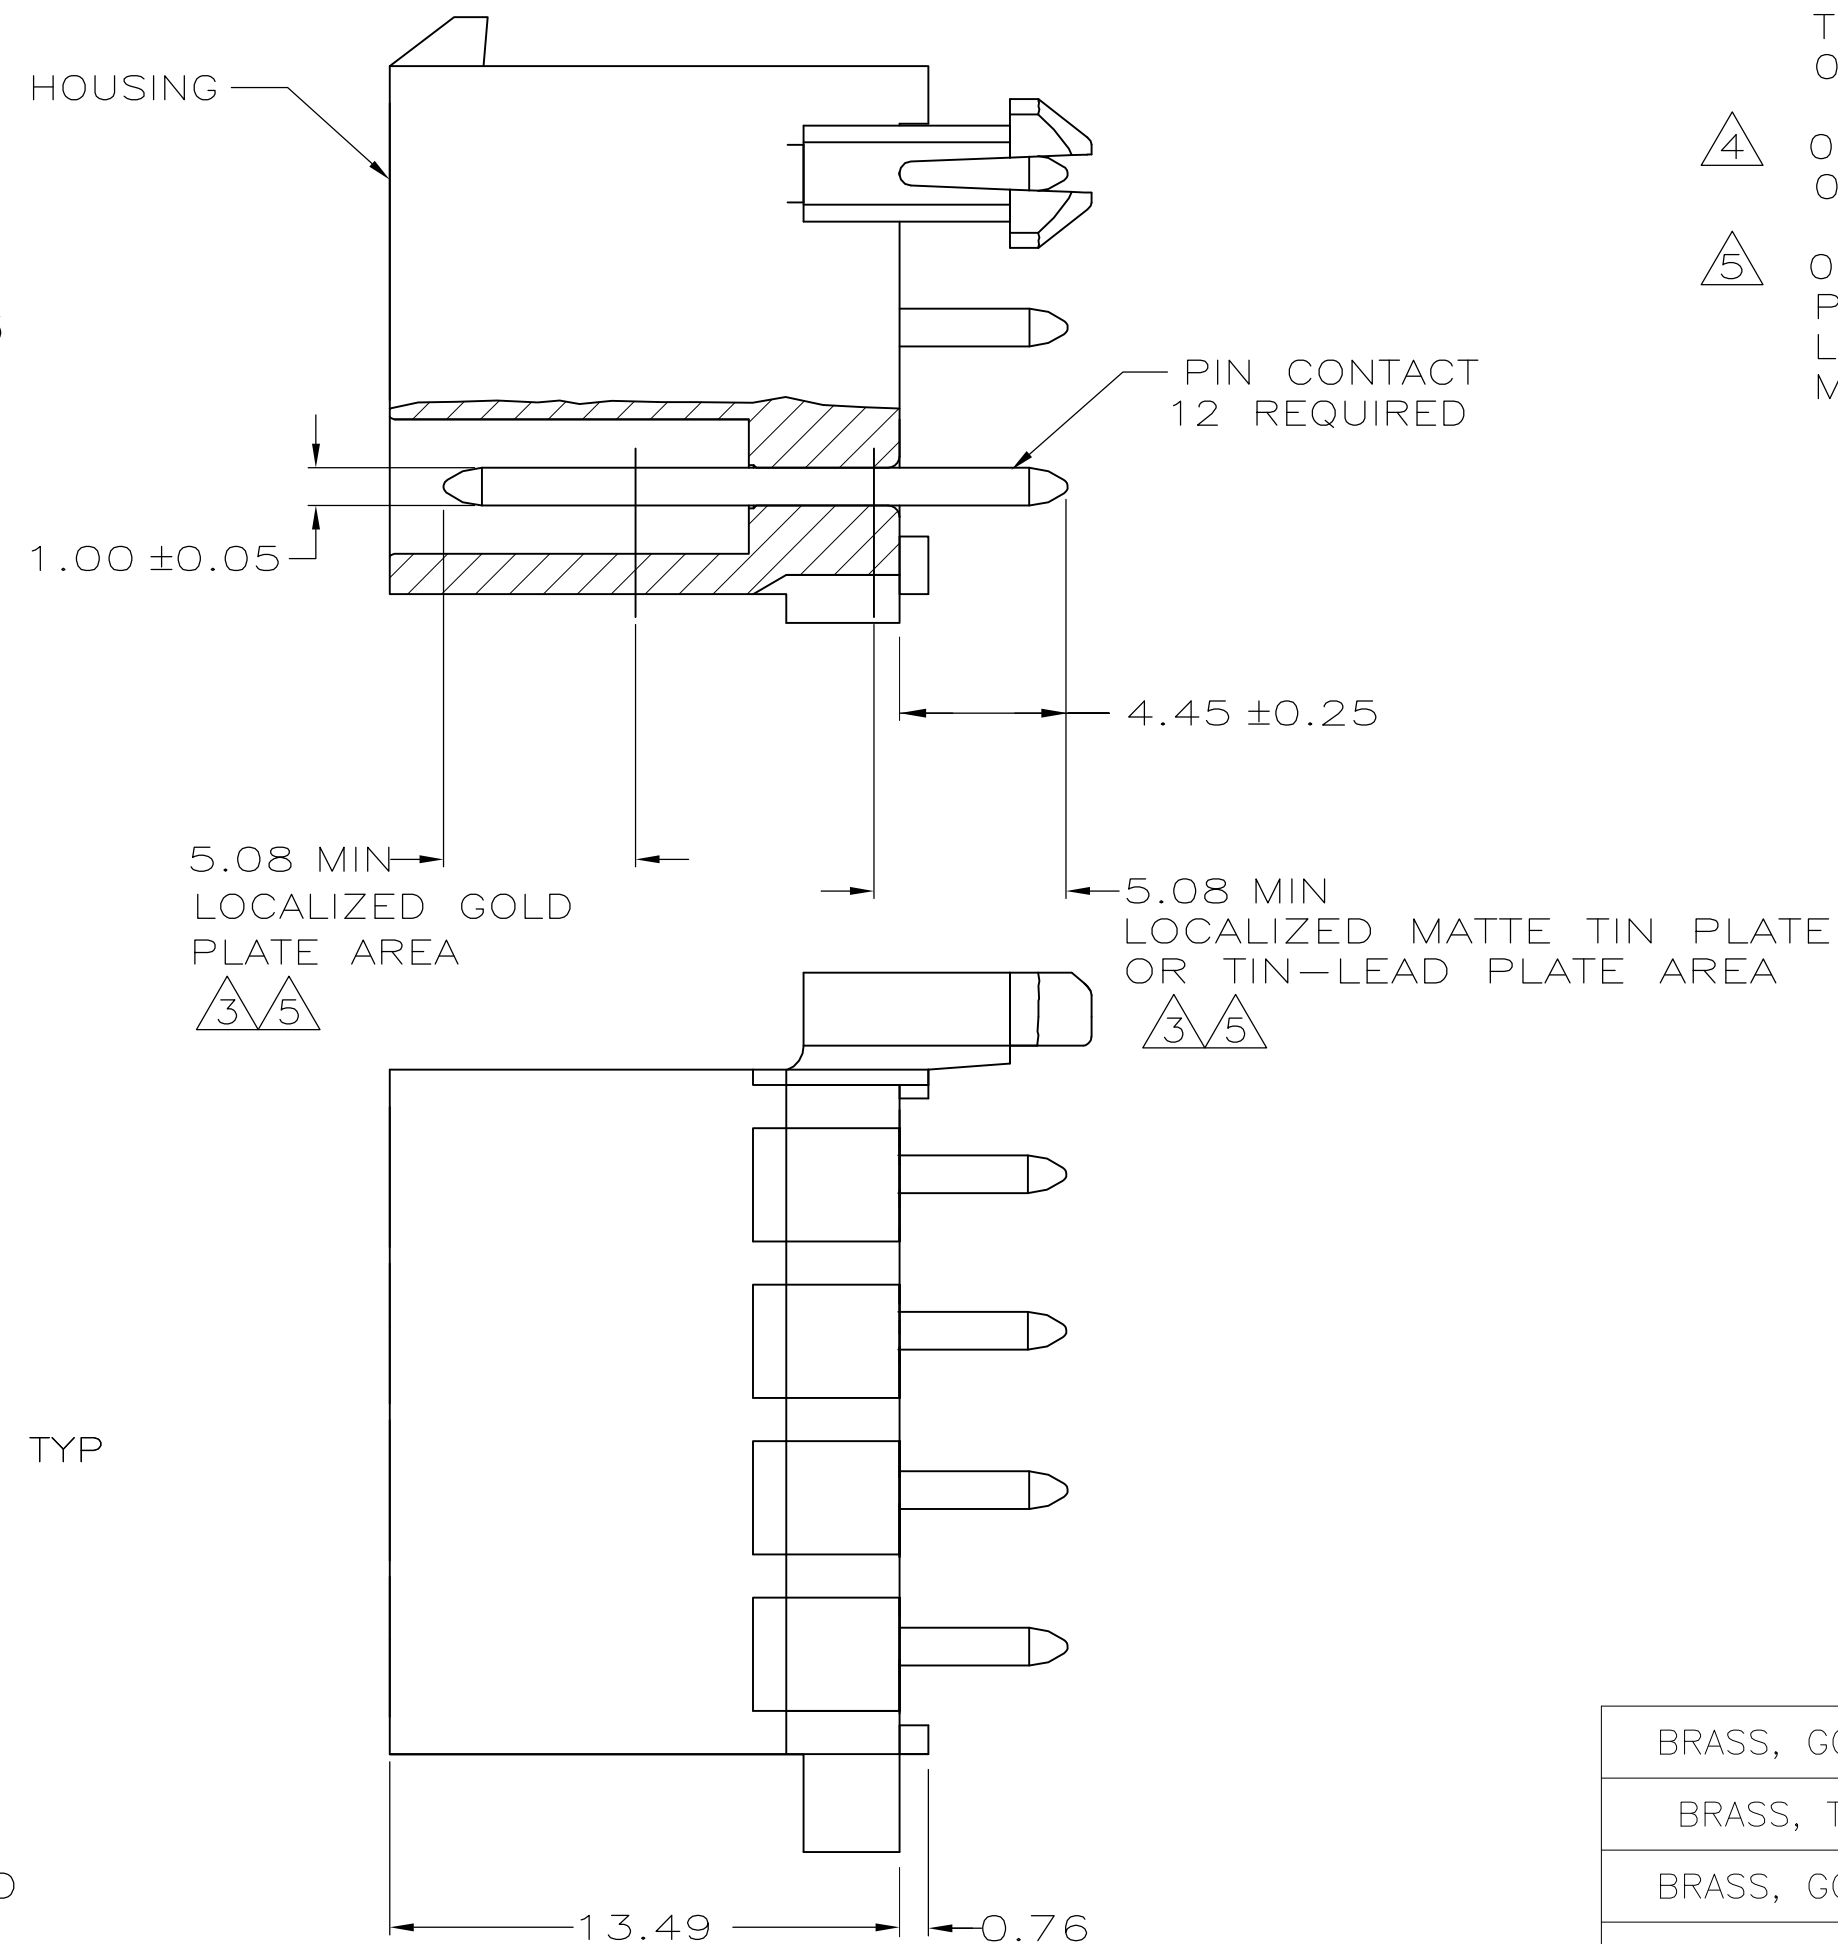

1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
2. 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
3. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
4. 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
5. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

BRASS, GOLD		NYLON, UL94V-0	WHITE	1-770186-1
BRASS, TIN		NYLON, UL94V-0	WHITE	1-770186-0
BRASS, GOLD		NYLON, UL94V-0	WHITE	770186-2
BRASS, TIN-LEAD		NYLON, UL94V-0	WHITE	770186-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
PIN		HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER 08JUN05		 TE Connectivity					
		CHK R JONES 28JUL2003							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HEADER ASSEMBLY, 12 CKT, MINI UNIVERSAL MATE-N-LOK —					
mm		APVD R JONES 28JUL2003							
		PRODUCT SPEC							
		—							
		APPLICATION SPEC							
		—							
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
—		—		A2	00779	C-770186	—		
CUSTOMER DRAWING				SCALE	5:1	SHEET	1 of 1	REV	M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[770186-2](#)