


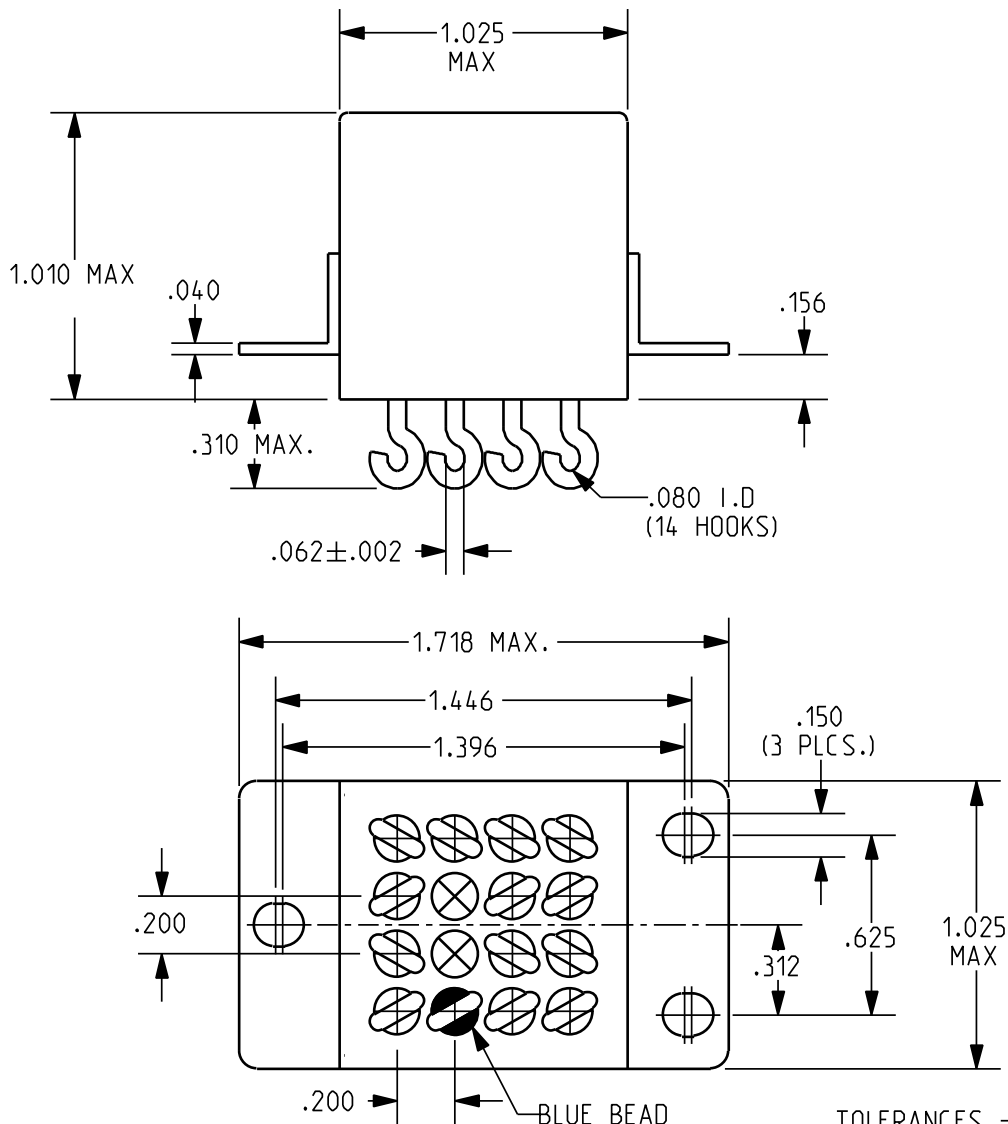

REV. B
DCO 300859


TOLERANCES $\pm .010$ " - UNLESS
OTHERWISE SPECIFIED

COIL: @ 25°C
RESISTANCE 290 OHMS $\pm 10\%$
NOMINAL VOLTAGE 28 VDC
MUST OPERATE 13.5 VDC MAX.
MUST RELEASE 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:
VIBRATION 10 Hz TO 3000 Hz @ 30 g's
SHOCK 200 g's 6 MS. DURATION
TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 15 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

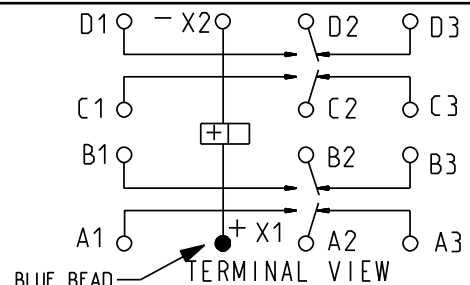

CONTACT RATING: LOW LEVEL
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
100,000 OPERATIONS

DR. B.D. 16MAY2008 CK. J.M.B. 5/19/08

Tyco Electronics

©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL
CUST. NO. M83536/15-021M REV. ----

TE NUMBER
1617754-2

CII PART NUMBER
FCA-410-1521M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[M83536/15-021M](#)