


BS88, IEC269 Industrial HRC Fuse Links

Offset Bolted Tags 550V ac



BAO

Time-Current Characteristic Curves

Non Motor Rated

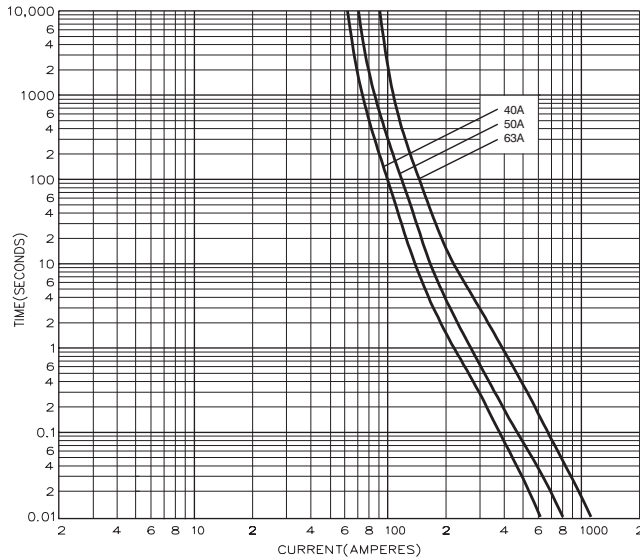


Motor Rated

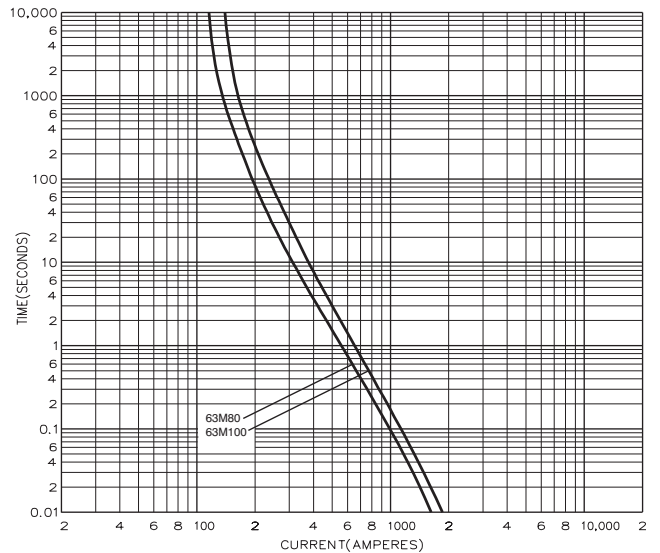

Offset Bolted Tag

Dimensional Data

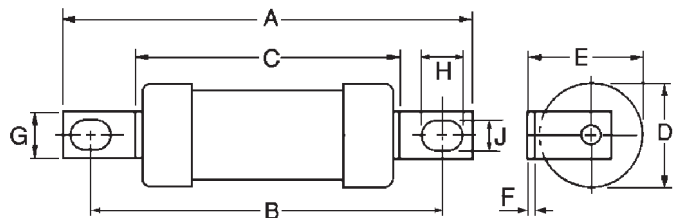

Catalog' Number	I ² t (Amps ² Seconds)			Nom. Watts Loss	Rated Voltage	Dimensions (mm)								
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	C	D	E	F	G	H	J
BAO40	40	1400	3600	4.7	550 ac	87.0	73.5	54.5	21.0	22.5	1.20	12.7	18.0	5.5
BAO50	50	3000	8000	4.9										
BAO63	63	6700	18,800	5.6										
BAO63M80	63M80	12,600	33,900	4.4										
BAO63M100	63M100	24,000	72,900	3.4										

Packaging - 20 per carton

This bulletin is intended to clearly present product data and provide technical information that will help the end user with design applications. If there is any information that you require that is not recorded on this Data Sheet, please call our Application Engineers at Bussmann UK. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Bussmann Division
Cooper (U.K.) Ltd
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom
 Tel: (44) (0)1509 88 27 37
 Fax: (44) (0)1509 88 27 86

Head Office
 St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450

Bussmann WEB site - <http://www.bussmann.com>

A **COOPER** Industries Company

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[BAO40](#)