




RECOMMENDED P.C. BOARD LAYOUT

$\triangle 10$	BAC 17-12049-11	.0625	-	.120	-	4.764	5.070	47	4-582843-5
$\triangle 10$	BAC 17-12049-9	.0625	-	.120	-	4.164	4.470	41	4-582843-4
$\triangle 10$	BAC 17-12049-7	.0625	-	.120	-	3.564	3.870	35	4-582843-3
$\triangle 10$	BAC 17-12049-5	.0625	-	.120	-	2.964	3.270	29	4-582843-2
$\triangle 10$	BAC 17-12049-3	.0625	-	.120	-	2.364	2.670	23	4-582843-1
$\triangle 10$	BAC 17-12049-1	.0625	-	.120	-	1.764	2.070	17	4-582843-0
$\triangle 10$		.125	-	.183	-	4.764	5.070	47	3-582843-6
		.125	-	.183	-	4.164	4.470	41	3-582843-5
		.125	-	.183	-	3.564	3.870	35	3-582843-4
		.125	-	.183	-	2.964	3.270	29	3-582843-3
		.125	-	.183	-	2.364	2.670	23	3-582843-2
		.125	-	.183	-	1.764	2.070	17	3-582843-1
		.125	.381	.183	5.363	4.764	5.623	47	3-582843-0
		.125	.265	.183	4.530	4.164	4.790	41	2-582843-9
		.125	.265	.183	3.930	3.564	4.190	35	2-582843-8
		.125	.265	.183	3.330	2.964	3.590	29	2-582843-7
		.125	.265	.183	2.730	2.364	2.990	23	2-582843-6
		.125	.265	.183	2.130	1.764	2.390	17	2-582843-5
		.0937	-	.152	-	4.764	5.070	47	2-582843-4
		.0937	-	.152	-	4.164	4.470	41	2-582843-3
		.0937	-	.152	-	3.564	3.870	35	2-582843-2
		.0937	-	.152	-	2.964	3.270	29	2-582843-1
		.0937	-	.152	-	2.364	2.670	23	2-582843-0
		.0937	-	.152	-	1.764	2.070	17	1-582843-9
		.0937	.381	.152	5.363	4.764	5.623	47	1-582843-8
		.0937	.265	.152	4.530	4.164	4.790	41	1-582843-7
		.0937	.265	.152	3.930	3.564	4.190	35	1-582843-6
		.0937	.265	.152	3.330	2.964	3.590	29	1-582843-5
		.0937	.265	.152	2.730	2.364	2.990	23	1-582843-4
		.0625	-	.120	-	4.764	5.070	47	1-582843-3
		.0625	-	.120	-	4.164	4.470	41	1-582843-2
		.0625	-	.120	-	3.564	3.870	35	1-582843-1
		.0625	-	.120	-	2.964	3.270	29	1-582843-0
		.0625	-	.120	-	2.364	2.670	23	582843-9
		.0625	-	.120	-	1.764	2.070	17	582843-8
		.0625	.381	.120	5.363	4.764	5.623	47	582843-7
		.0625	.265	.120	4.530	4.164	4.790	41	582843-6
		.0625	.265	.120	3.930	3.564	4.190	35	582843-5
		.0625	.265	.120	3.330	2.964	3.590	29	582843-4
		.0625	.265	.120	2.730	2.364	2.990	23	582843-3
		.0625	.265	.120	2.130	1.764	2.390	17	582843-2
$\triangle 11$		.0937	.265	.152	2.730	2.364	2.990	23	582843-1
MARKING	P.C. BD. THICKNESS	E	D	$\triangle 12$	C	B	A	NO. OF CONT.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG T.ALEXANDER 05-JUN-95		TE Connectivity	
CHK J.WARNER 23-AUG-95		APVD J.WARNER 23-AUG-95			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± -		APPLICATION SPEC	
		1 PLC ± -		SIZE	
		2 PLC ± -		CAGE CODE	
		3 PLC ± .005 [0.13]		DRAWING NO	
4 PLC ± -		WEIGHT		RESTRICTED TO	
ANGLES ± -		MATERIAL		REV	
FINISH		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 2	

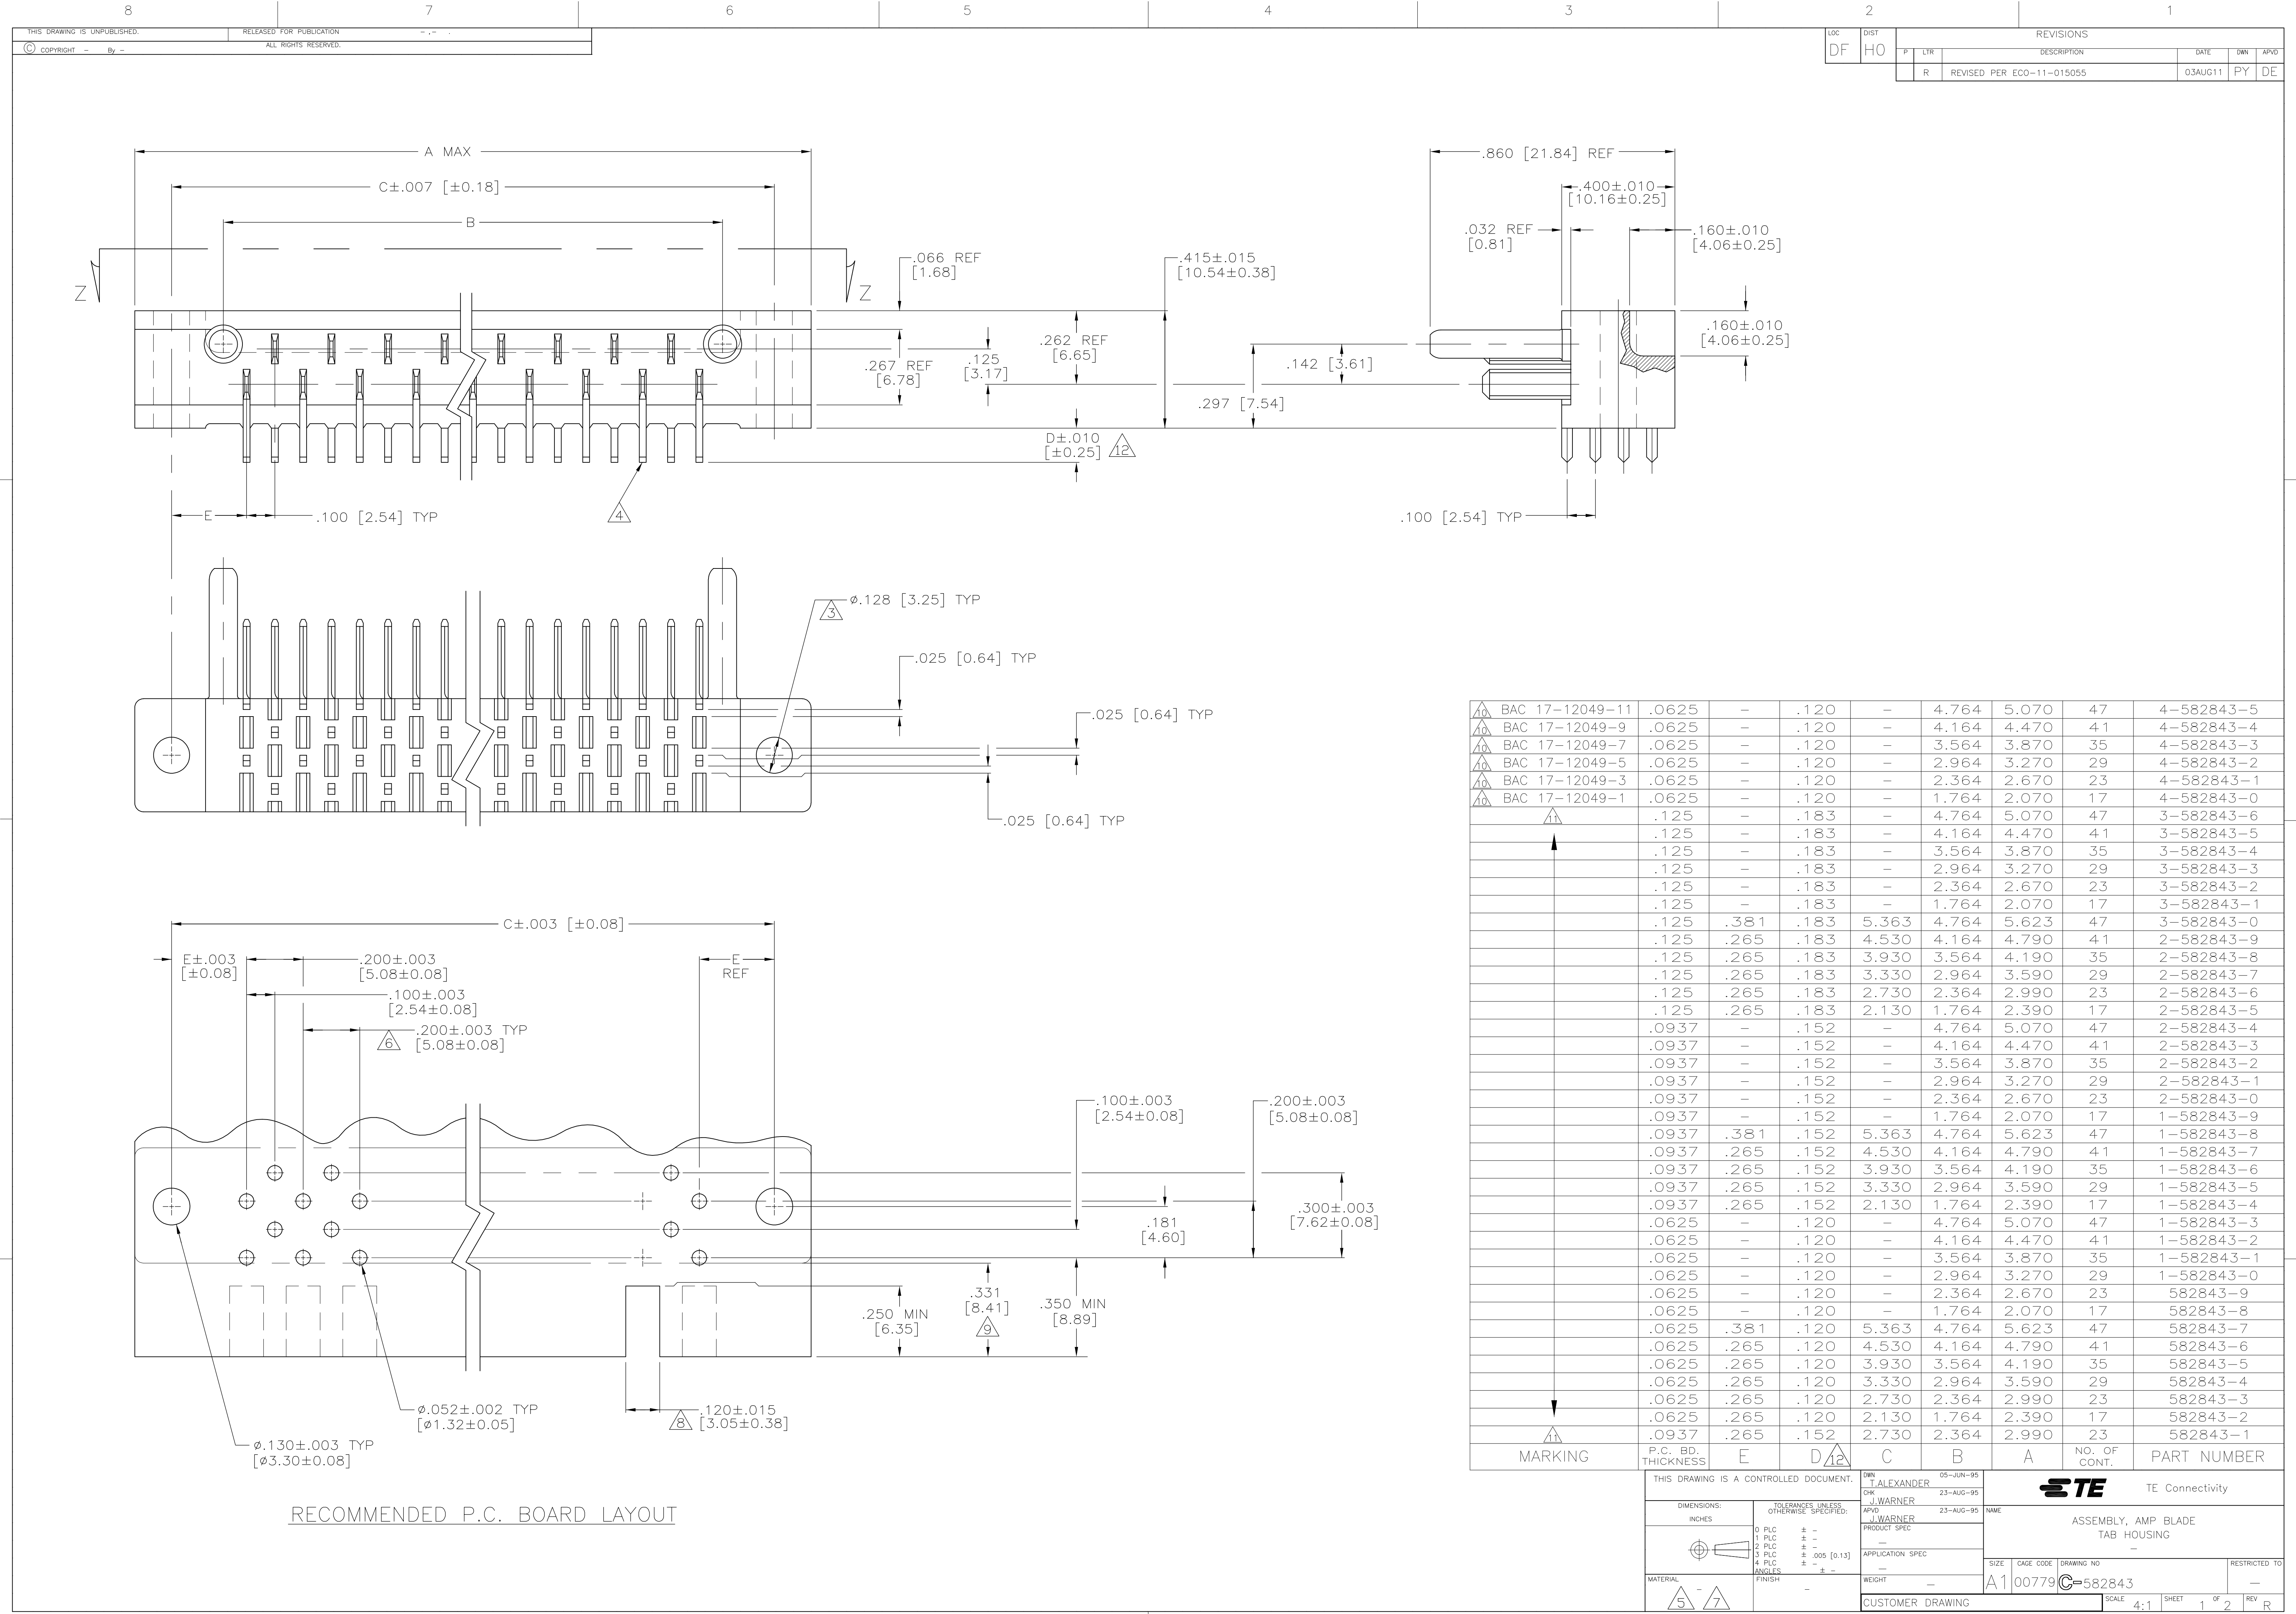

- | | |
|----|--|
| 3 | MOUNTING HOLES. |
| 4 | POST TO BE SOLDER DIPPED.
CONN. MUST MEET REQUIREMENTS OF MIL-STD-202 METHOD 208. |
| 5 | CONTACT MATL.; GILDING METAL. GOLD OVER NICKEL. |
| 6 | TOLERANCE NON CUMULATIVE. |
| 7 | TAB-HOUSING MATL.; DIALLYL PHTHALATE, GLASS FILLED PER MIL-M-14, TYPE S.D.G.-F.
COLOR; GREEN. |
| 8 | CUT OUT FOR KEYING BOSS, LOCATED WHERE REQD. (OPTIONAL) |
| 9 | FROM EDGE OF P.C. BOARD TO FACE OF TAB-HOUSING. |
| 10 | TE CONNECTIVITY P/N NOT TO BE MARKED ON PART.
CAGE CODE #00779, DATE CODE, & CUSTOMER P/N TO BE MARKED ON PART, SEE TABLE. |
| 11 | TE CONNECTIVITY PART NUMBER, DATE CODE AND MILITARY PART NUMBER .062 HIGH, MARKED THIS AREA AND ALL EVEN NUMBERED CONTACTS MARKED THIS AREA. |
| 12 | "D" DIMENSION APPLIES TO CONTACT ONLY PRIOR TO SOLDER DIPPING. |

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-582843-6](#)