
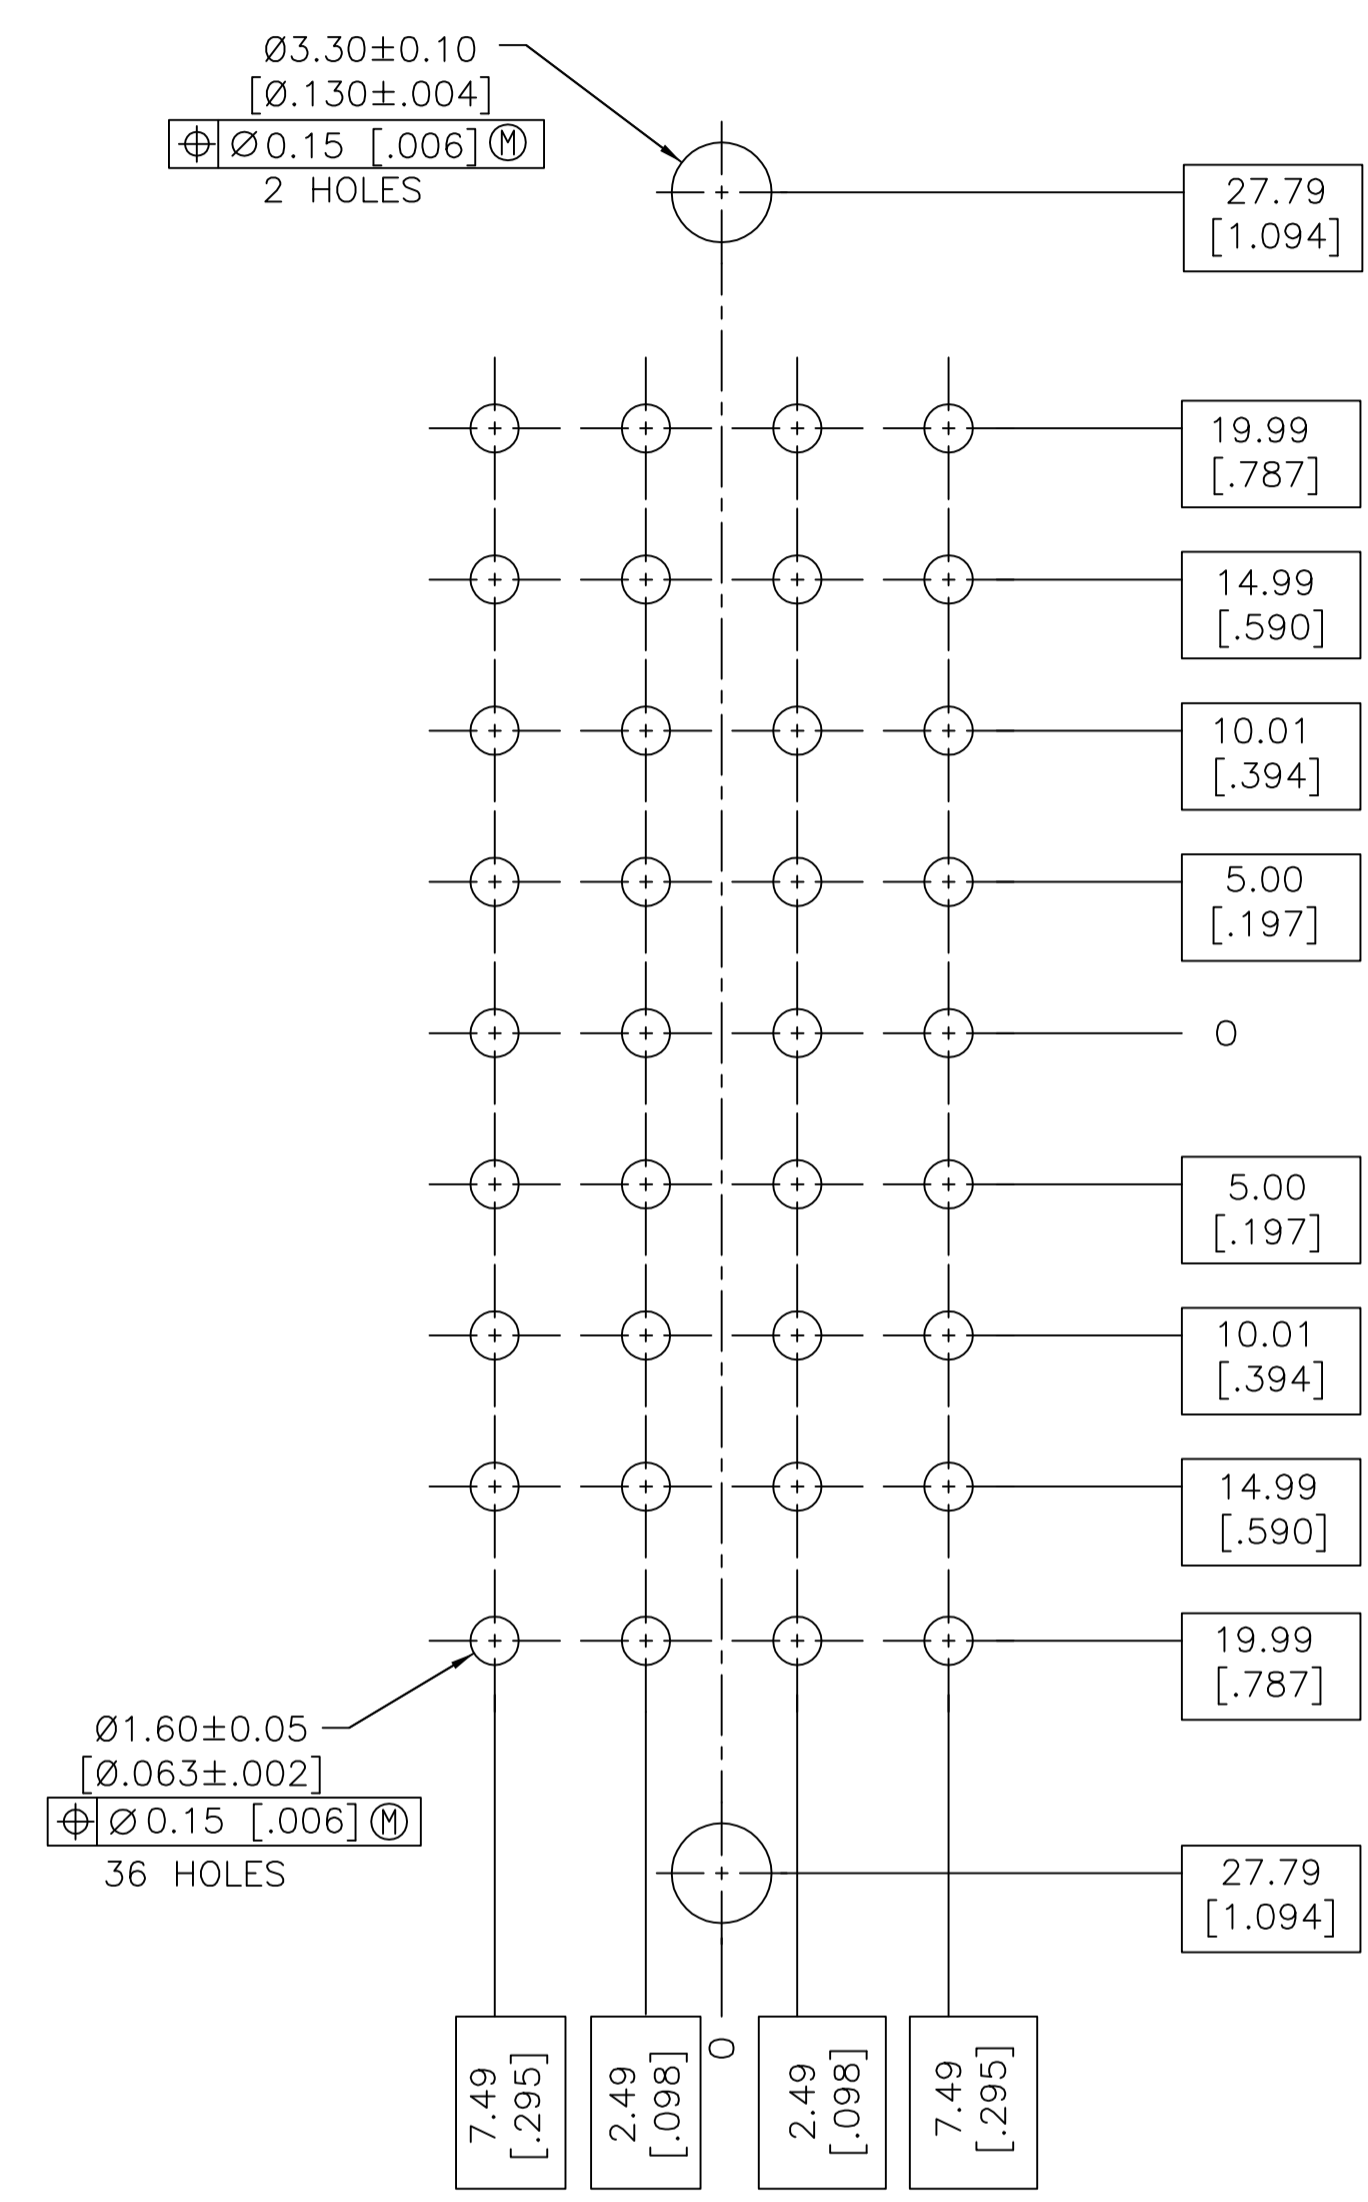
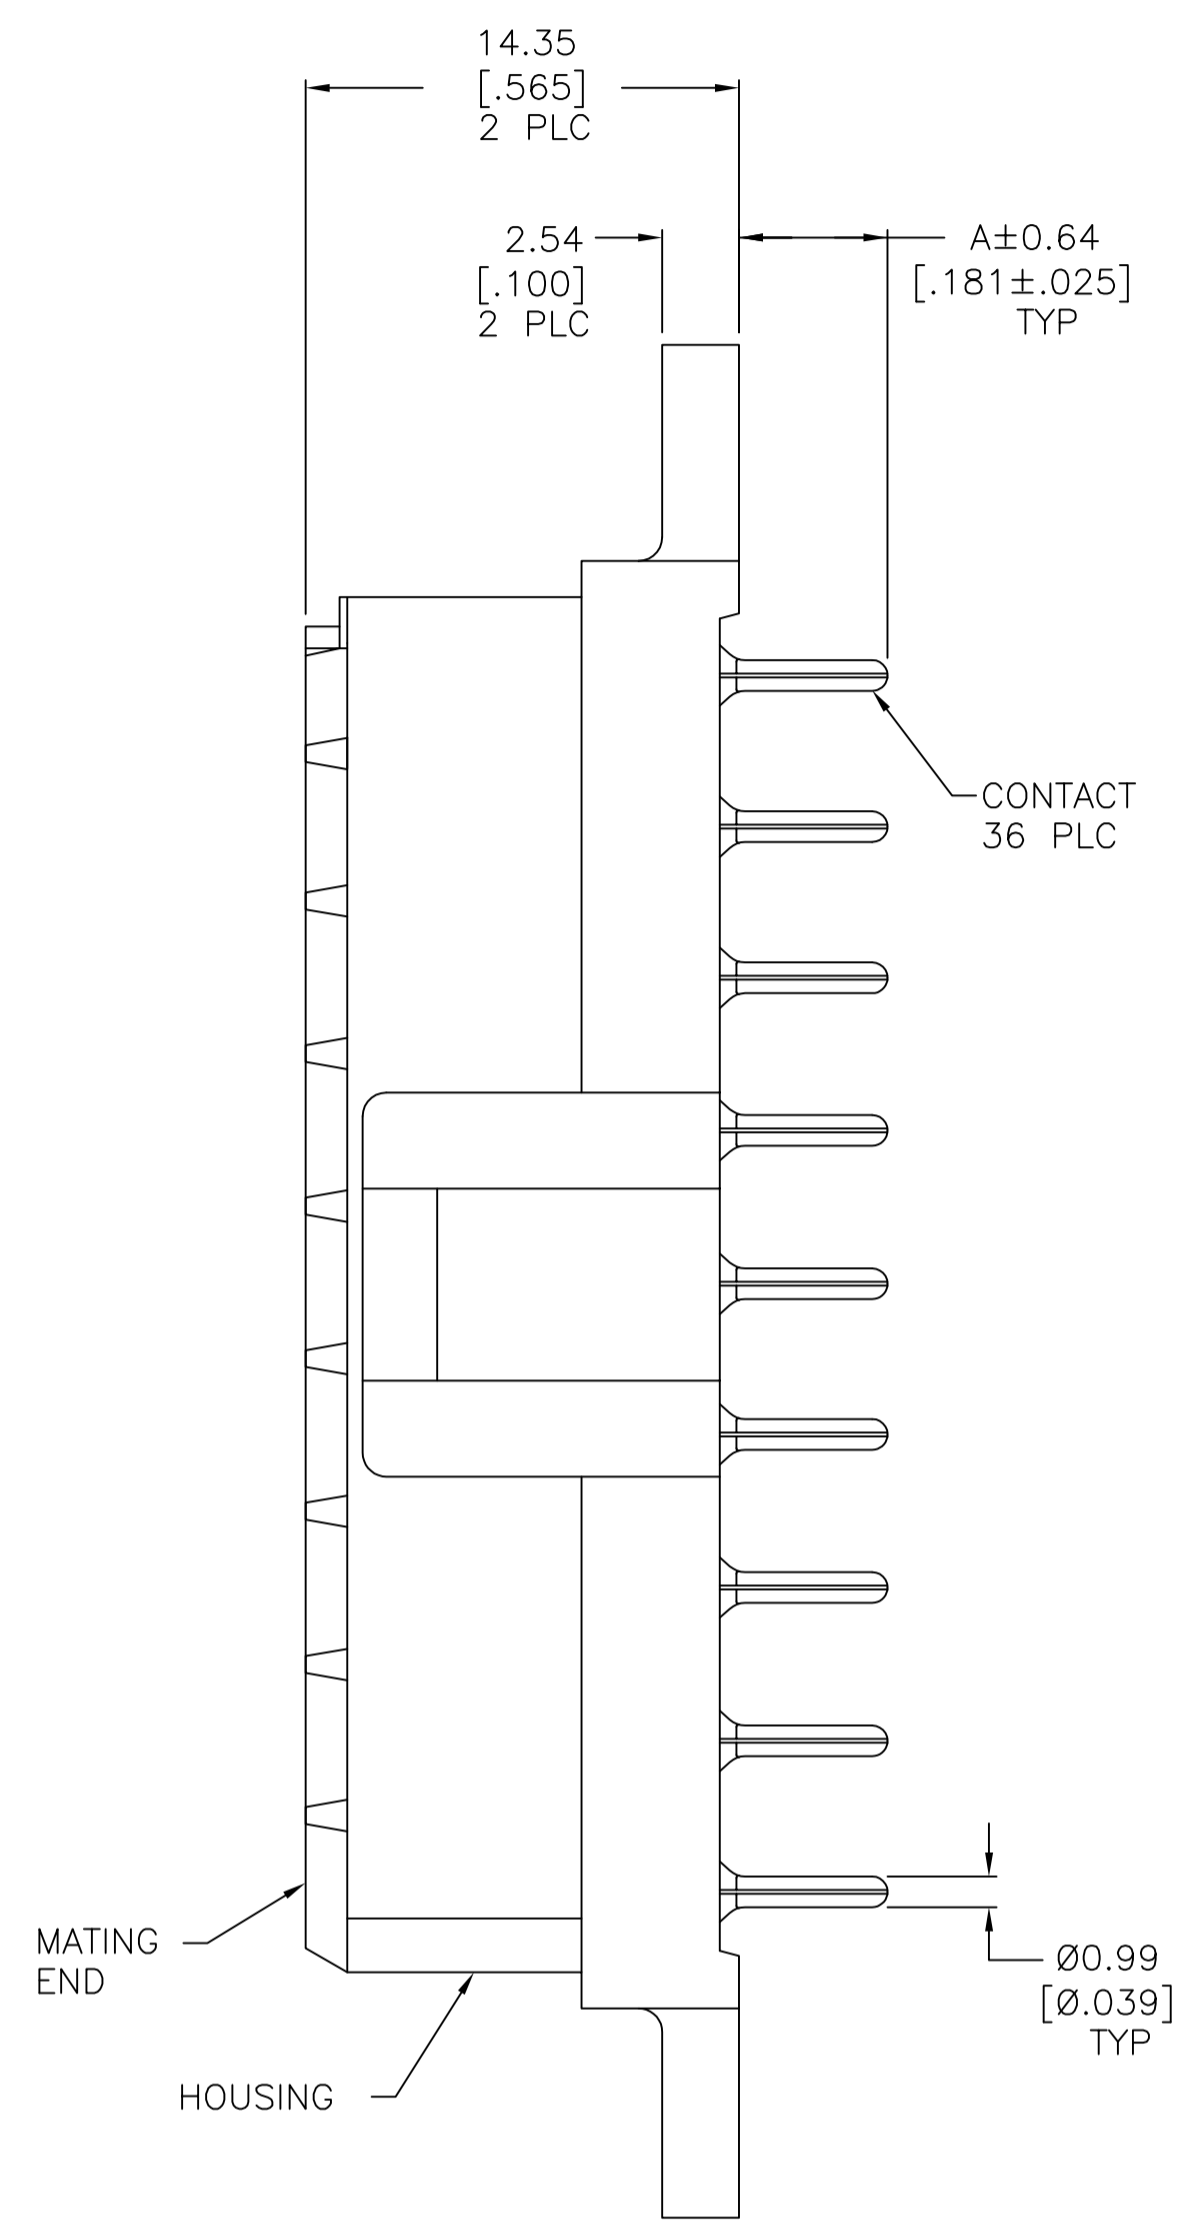


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
N	REVISED PER ECO-16-004940		06AUG2016	NK	MZ
P	REVISED PER ECO-17-011181		04AUG2017	RS	MZ

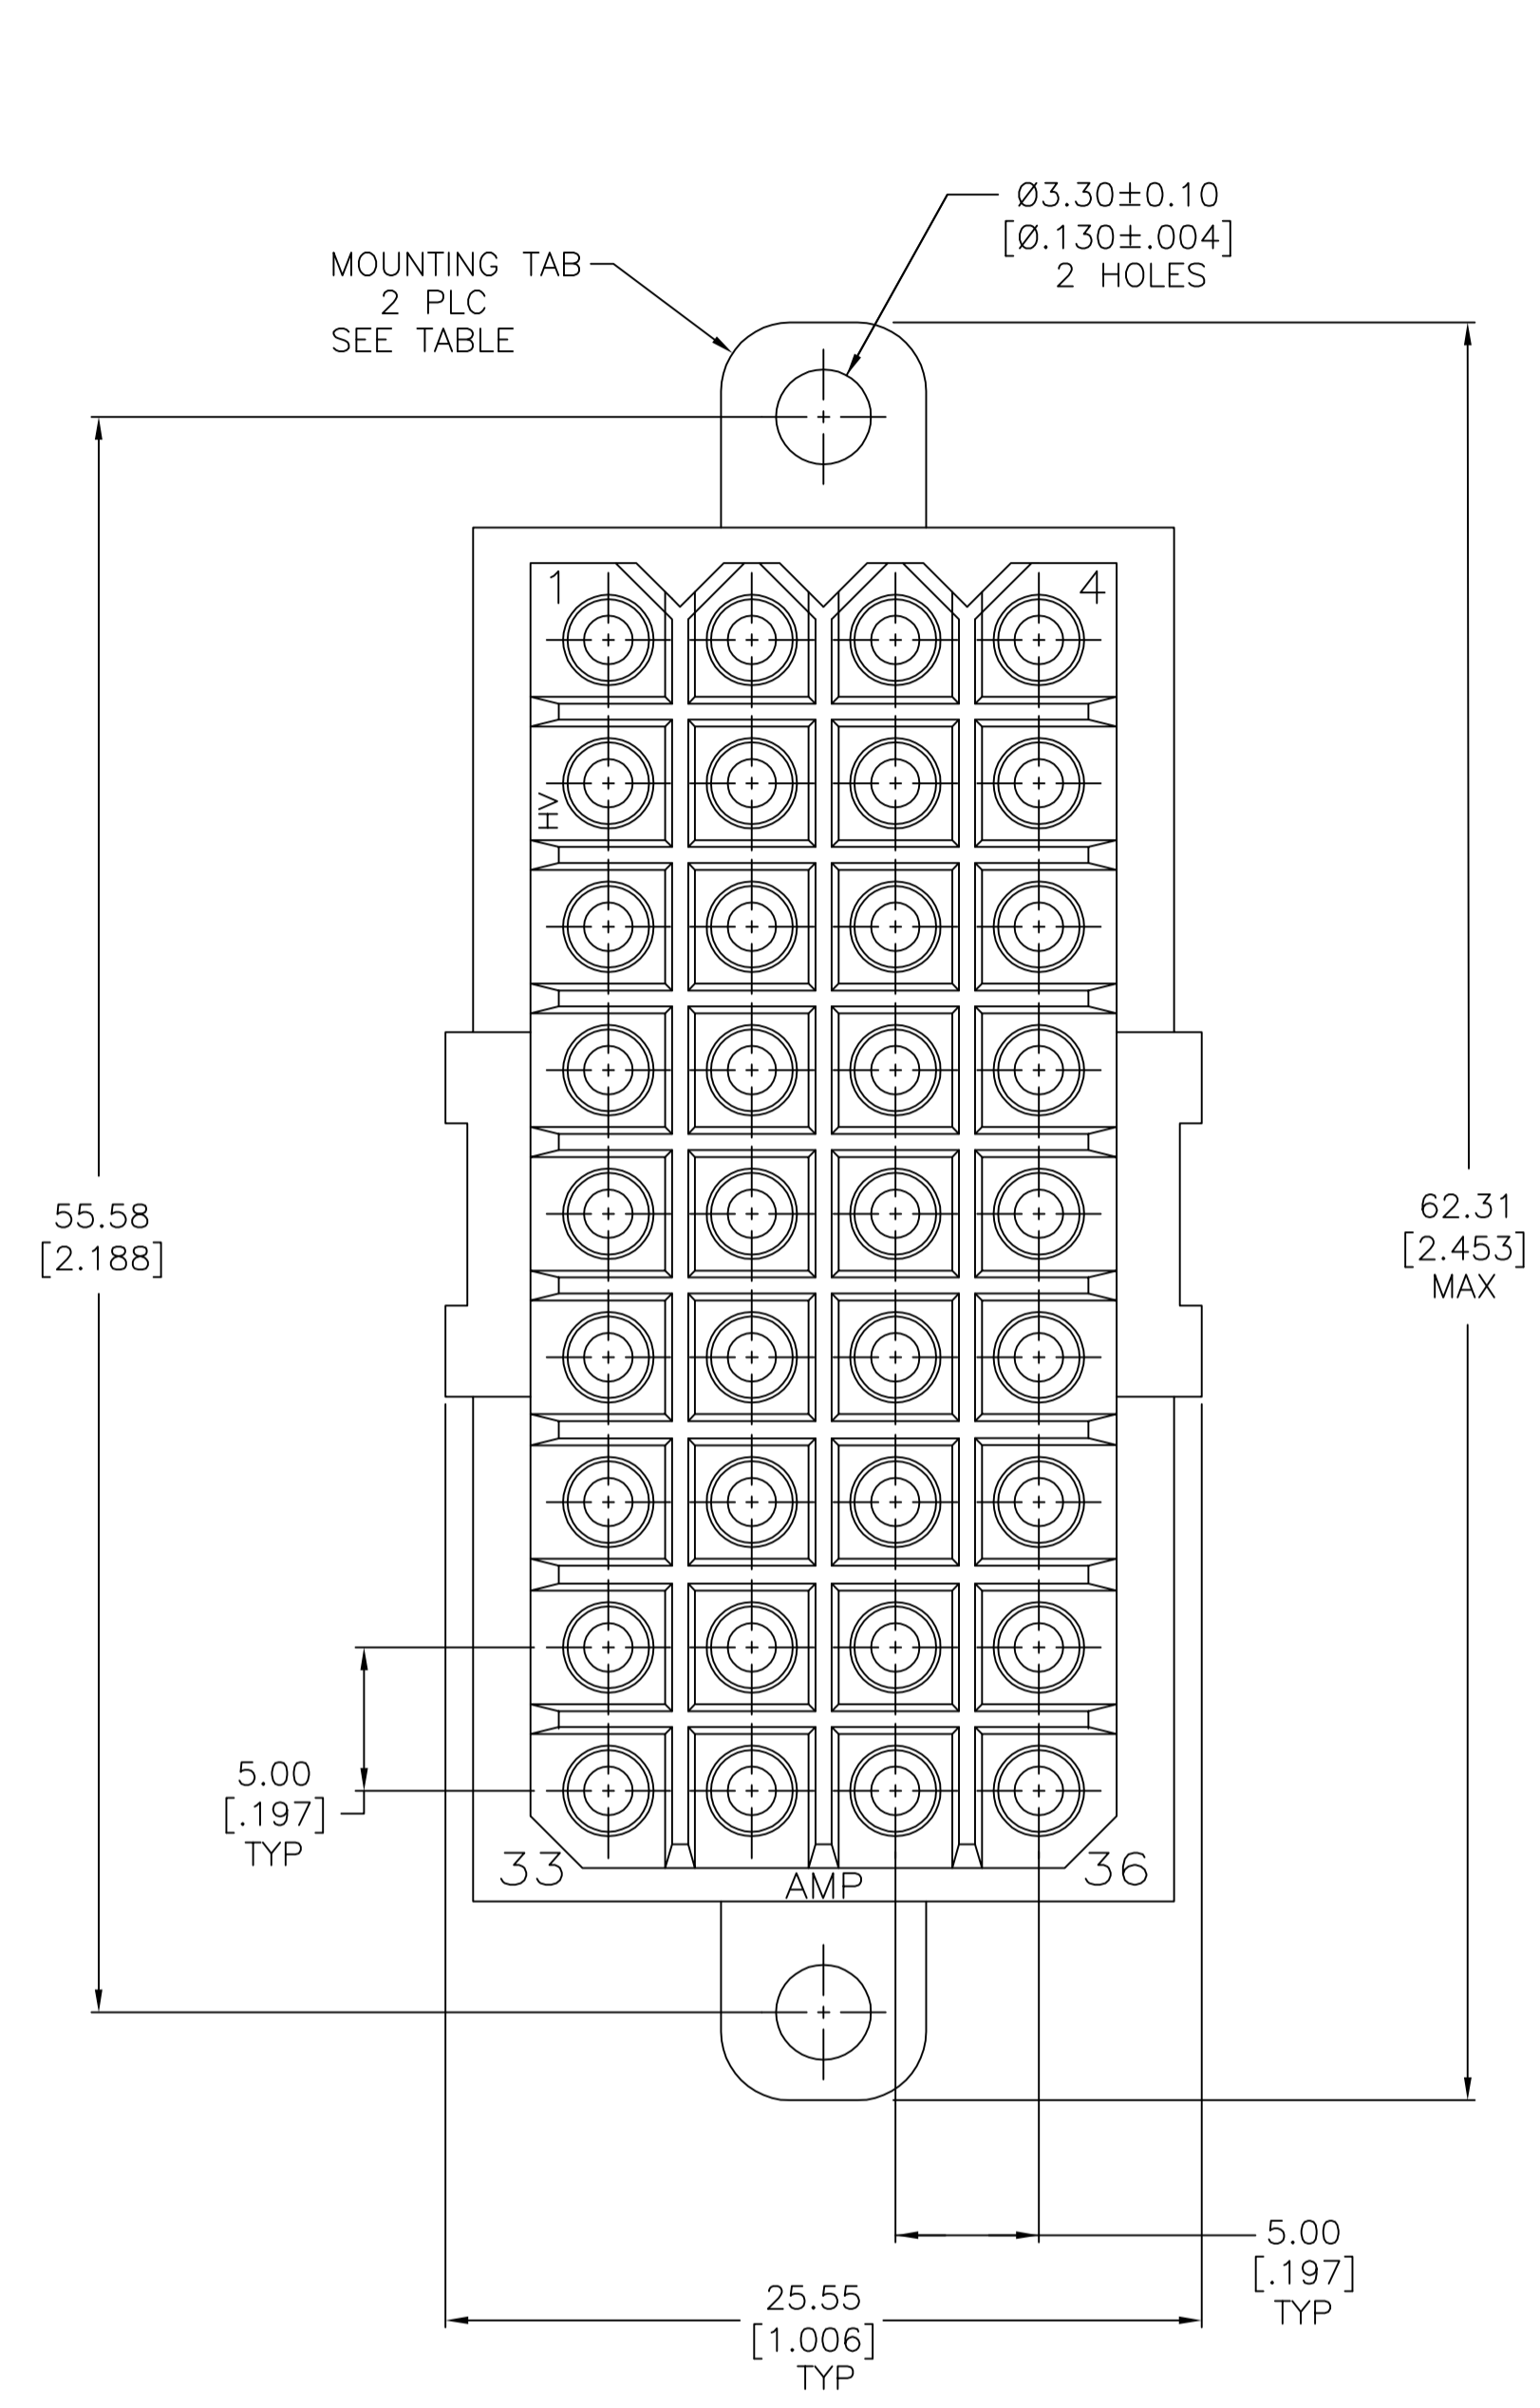

RECOMMENDED LAYOUT

- 1 NYLON, UL 94-V0 RATED, RED.
- 2 PHOSPHOR BRONZE.
- 3 3.81µm [.000150] MIN TIN-LEAD OVER 1.27µm [.0000050] MIN NICKEL.
- 4 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 5 .000150 MIN LEAD FREE TIN OVER .000050 MIN NICKEL.
- 6 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 7 PRILIMINARY PART NUMBER.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

REV	DESCRIPTION	DATE	DWN	APVD	
8	OBSOLETE	3.50 [.137]	6	YES	1-207534-2
8	OBSOLETE		6	NO	-1-207534-1
8	OBSOLETE		6	YES	1-207534-0
8	OBSOLETE	4.60 [.181]	5	NO	-207534-9
8	OBSOLETE		5	YES	207534-8
			4	NO	-207534-4
			4	YES	207534-3
			3	NO	-207534-2
			3	YES	207534-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN L.SIPE 03/20/92	CHK R.STONE 3-25-92	APVD A. TRAVIS 3-25-92	NAME
0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± 0.25 [.010]	4 PLC ± -	ANGLES ± -
MATERIAL HOUSING: 1	FINISH CONTACT: SEE TABLE	WEIGHT	SIZE A1	CAGE CODE 00779	DRAWING NO. ©=207534
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1	REV P

STE TE Connectivity
 SOCKET HEADER ASSEMBLY, 36 POSITION, METRIMATE
 108-10033

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207534-8](#)