



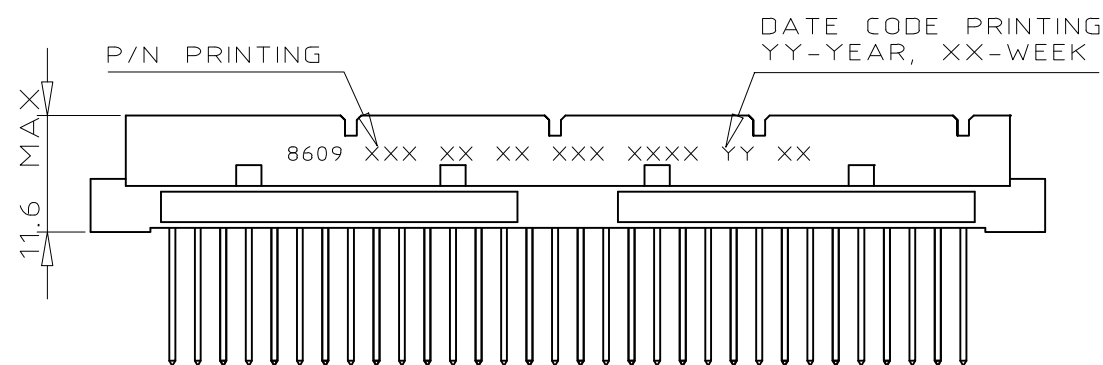


FCIconnect.com

Copyright FCI

DIMENSIONS

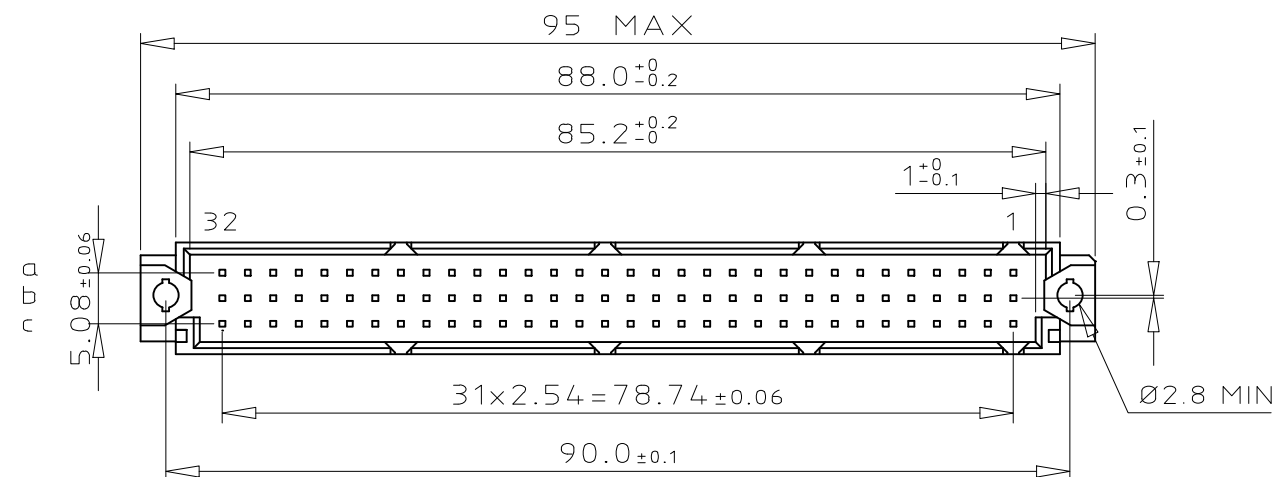


PCB LAYOUT

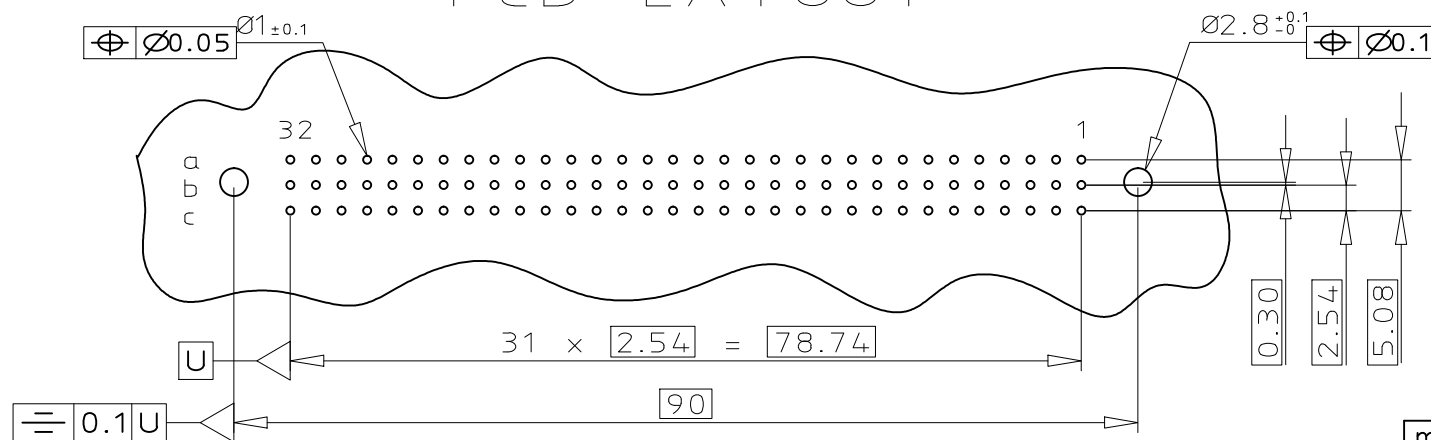

GENERAL CHARACTERISTICS & RoHS INFO


REFER DRAWING C-8609-0000A

TERMINATION

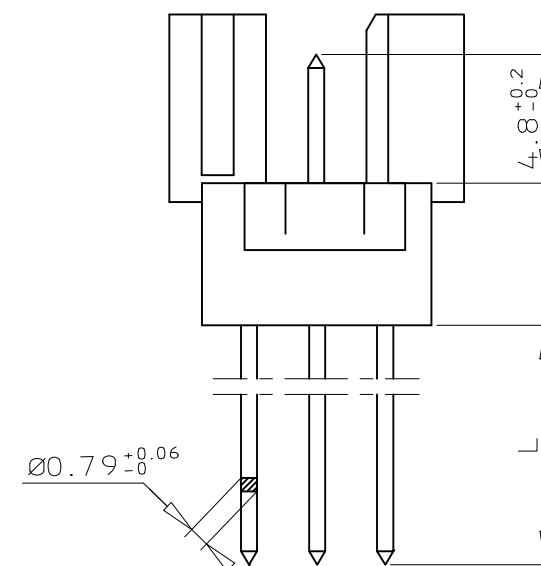

ORDERING INFORMATION

SERIES	8609	3	96	7	8	15	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	-	-	-	-	-	-	-	-	-	32
ROW a	b	c	-	-	-	-	-	-	-	96
ROW a	-	c	-	-	-	-	-	-	-	64
ROW a	-	c	-	-	-	-	-	-	-	32
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										7
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R										8
TERMINATION STYLE										
WIRE WRAP L=13.1 ±0.5										15
WIRE WRAP L=18.2 ±0.5										25
OPTIONS										
NO OPTION										7
PERFORMANCE CLASS										
DIN 41612 CLASS 3										4
DIN 41612 CLASS 2										5
DIN 41612 CLASS 1										6
AS PER MIL C 55302 / JSS 50808										8
PITCH PER ROW										
2.54 mm										5
5.08 mm										8
LEAD FREE VERSION										ELF

mat'l. code SEE DWG C-8609-0000A				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 8609			
ltr	ecn no	dr	date	tolerances unless		otherwise specified				title DIN REVERSE HEADER -			
A	104-0063	MINI	2004-09-17	angles linear			0.X	±0.1	scale 3:2 				
B	105-0089	MINI	2005-05-19				0.XX	±0.1					
C	105-0174	MINI	2005-09-27		0°±2°		0.XXX	±0.1					
D	106-0061	MINI	2006-05-31	dr	MINI K V		2004-09-17		dwg no		sheet 1 of 1		size
E	108-0146	KR	2008-10-21	enr	RAKHEE G		2004-09-17		C-8609-2005				A3
F	109-0200	KR	2009-09-22	chr	S ALOSIOUS		2010-12-04		type Product Customer Drawing				
G	110-0234	SAL	2010-12-04	appd	S ALOSIOUS		2010-12-04						
sheet index	revision sheet		G 1										

form: A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86093967815765ELF](#) [86094327814758ELF](#) [86094647815755ELF](#) [86094647815765ELF](#) [86093967815755ELF](#)
[86094327815748ELF](#)