



LOC	DIST	REVISIONS					
A	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	PLATING CHANGED TO PdNi+GOLD FLASH AT AREA "F"	02JUN2014	PS	JK

POS.	L±0.5	PART NO.
—	—	—
2	5.08	— 2
3	7.62	— 3
4	10.16	966 575 -4
5	12.70	966 575 -5
6	15.24	— 6
7	17.78	966 575 -7
8	20.32	966 575 -8
9	22.86	— 9
10	25.40	1- 966 575 -0
11	27.94	1- 966 575 -1
12	30.48	1- 966 575 -2
13	33.02	1- 966 575 -3
14	35.56	— 4
15	38.10	1- 966 575 -5
16	40.64	1- 966 575 -6
17	43.18	1- 966 575 -7
18	45.72	1- 966 575 -8
19	48.26	1- 966 575 -9
20	50.80	2- 966 575 -0
21	53.34	— 1
22	55.88	— 2
23	58.42	— 3
24	60.96	— 4
25	63.50	— 5
26	66.04	— 6
27	68.58	— 7
28	71.12	— 8
29	73.66	— 9
30	76.20	— 0
31	78.74	— 1
32	81.28	— 2
33	83.82	— 3
34	86.36	— 4
35	88.90	— 5
36	91.44	— 6
37	93.98	— 7
38	96.52	— 8
39	99.06	— 9
40	101.60	— 0
41	104.14	— 1
42	106.68	— 2
43	109.22	— 3
44	111.76	— 4
45	114.30	— 5
46	116.84	— 6
47	119.38	— 7
48	121.92	— 8
49	124.46	— 9
50	127.00	— 0

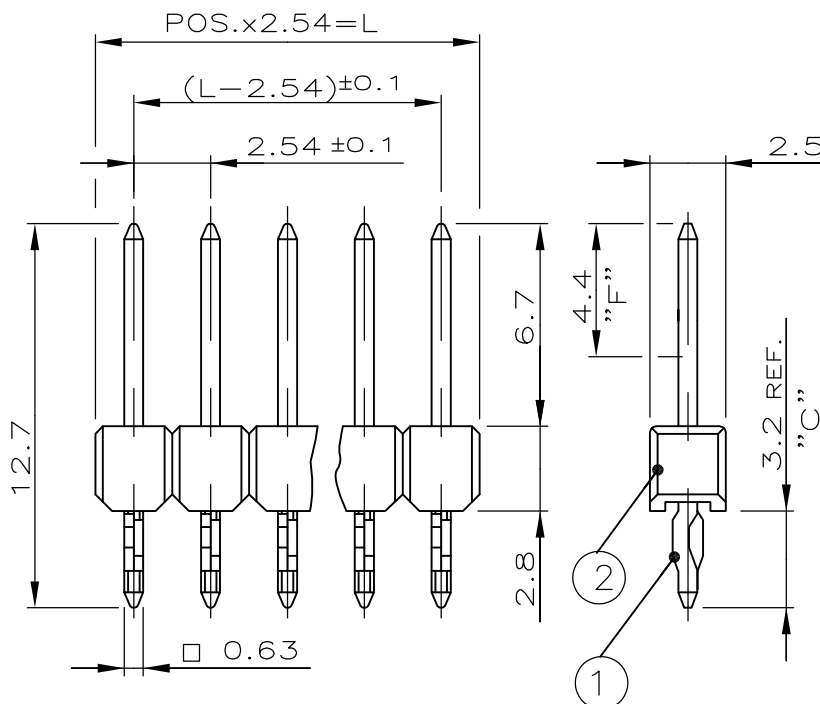

LOCHBILD DER LEITERPLATE (SICHT AUF LÖTSEITE)
M2.5:1

$$49 \times 2.54 = 124.46$$



50x



OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER
D.RENAUD/D.SINISI



GEBOHRTES LOCH 1.0 ±0.025 mm

Cu DICKE 25–50µm

Sn DICKE min. 4µm

FERTIGE BOHRUNG 0.9 ±0.07mm



MIN 0.7µm PdNi + MIN 0.1µm GOLD FLASH IN ZONE "F"
MIN 2.5µm TIN OVER 1.27µm NICKEL IN ZONE "C"


ITEM NO.	PART DESCRIPTION	MATERIAL	FINISH
1	CONTACT PIN	CuSn	△1
2	HOUSING	PBT	GREEN

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
± 0.2mm

0 PLC	± —
1 PLC	± —
2 PLC	± —
3 PLC	± —
4 PLC	± —
ANGLES	± —



DWN A.HO 01.06.94

CHK M.SCHAARSCHMIDT 01.06.94

APVD —

PRODUCT SPEC
108-18012

APPLICATION SPEC
—

WEIGHT —

CUSTOMER DRAWING

MATERIAL SEE TABLE

FINISH SEE TABLE



TE Connectivity

NAME
AMPMODU II ACTION PIN HEADER
SINGLE ROW

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	00779	C-966575	—

SCALE 4:1 SHEET 1 OF 1 REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[966575-5](#)