

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
K		REVISED PER ECO-15-015252	13NOV15	BJ	FY

D

C

B





A

D

C

B

A

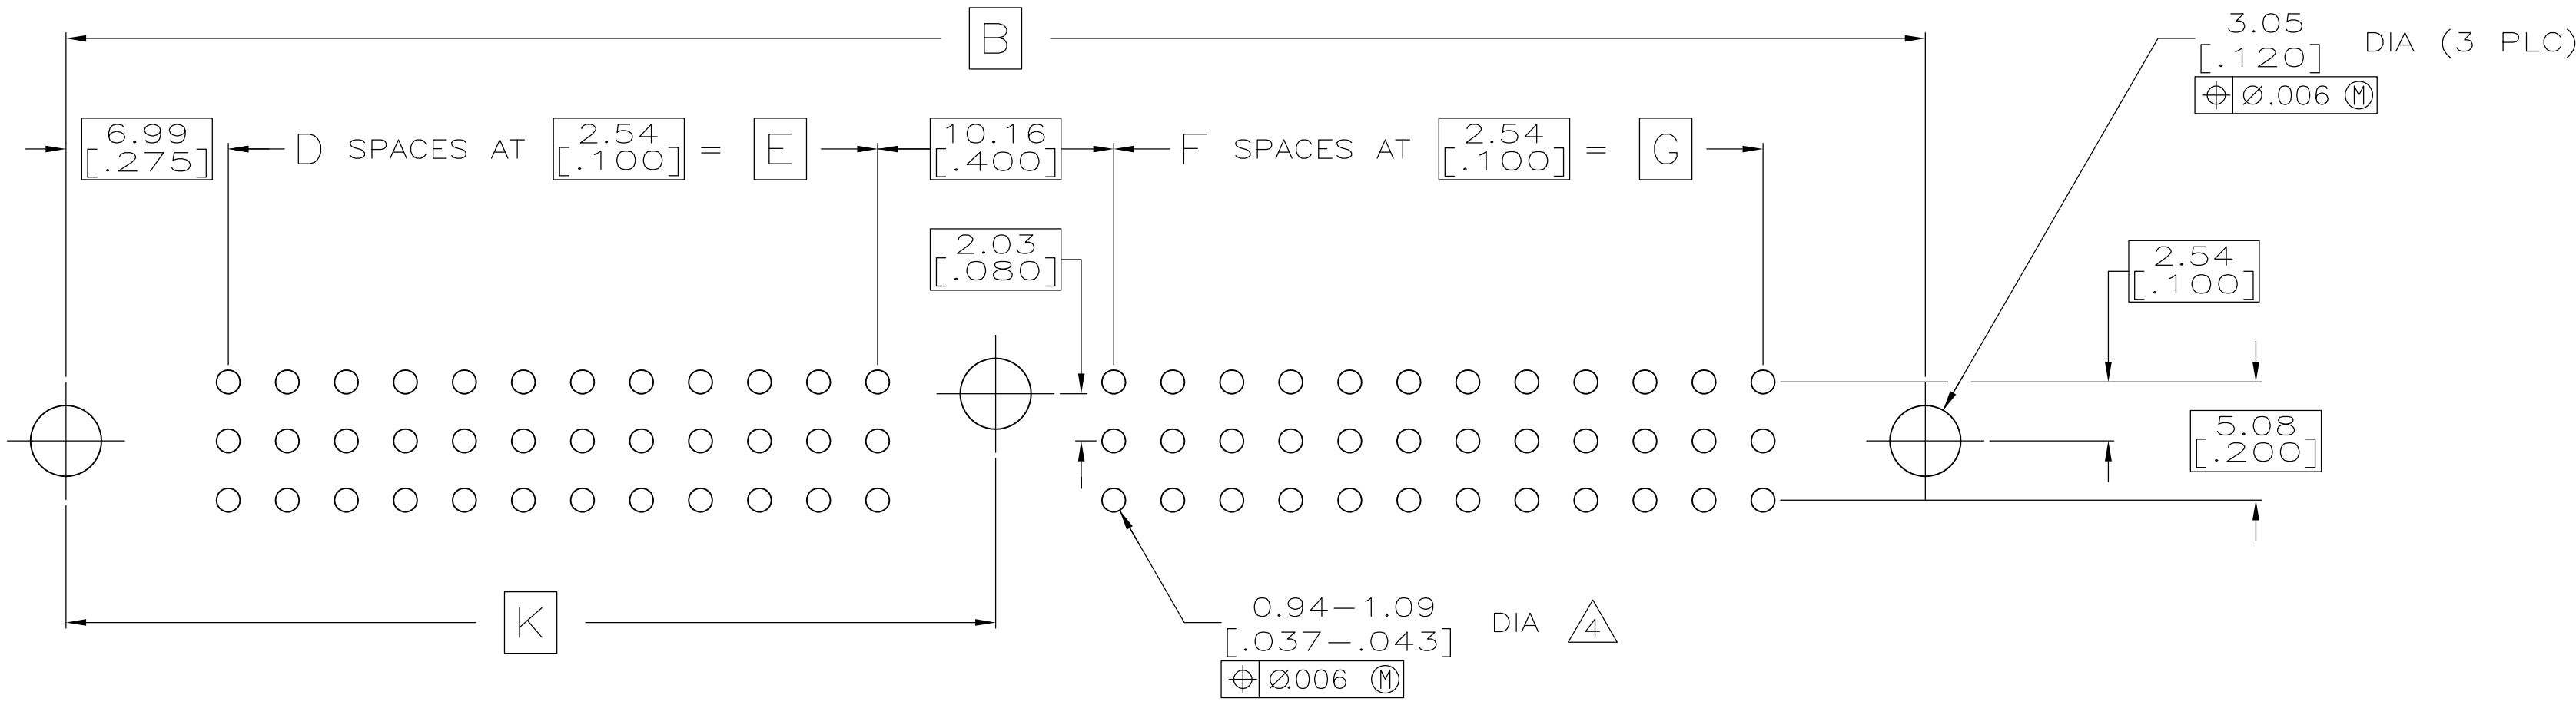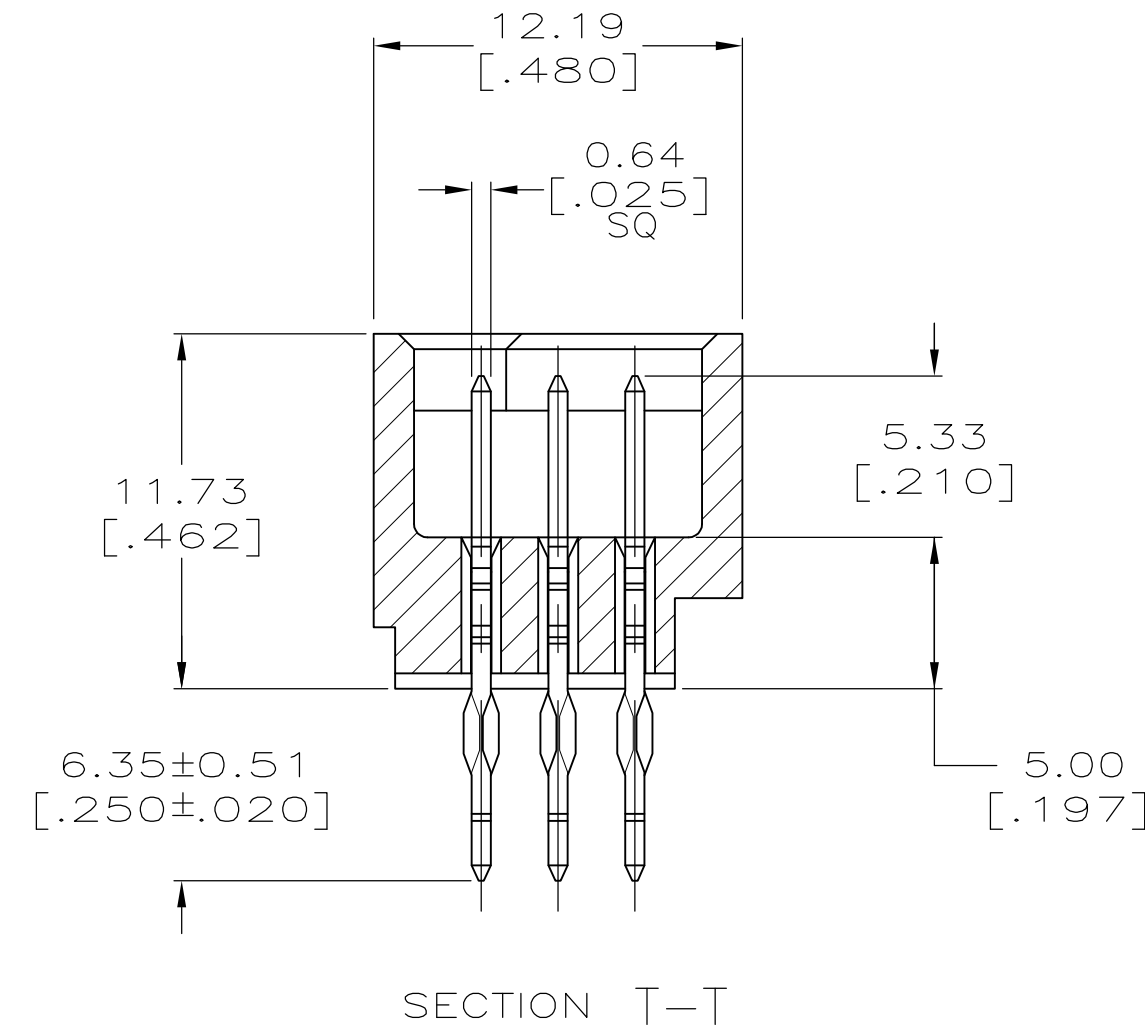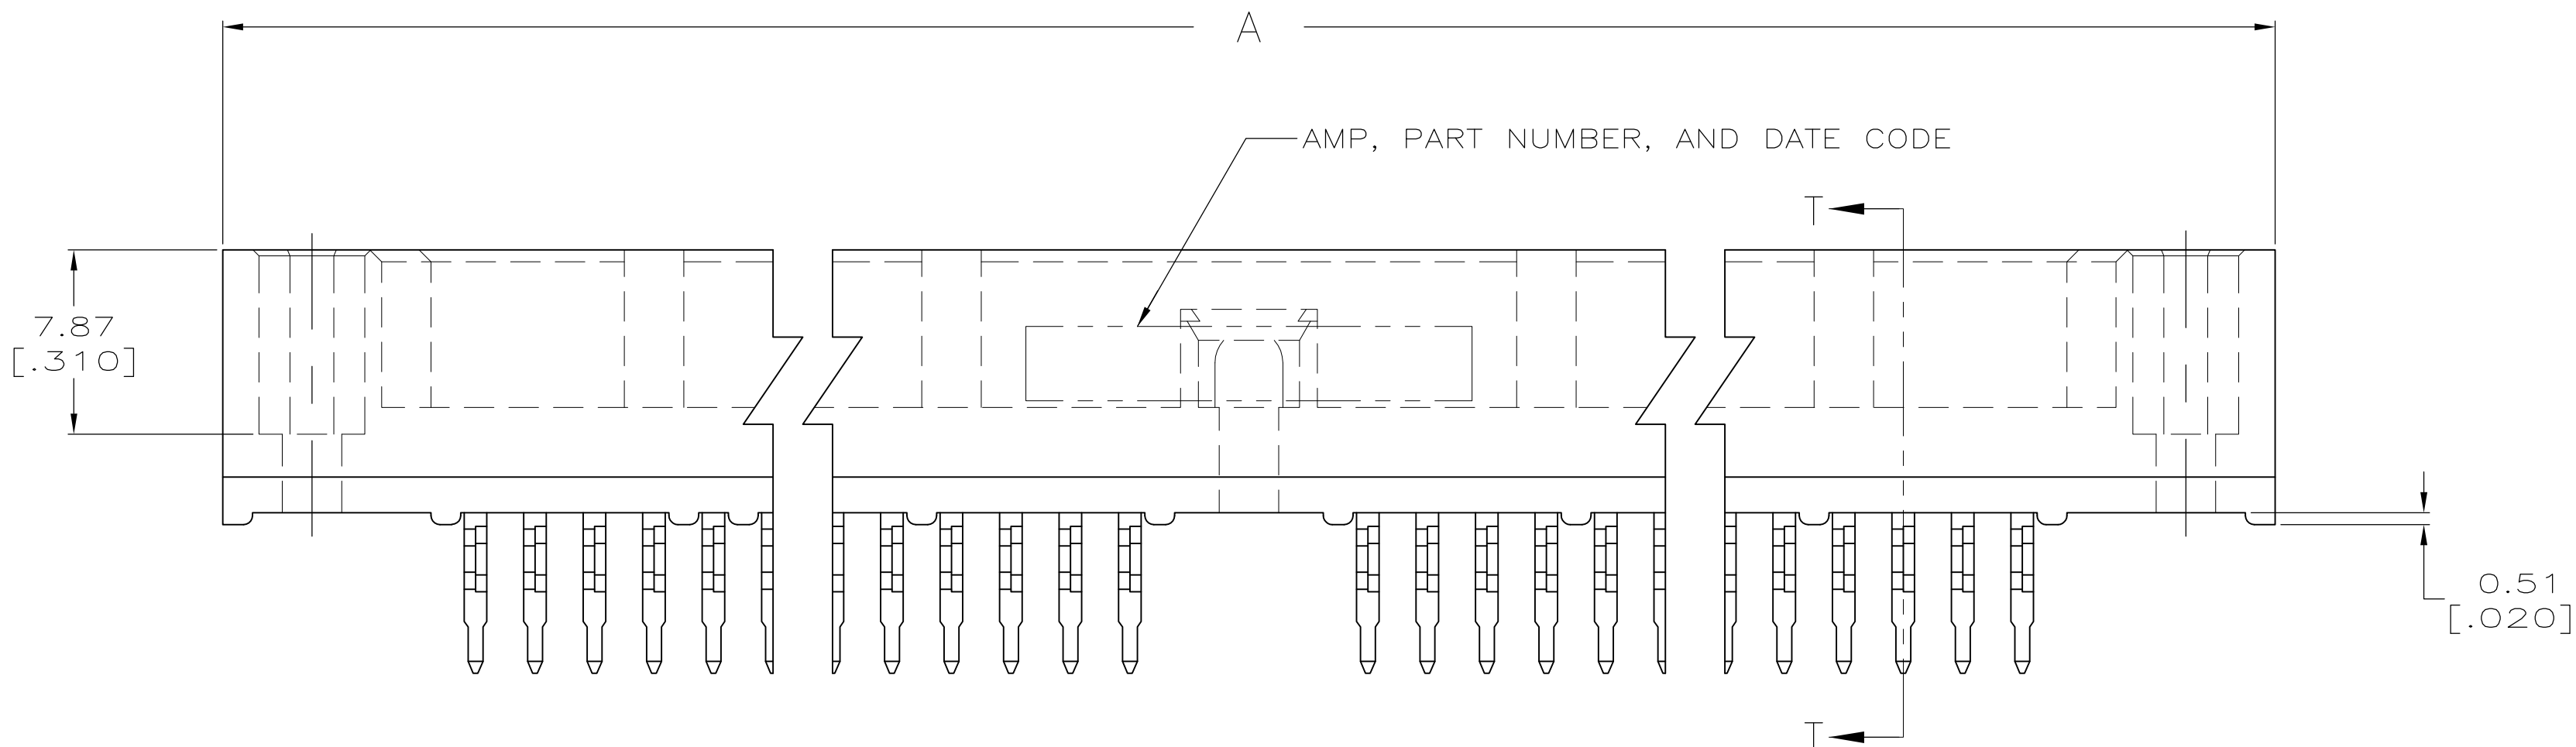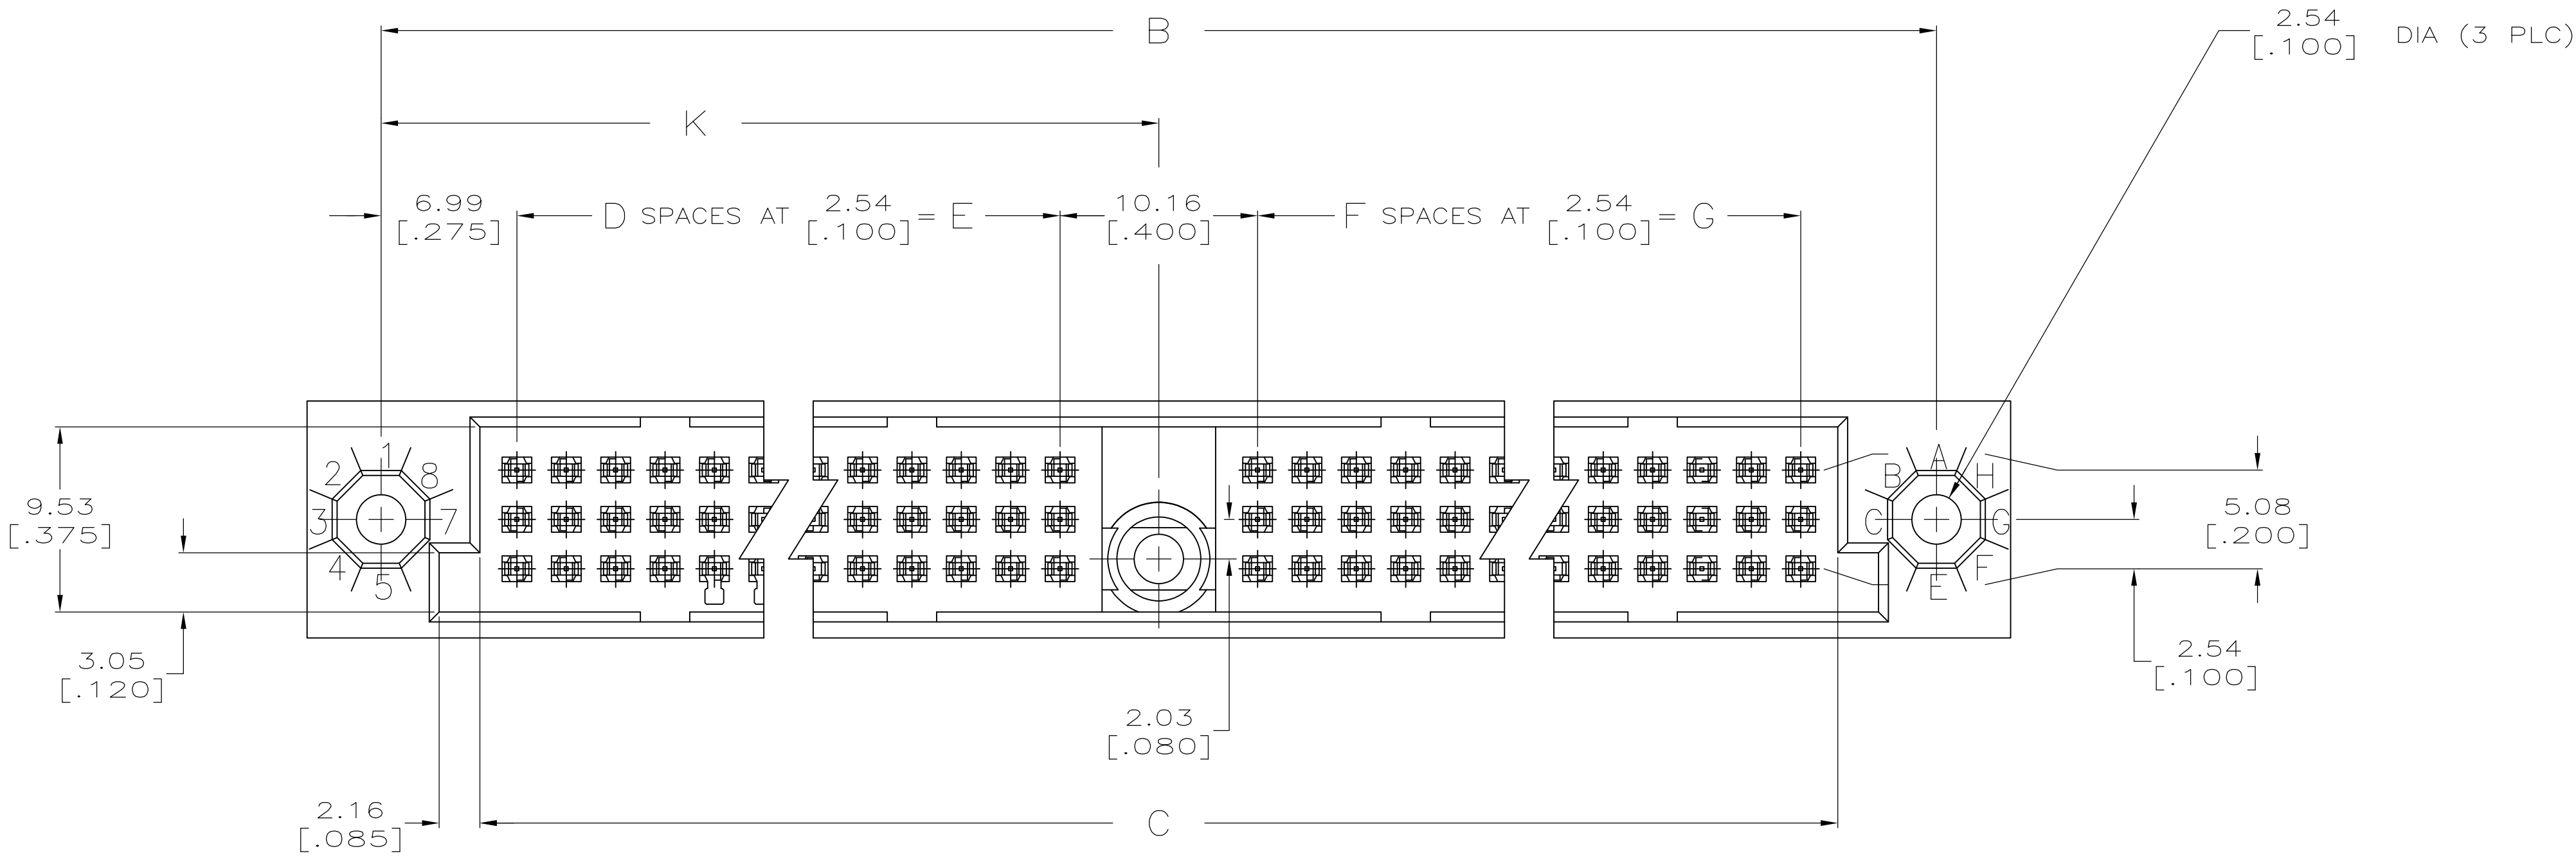

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. K. SEIFRIED CHK F. KIBLER APVD -	04/11/90 8-11-92 -	TE Connectivity	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME	HDI, 3 ROW, PIN ASSEMBLY, ONE CENTER GUIDE PIN, 6.35[.250] LONG ACTION PINS	
0 PLC ± -	1 PLC ± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
2 PLC ± -	3 PLC ± 0.13 [.005]	WEIGHT	0	A1	00779
4 PLC ± -	ANGLES ± -	CUSTOMER DRAWING	SCALE	4:1	SHEET 1 OF 2
MATERIAL	FINISH	REV	K		

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

By

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR—NATURAL.

2

CONTACT MATERIAL: PHOSPHOR BRONZE.

3

FINISH:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108—9063; BASED ON TELCORDIA DR—1217—CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
SOLDER TAILS AREA: TIN—LEAD PLATED.

4

ACTION PIN POSTS REQUIRE 2.36 [.093] MIN THICK P.C. BOARD. RECOMMENDED P.C. BOARD HOLES ARE 1.151 [.0453] DIA PLATED THRU WITH 0.025—0.076 [.001—.003] COPPER, WITH 0.0076 [.0003] MIN TIN—LEAD PLATING; FINISHED HOLE AFTER PLATING 0.94—1.09 [.037—043] DIA.

5

PART NUMBER IS OBSOLETE.

6

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6

OBSOLETE

164.46 [6.475]	152.40 [6.000]	—60—	152.40 [6.000]	—60—	318.77 [12.550]	328.93 [12.950]	336.55 [13.250]	—366—	533294—8
156.84 [6.175]	144.78 [5.700]	—57—	144.78 [5.700]	—57—	303.53 [11.950]	313.69 [12.350]	321.31 [12.650]	—348—	533294—7
149.22 [5.875]	137.16 [5.400]	54	137.16 [5.400]	54	288.29 [11.350]	298.45 [11.750]	306.07 [12.050]	330	533294—6
141.60 [5.575]	129.54 [5.100]	51	129.54 [5.100]	51	273.05 [10.750]	283.21 [11.150]	290.83 [11.450]	312	—533294—5—
133.98 [5.275]	121.92 [4.800]	—48—	121.92 [4.800]	—48—	257.81 [10.150]	267.97 [10.550]	275.59 [10.850]	—294—	533294—4
126.36 [4.975]	114.30 [4.500]	—45—	114.30 [4.500]	—45—	242.57 [9.550]	252.73 [9.950]	260.35 [10.250]	—276—	533294—3
118.74 [4.675]	106.68 [4.200]	—42—	106.68 [4.200]	—42—	227.33 [8.950]	237.49 [9.350]	245.11 [9.650]	—258—	533294—2
111.12 [4.375]	99.06 [3.900]	39	99.06 [3.900]	39	212.09 [8.350]	222.25 [8.750]	229.87 [9.050]	240	533294—1
K	G	F	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC

± —
± —
± —
± 0.13 [.005]
± — ± —

ANGLES

FINISH

MATERIAL

12

3

DWN
R. K. SEIFRIED
CHK
F. KIBLER
APVD
—

04/11/90
8—11—92
—
—
—

PRODUCT SPEC
—
APPLICATION SPEC
—
WEIGHT
0

NAME
HDI, 3 ROW, PIN ASSEMBLY,
ONE CENTER GUIDE PIN, 6.35[.250]
LONG ACTION PINS
SIZE
A1

CAGE CODE
00779

DRAWING NO
533294

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
4:1

SHEET
2

OF
2

REV
K

TE Connectivity

TE

4805 (1/15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[533294-1](#)