


4

3

2

1

LOC	DIST	REVISIONS				
CE	16	P	LTR	DESCRIPTION	DATE	APVD
			B	REVISED PER ECR-08-003988	05MAR08	JWD JD

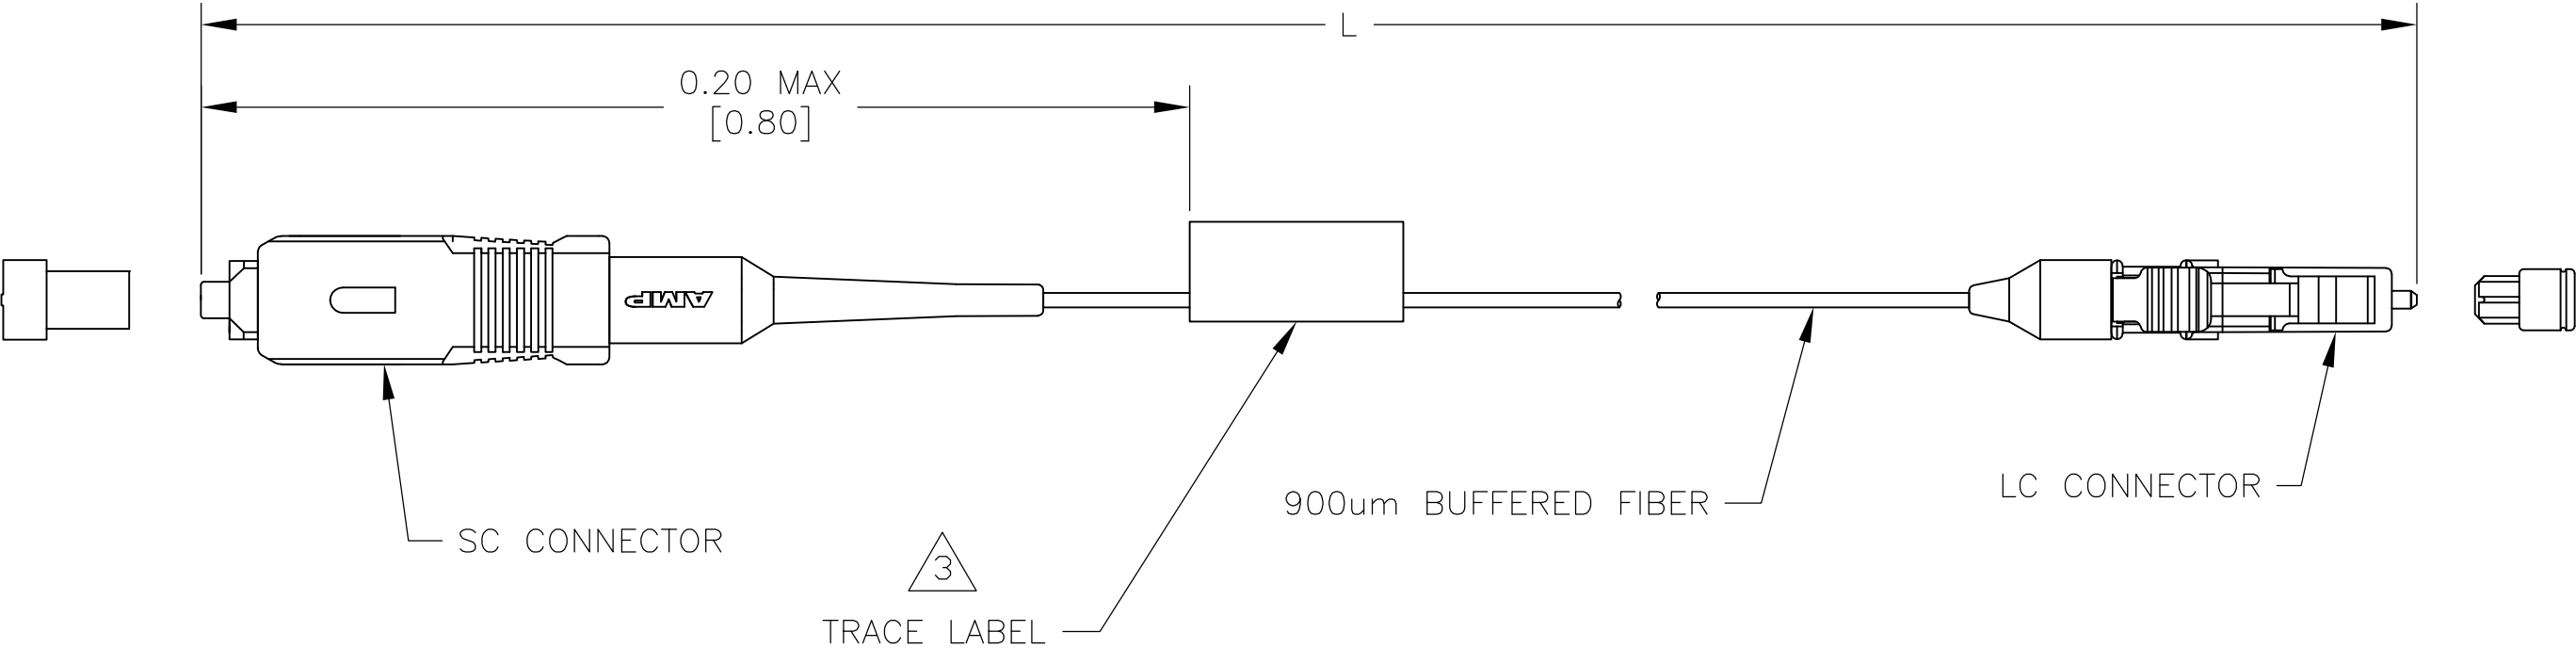


1. MAX INSERTION LOSS:
0.5 dB SC
0.2 dB LC
2. 55 dB MIN RETURN LOSS

3 TRACE LABEL IS PLACED ON IT'S UNIT PACKAGE FOR ASSEMBLIES LESS THAN 1 METER LONG.

4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF THE TYCO ELECTRONICS STANDARD 230-702

15.00±0.15 [591.0±6.0]	1-6374610-5
10.00±0.15 [393.7±6.0]	1-6374610-0
0.304+0.050/-0.0 [12.0+2.0/-0.0]	6374610-7
0.64±0.03 [25.3±1.2]	6374610-6
5.00±0.08 [196.9±3.0]	6374610-5
4.00±0.08 [157.5±3.0]	6374610-4
3.00±0.05 [118.1±2.0]	6374610-3
2.00±0.05 [78.7±2.0]	6374610-2
1.00±0.05 [39.4±2.0]	6374610-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU	03 FEB 06	 Tyco Electronics Corporation Harrisburg Pa, 17105-3608	
		CHK J.DUNCAN	03 FEB 06		
DIMENSIONS: METERS [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.DUNCAN	03 FEB 06	NAME CABLE ASSY, FIBER OPTIC SINGLEMODE BUFFERED FIBER, AMP SC (NG), TO LC —	
		PRODUCT SPEC —			
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —	APPLICATION SPEC —		SIZE	
		—		CAGE CODE	DRAWING NO
MATERIAL —	FINISH —	WEIGHT —		A3	00779
CUSTOMER DRAWING				RESTRICTED TO —	
				SCALE NTS	
				SHEET 1	OF 1
				REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6374610-0](#)