



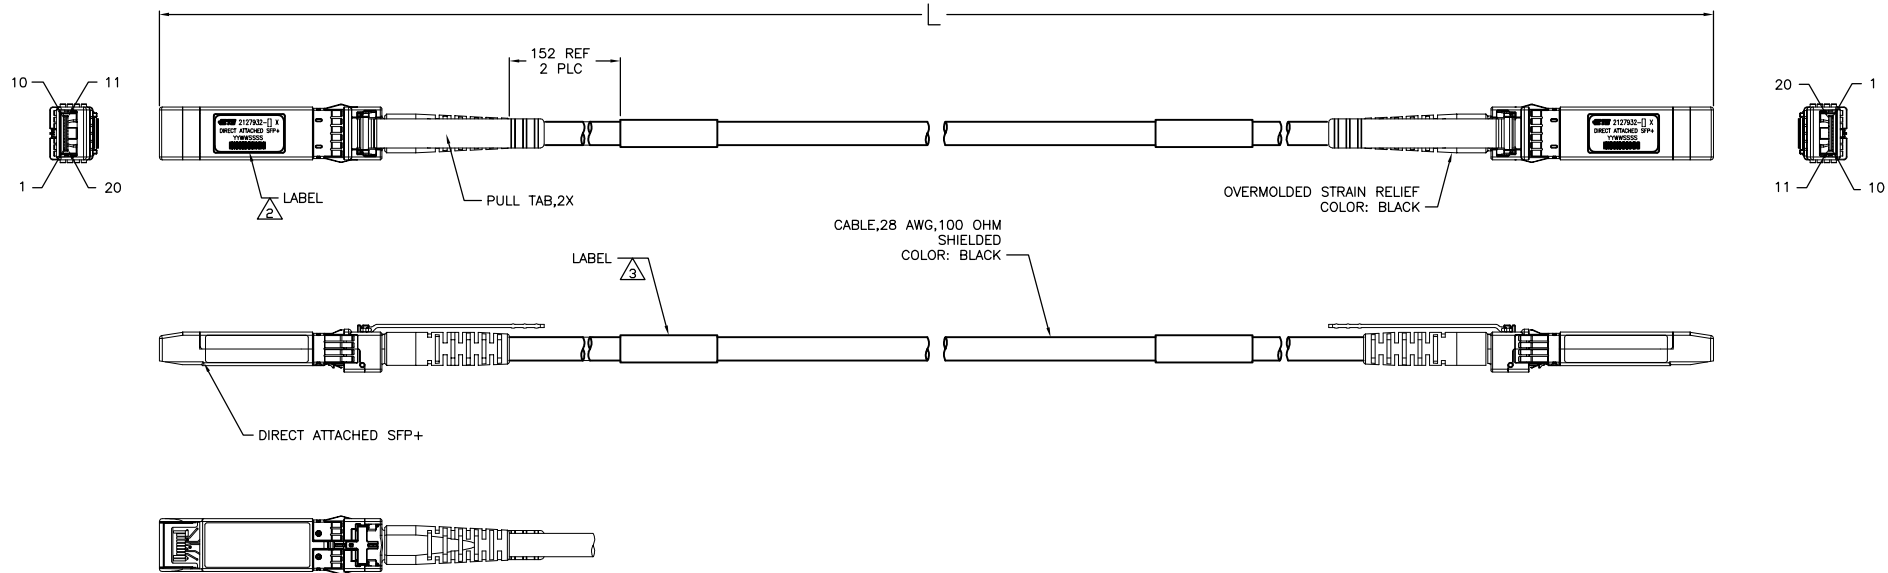


1. CHARACTERISTIC IMPEDANCE: 100±10 OHMS
(MEASURED DIFFERENTIALLY).

△2 LABEL INFORMATION:





△3 LABEL INFORMATION:



4. SEE SHEET 2 FOR WIRING SCHEMATIC.
5. ROHS COMPLIANCE: PRODUCT AND PROCESSING MEETS REQUIREMENTS OF
TE SPECIFICATION TEC-138-702.

5 +0.1 - 0 METERS	2127932-6
4 +0.08 - 0 METERS	2127932-5
3 +0.08 - 0 METERS	2127932-4
2 +0.08 - 0 METERS	2127932-3
1 +0.05 - 0 METERS	2127932-2
0.5 +0.05 - 0 METERS	2127932-1
L	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 18MM2010 CHK. T. SMITH C. ADAMS APPROVED C. ADAMS 18MM2010		NAME TE Connectivity	
DIMENSIONS: mm 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC mm		CUSTOMER LABELING DIMENSIONS SPECIFIED: PRODUCT SPEC APPLICATION SPEC WEIGHT MATERIAL FINISH		CABLE ASSY, 28 AWG, SFP+ TO SFP+ NL_PLATED SIZE: 100779 CAGE CODE: 2127932 SCALE: 1:1 SHEET: 1 of 2 REV: C	
CUSTOMER DRAWING					

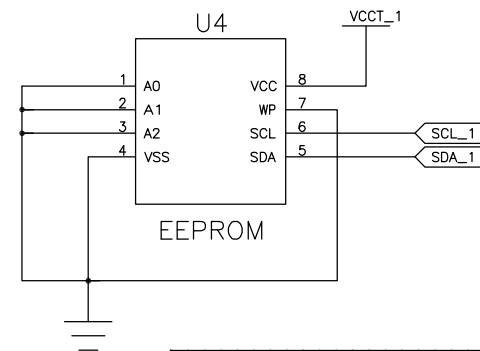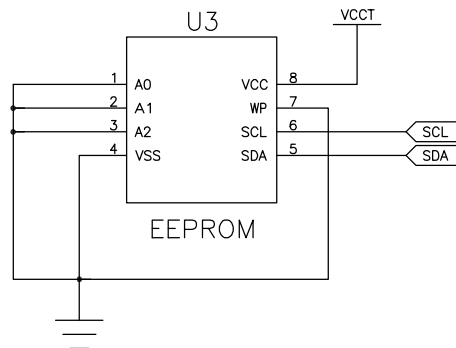

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2127932-5](#)