


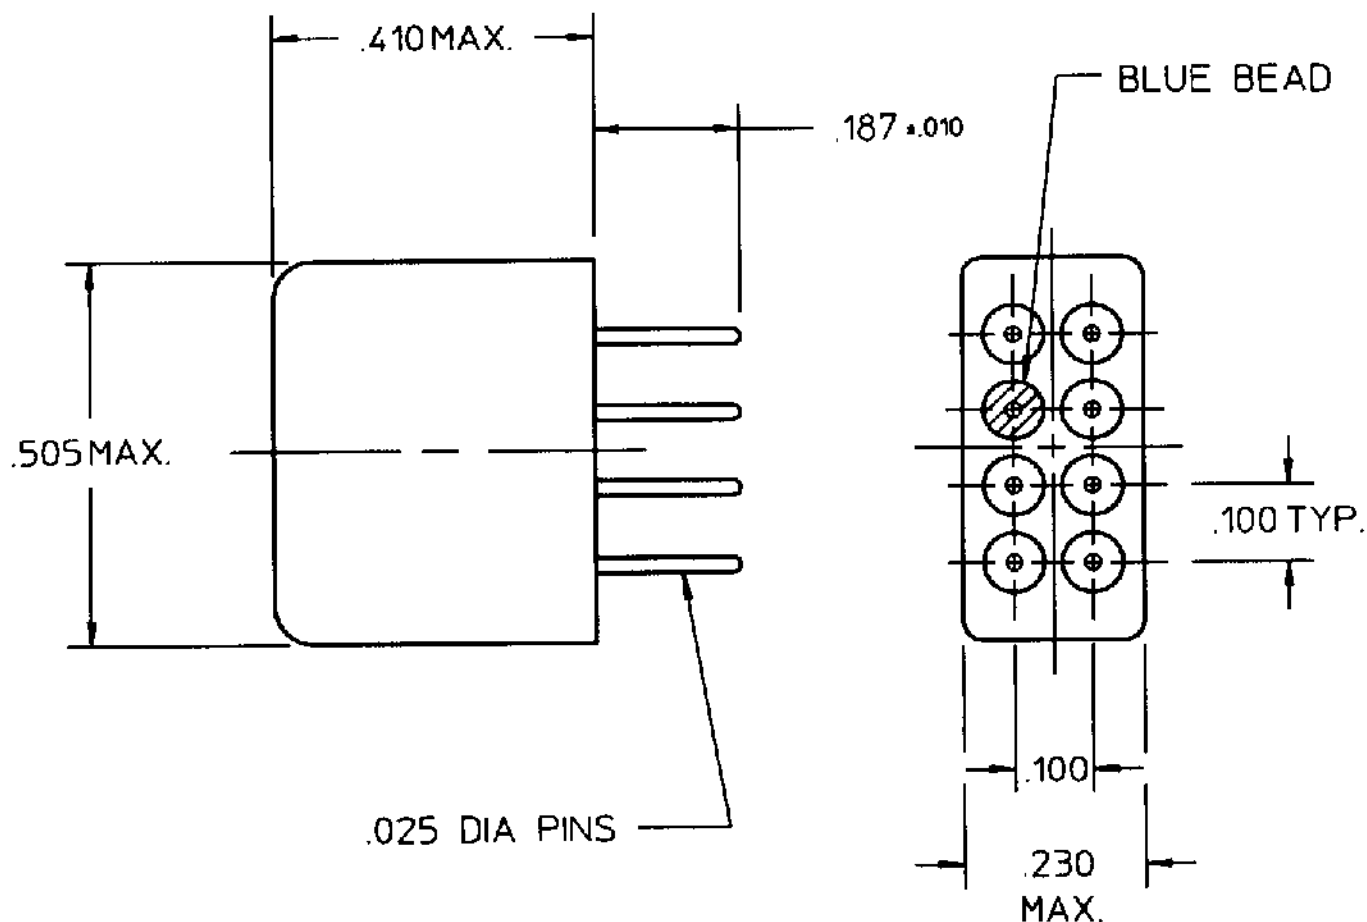

COIL:


RESISTANCE	1500 OHMS $\pm$ 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6 $\pm$ 1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE TIME 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

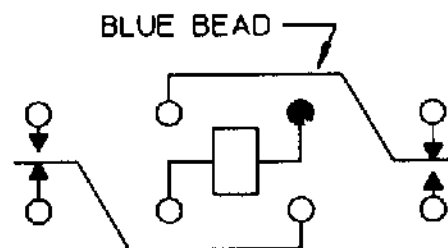

CONTACT RATING: LOW LEVEL TO
1 AMP 28 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 1/21/93

CK. V22/23/93

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. C. I. I. STD.
CUST. NO.

TYPE "MFW" RELAY

MFW1201N00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[MFW1201N00](#)