


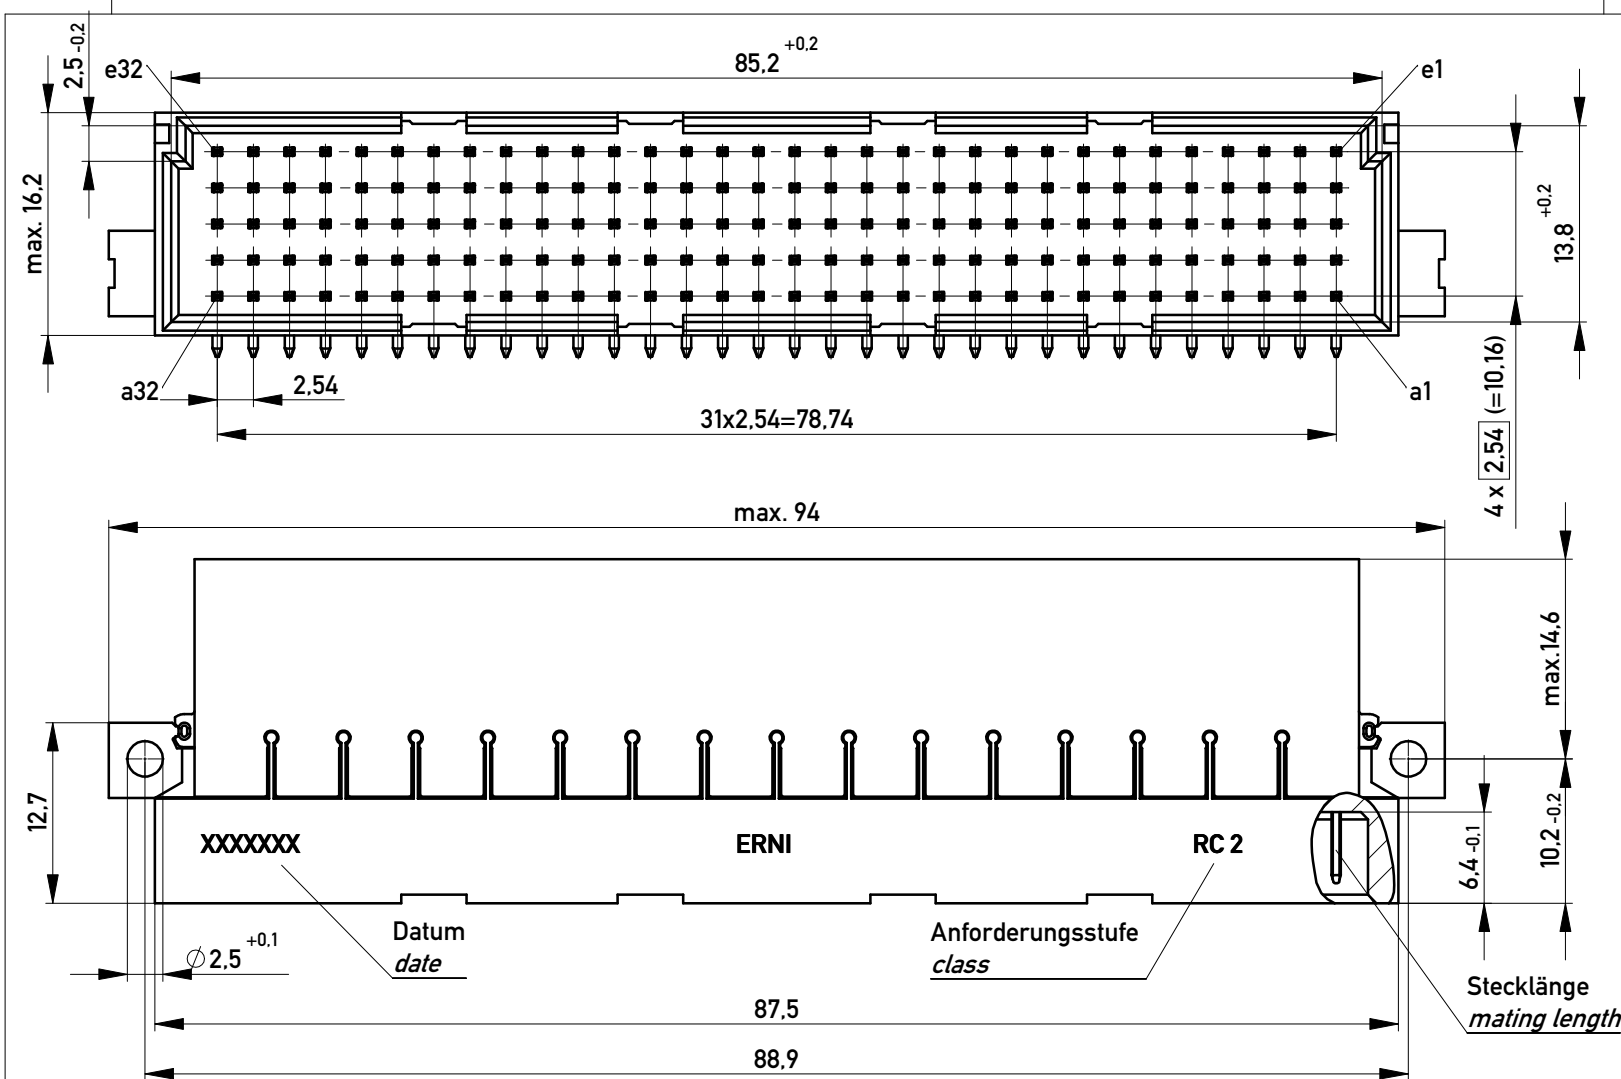


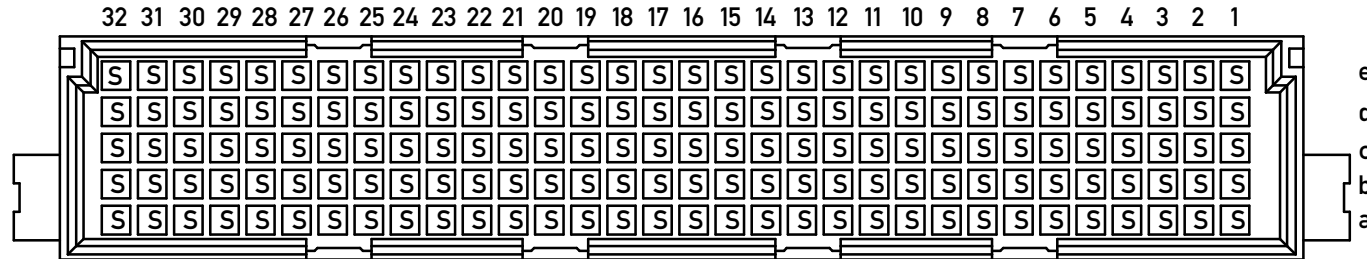


Bestückungsplan / contact layout

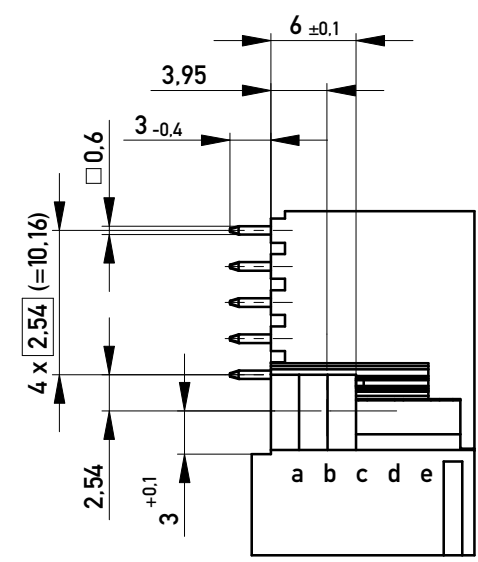


Leiterplatten-Lochbild / PCB drillhole pattern

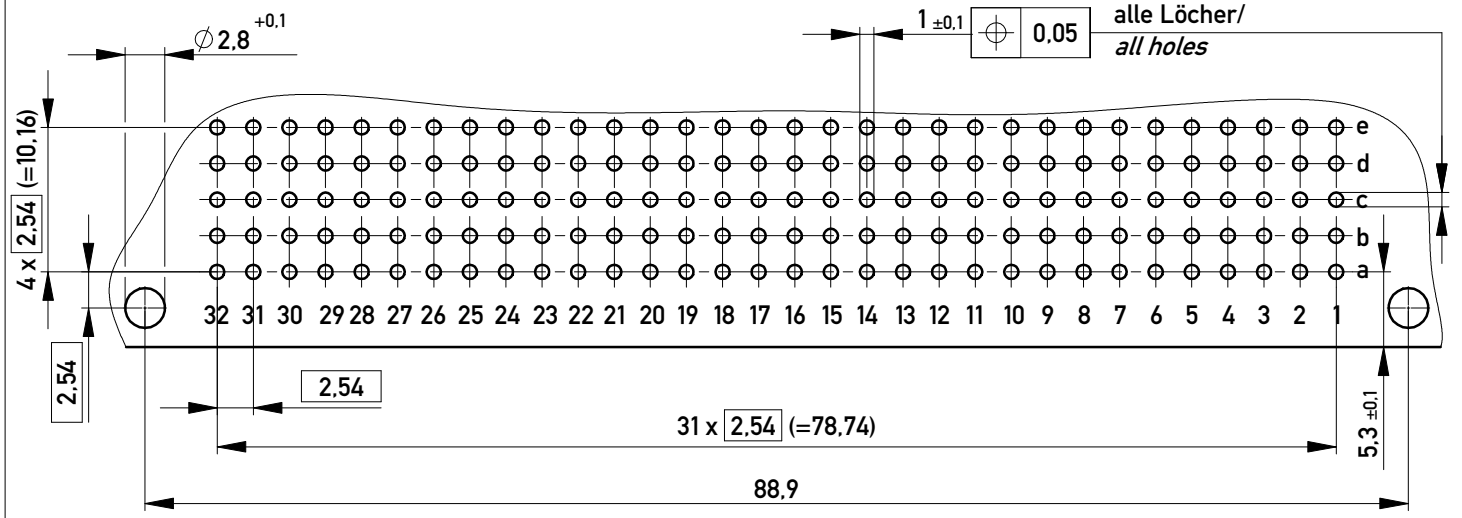


Stecklänge / mating length



E = early mate, late break / voreilend
S = standard
L = late mate, early break / nacheilend

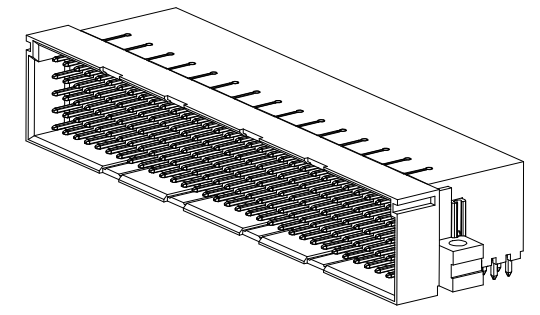

Lötanschluss 0,6x0,6mm / solder terminal 0,6x0,6mm
Isolierwerkstoff / housing material : PBT GF 30
Bauart 4 / type 4
Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles
Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Information:			Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation	
a			 www.ERNI.com		Messerleiste E160 Löt Male Conn. E160 solder	
Index			18.10.2011		384298	
Date					I A3	
Class			STVE			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[384298](#)