


## Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering

The figure shows a 10-pos. version of the product in green

### Product Features

- Combination with MC 1,5 pin strips for primary/secondary/PCB connection
- Plug-in direction horizontal and vertical to the PCB
- Use in shock-proof applications
- Clear separation of PCB inputs/outputs
- Individual position coding by removing the coding tab and connecting the coding profile to the counterpart

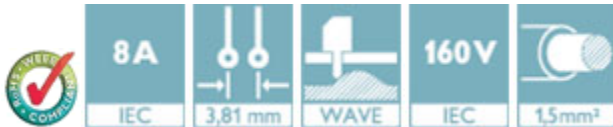

### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| Minimum order quantity               | 50 pc   |
| GTIN                                 | <br>4 017918 133931 |
| Weight per Piece (excluding packing) | 1.17 g  |
| Custom tariff number                 | 85366990  |
| Country of origin                    | Poland  |

### Technical data

#### Dimensions

|             |         |
|-------------|---------|
| Length      | 6.85 mm |
| Pitch       | 3.81 mm |
| Dimension a | 7.62 mm |

## Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

### Technical data

#### Dimensions

|                          |         |
|--------------------------|---------|
| Constructional height    | 15 mm   |
| Length of the solder pin | 3.4 mm  |
| Pin dimensions           | 1,12 mm |
| Hole diameter            | 1.2 mm  |

#### General

|  |               |
|--|---------------|
| Range of articles                      | IMCV 1,5/..-G |
| Insulating material group              | I             |
| Rated surge voltage (III/3)            | 2.5 kV        |
| Rated surge voltage (III/2)            | 2.5 kV        |
| Rated surge voltage (II/2)             | 2.5 kV        |
| Rated voltage (III/3)                  | 160 V         |
| Rated voltage (III/2)                  | 160 V         |
| Rated voltage (II/2)                   | 320 V         |
| Connection in acc. with standard       | EN-VDE        |
| Nominal current $I_N$                  | 8 A           |
| Maximum load current                   | 8 A           |
| Insulating material                    | PA            |
| Flammability rating according to UL 94 | V0            |
| Color                                  | green         |
| Number of positions                    | 3             |

#### Standards and Regulations

|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
|  | CUL    |
| Flammability rating according to UL 94 | V0     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

# Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

## Approvals

### Approvals

#### Approvals

VDE Gutachten mit Fertigungsüberwachung / IECEx CB Scheme / CCA / EAC / cULus Recognized / EAC

#### Ex Approvals

#### Approvals submitted

### Approval details

|   |       |
|---|-------|
| VDE Gutachten mit Fertigungsüberwachung |       |
| Nominal current IN                      | 8 A   |
| Nominal voltage UN                      | 160 V |

|                    |     |
|--------------------|-----|
| IECEE CB Scheme    |     |
| Nominal current IN | 8 A |

## Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

### Approvals

|                    |       |
|--------------------|-------|
| Nominal voltage UN | 160 V |
|--------------------|-------|

|                    |       |
|--------------------|-------|
| CCA                |       |
| Nominal current IN | 8 A   |
| Nominal voltage UN | 160 V |

|     |
|-----|
| EAC |
|-----|

|                    |       |       |
|--------------------|-------|-------|
| cULus Recognized   |       |       |
|                    | B     | D     |
| Nominal current IN | 8 A   | 8 A   |
| Nominal voltage UN | 300 V | 300 V |

|     |
|-----|
| EAC |
|-----|

### Accessories

#### Accessories

##### Labeled terminal marker

Marker card - SK 3,81/2,8:FORTL.ZAHLEN - 0804109



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: Adhesive, for terminal block width: 3.81 mm, Lettering field: 3.81 x 2.8 mm

### Additional products

Base strip - MCO 1,5/ 3-GR-3,81 - 1861659



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering

## Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

### Accessories

Base strip - MCO 1,5/ 3-GL-3,81 - 1861730



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering

Base strip - MCDV 1,5/ 3-G1-3,81 - 1847738



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

Base strip - MCDV 1,5/ 3-G-3,81 - 1830415



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

Base strip - MCD 1,5/ 3-G1-3,81 - 1843088



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

Base strip - MCD 1,5/ 3-G-3,81 - 1829963



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering, In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

## Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

### Accessories

Printed-circuit board connector - IMC 1,5/ 3-ST-3,81 - 1857896

Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin



Base strip - MCVK 1,5/ 3-G-3,81 - 1832743



Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin, Mounting: DIN rail

Base strip - MCVDU 1,5/ 3-G-3,81 - 1832701



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering

Base strip - MCV 1,5/ 3-G-3,81 - 1803439



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering

Base strip - MC 1,5/ 3-G-3,81 - 1803280

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering



## Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

### Accessories

#### Base strip - MC 1,5/ 3-G-3,81 THT - 1908774

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: black, Contact surface: Tin, Mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"



---

#### Base strip - SMC 1,5/ 3-G-3,81 - 1827282

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering



---

#### Base strip - EMCV 1,5/ 3-G-3,81 - 1860650

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Press-in technology



---

#### Base strip - EMC 1,5/ 3-G-3,81 - 1897814

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 3.81 mm, Color: green, Contact surface: Tin, Mounting: Press-in technology




---


### Drawings

# Base strip - IMCV 1,5/ 3-G-3,81 - 1875438

Drilling diagram

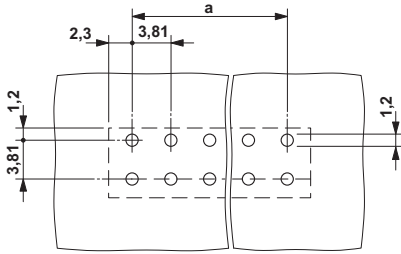

Dimensional drawing

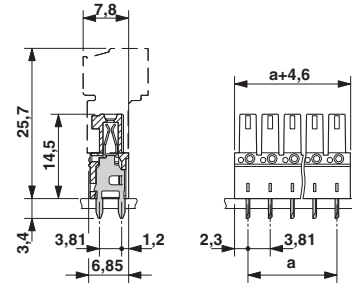



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1875438](#)