



AUDIO JACKS: STX-3501 Series

Right Angle 3.5mm Audio Jack

Product Features

Audio Applications for Computers and Multimedia
Through Hole Design
All Plastic
CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing

High Temperature Thermoplastic, Black Color ,
UL 94V-0 Rated

Terminals

Copper Alloy, Silver Plating over Nickel Underplating

Mechanical Characteristics

Insertion Force

0.3kg Max.

Extraction Force

0.2kg Min.

Durability

5000 Mating Cycles

Electrical Characteristics

Contact Resistance

Before Durability Test

50 milliohms Max.

After Durability Test

100 milliohms Max.

Insulation Resistance

100 Megohms Min. at 500V DC

Dielectric Withstanding Voltage

500V AC RMS for 1 Minute

Operating Temperature

-25°C to + 85°C

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

	-		
Series		Number of Pins	Threading Option

Series

STX-3501 - Right Angle 3.5mm Audio Jack

Number of Pins

3 - Pins

4 - Pins

Threading Option


N - Non-Threaded Barrel

Contact Kycon for other options

STX-3501

Dimensions in mm

STX-3501-3N

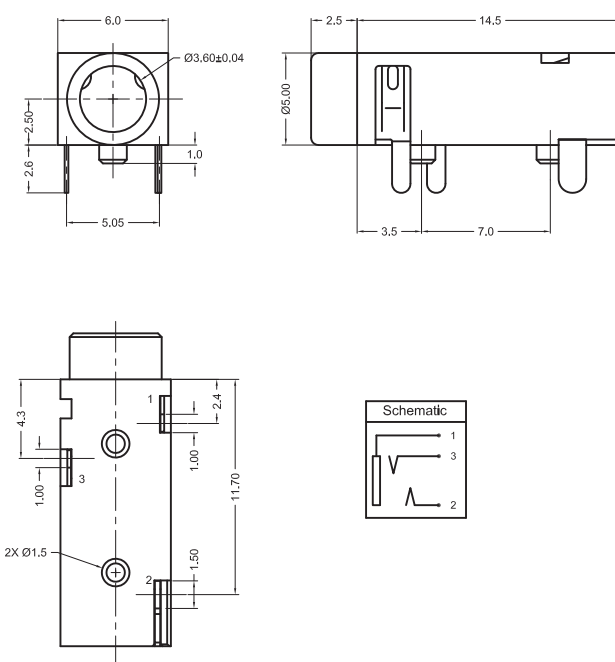

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[STX-3501-3N-701C](#) [STX-3501-3N-577C](#) [STX-3501-3N-284C](#) [STX-3501-4N-577C](#)