

7

6

5

4

3

2


1

View on mating side

[illegible]

A = 16 standard contacts L=3
C = 16 standard contacts L=3

S = 32 total number of contacts

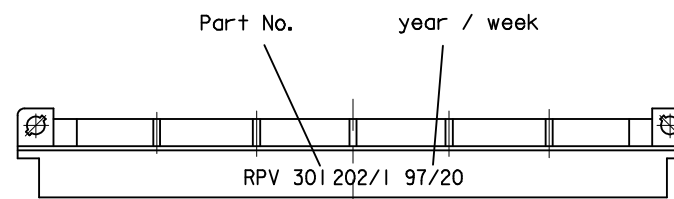

Printing beside row c

Marking	Customer special
Performance level	Customer special
Flux proof	no
Fixing clip	no
Dimensions	SDA-85003-000I sht.7
Technical Data	PS-85003-000I

C	special	c +3+5+7....3
A	special	a +3+5+7....3
Contact symbol	Perform. level	Contact position number

ENTER DESCRIPTION EC NO: I2009-0240 DRWN:PJT CHKD:MR HARSHA APPR:KPRASAD		2008/11/28 2008/11/29 2008/11/29		DESCRIPTION		QUALITY SYMBOLS ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
								mm INCH		DRAWN BY DATE		TITLE					
								4 PLACES ± --- ± ---		CA 1997/05/16		96 POS.					
								3 PLACES ± --- ± ---		CHECKED BY DATE		MALE DIN CONNECTOR					
								2 PLACES ± --- ± ---		KN 1997/05/16		RPV 301 202/1					
								1 PLACE ± --- ± ---		APPROVED BY DATE		MOLEX MOLEX INCORPORATED					
								ANGULAR ± ---°		JB 1997/05/16							
								DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. ENTER PART		DOCUMENT NO. SDA-85300-0464		SHEET NO. 1 OF 00			
										SIZE A 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

6

5

4

3

2

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[85300-0464](#)