


4805 (1/15)

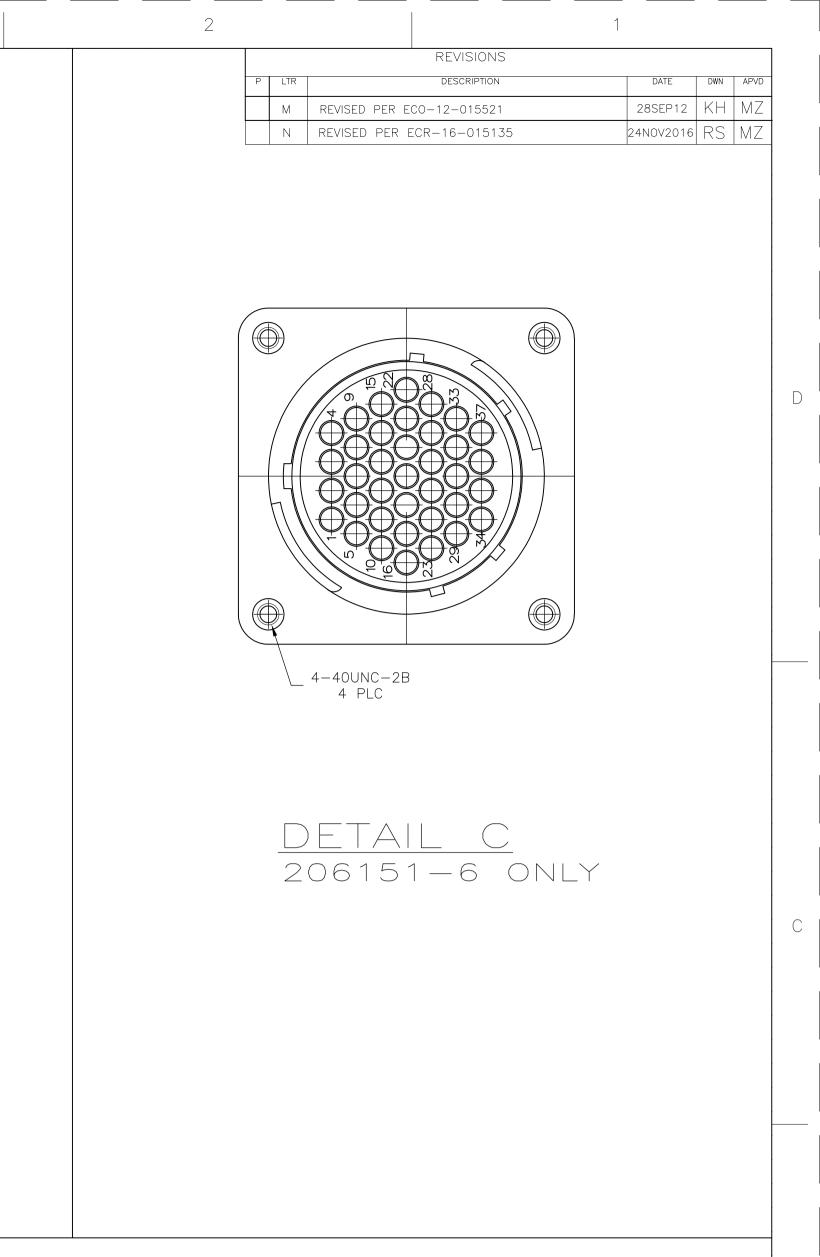

1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.

2 WILL ACCEPT THIRTY-SEVEN (37) MULTIMATE PIN CONTACTS.

3 NO 4 FASTENER RECOMMENDED FOR MOUNTING.

4 white dot near postion 1 on wire entry face.

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

В

STANDARD		YES		A		206151-8			
STANDARD		NO		A & C			206151-6-		
SMALL PACK		NO		,	A		-206151-5-		
STANDARD		YES		[3		206151-4		
STANDARD		YES		,	A		206151-3		
STANDARD		NO			3		206151-2		
STANDARD		NO		,	A		206151		- 1
PACKAGING		PERIPHERAL SEAL		SEE [DETAIL	_ PA	rt M	JUN	1BER
IG IS A CONTROLLEI		CHK A EDANITI IM		E TE	TE	Conne	ctivity	, ,	
S 0 PLC 1 PLC 2 PLC 3 PLC	ANCES UNLESS VISE SPECIFIED: ± - ± - ± 005	APVD R STONE PRODUCT SPEC APPLICATION SPEC	8/13/83 NAME	RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 23, CPC					
4 PLC ANGLES	± - ± -								RESTRICTED TO
N BLACK	_	WEIGHT	A 1	00779	C- 206	6151			
IER, GREY		CUSTOMER DRA	WING			scale 2:1	SHEET	1 ^{OF}	1 REV

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 206151-4