

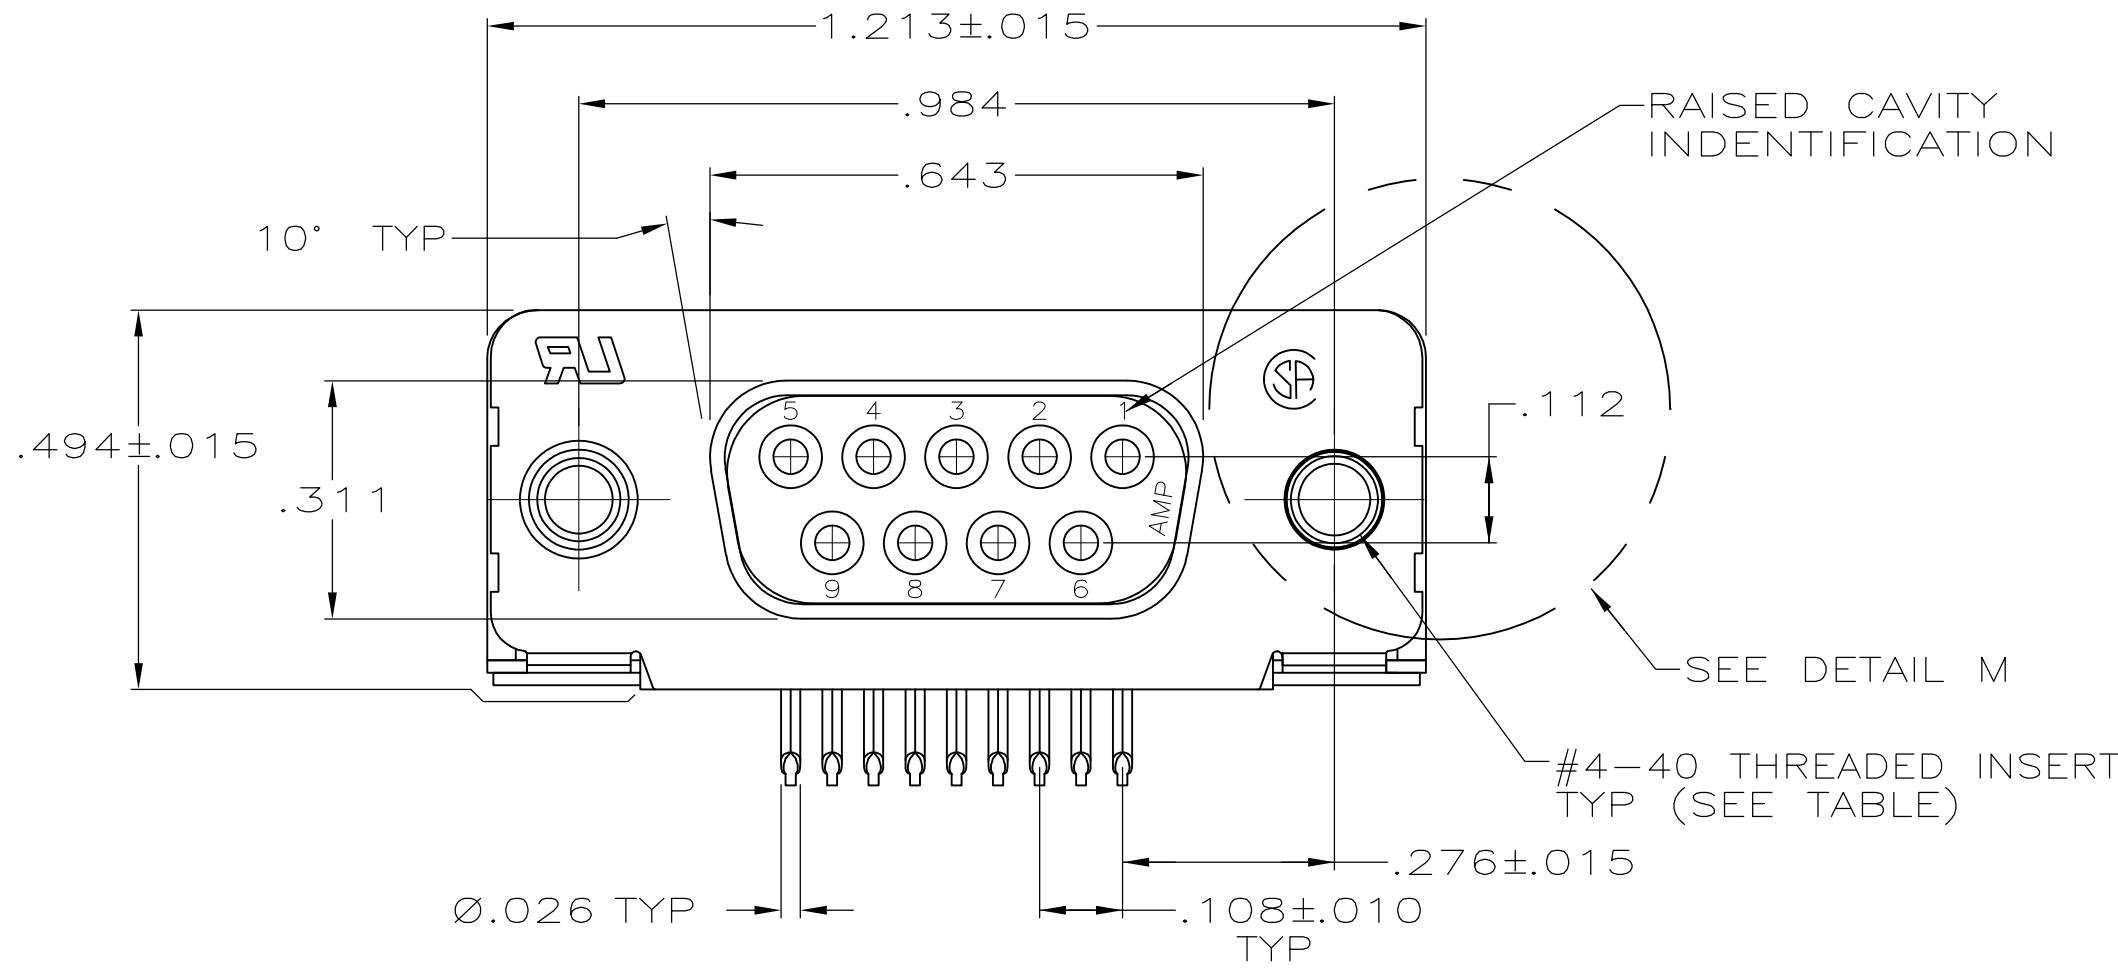
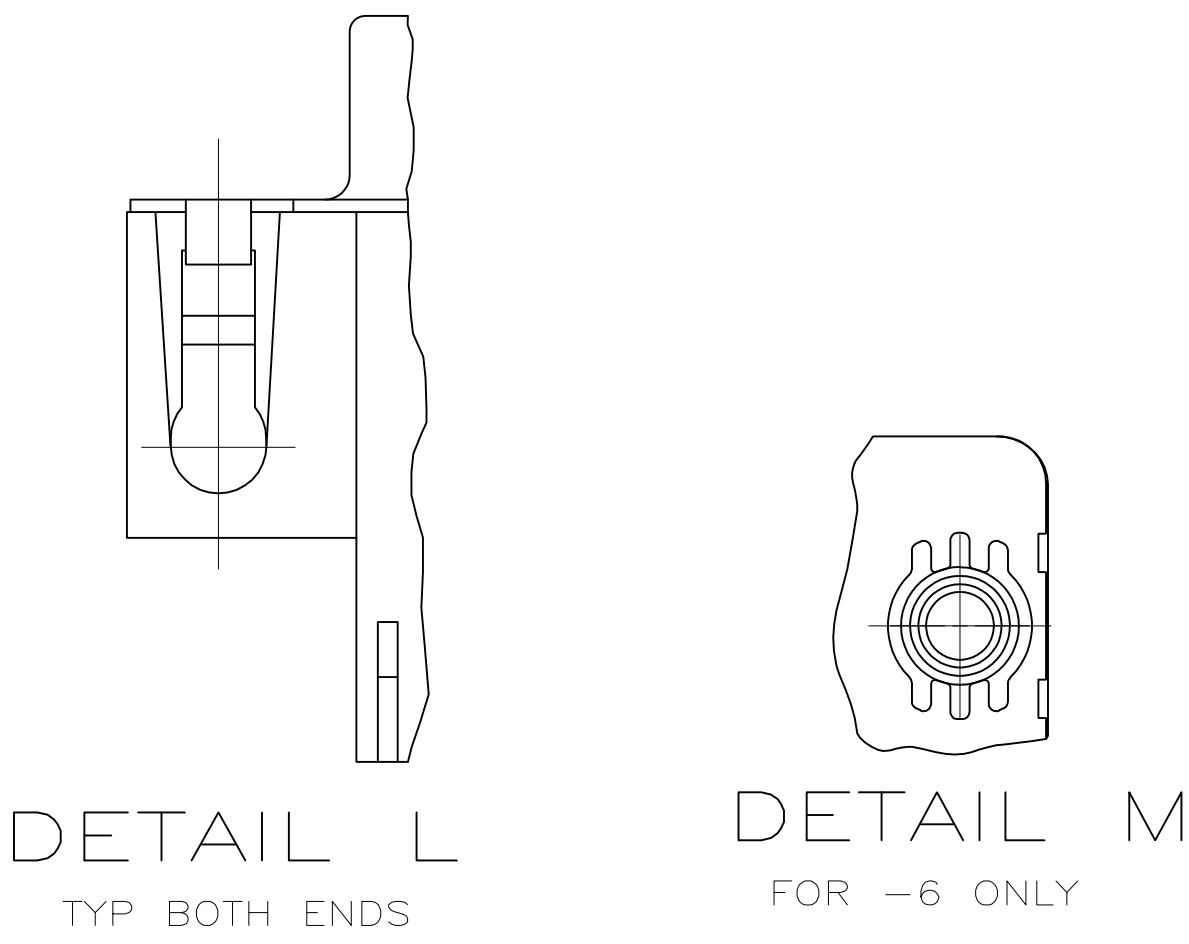
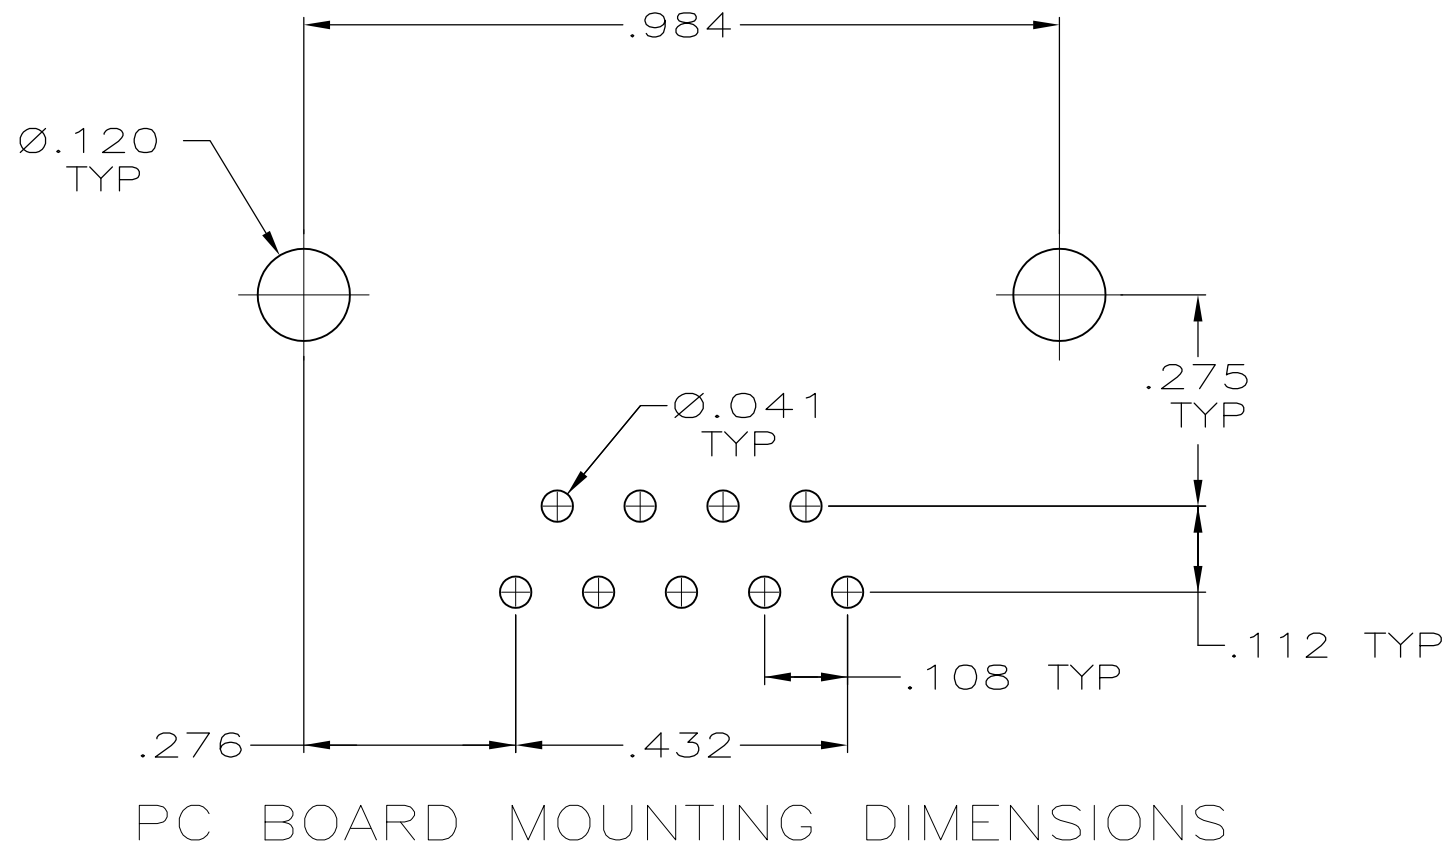


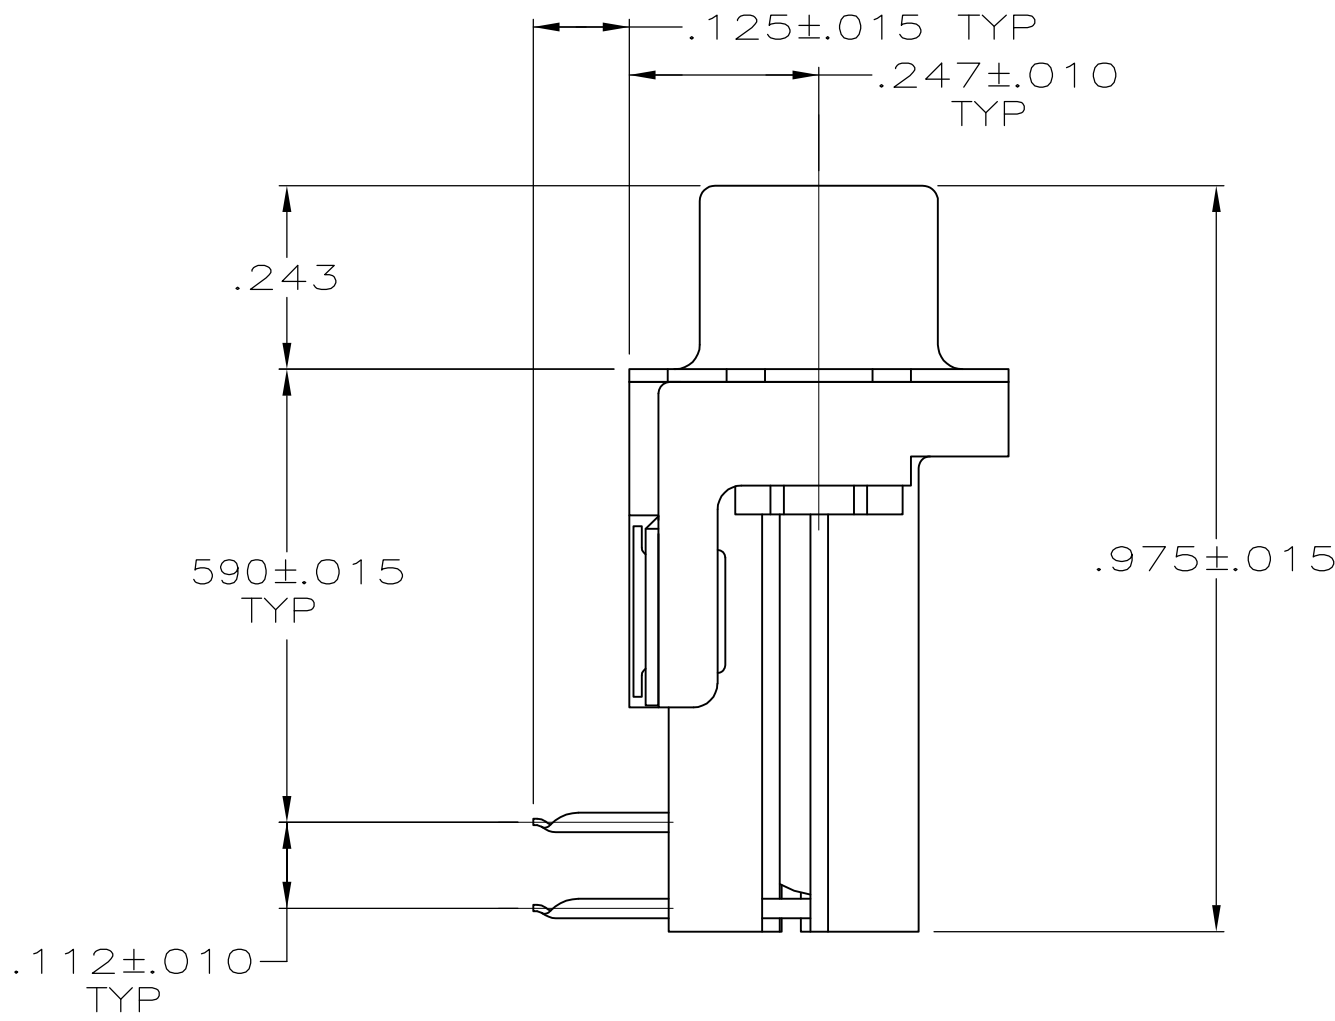

1. CONNECTOR MATES WITH ANY 9 POSN PLUG IN AMPLIMITE SERIES & COMPLIES WITH AMP SPEC 108-40005 WHERE APPLICABLE.
2. MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC, BLACK.
SHELL: STEEL.
CONTACTS: PHOSPHOR BRONZE.
EYELETS: BRASS.
SCREWLOCKS: ZINC.
INSERTS: ZINC.
3. SHELL: BRIGHT TIN.
CONTACTS: .000030 GOLD FOR A DISTANCE OF .100 MIN FROM MATING END, TIN PLATED .000100-.000200 ON SOLDER POST, ALL OVER .000050 NICKEL.
EYELETS: TIN.
SCREWLOCKS: CLEAR CHROMATE.
INSERTS: CLEAR CHROMATE.

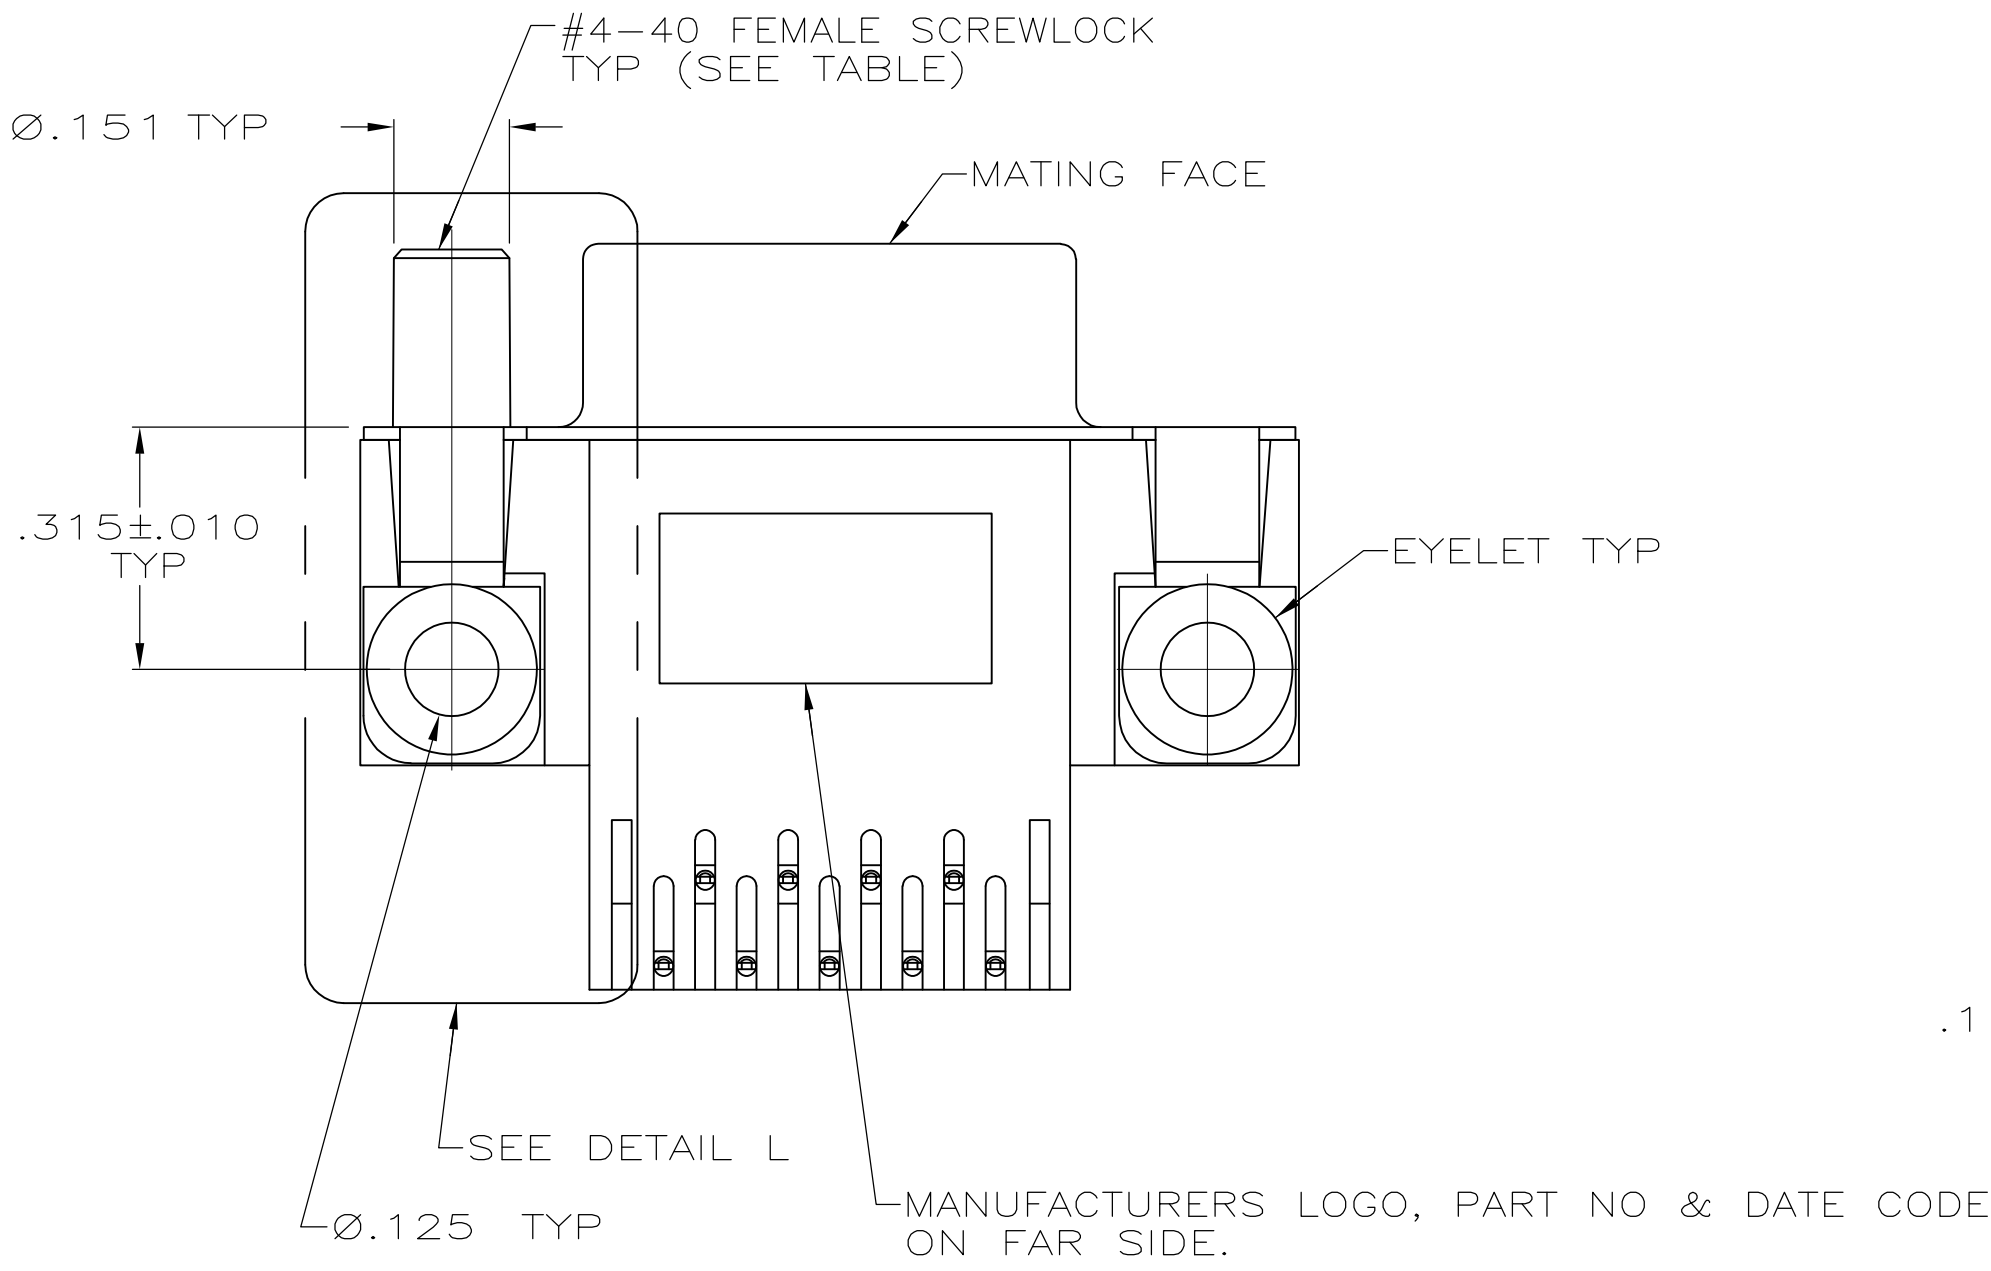

FEMALE SCREWLOCKS	5745988-6
THREADED INSERTS	5745988-4
MOUNTING HARDWARE	PART NUMBER

**COPYRIGHT 2005
TE CONNECTIVITY CORP
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ-DOCK5 04-08-05	TE Connectivity	
DIMENSIONS: INCHES		CHK J. GERACE 04-08-05	NAME	
		APP'D M. WALMSLEY 04-08-05	PRODUCT SPEC	
			108-40025	
			APPLICATION SPEC	
MATERIAL		FINISH	SIZE	RESTRICTED TO
2		3	A1	
WEIGHT		—	00779	5745988
CUSTOMER DRAWING		SCALE	4:1	SHEET 1 OF 1 REV P

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5745988-6](#)