

PRODUCT NUMBER
75189-YYY-XXLF

RoHS COMPLIANT & COMPATIBLE, SEE NOTE 7

NUMBER OF CONTACTS, 2 TO 18.

PIN STYLE

STYLE	"A"±0.2	"B"±0.35	"J" REF
01	5.72	2.57	9.65
13	5.72	3.45	9.65





PLATING:

1 = 0.76µm FULL GOLD

1.27µm Ni MIN UNDERPLATING

NOTES:

1. HOUSING MAT'L : HIGH TEMPERATURE THERMOPLASTIC FLAME RETARDANT PER UL94-V0, COLOR BLACK.
2. PIN MATERIAL : PHOSPHOR BRONZE.
3. DIM 1.27^{+0.03}_{-0.13} FOR MOULDED SIDE(S) ONLY. IF SIDE(S) ARE BROKEN, DIM 1.02 TO 1.7 MAX APPLIES.
4. PIN PUSH OUT FORCE : 12N MIN.
5. PRODUCT PACKAGED IN POLY BAGS.
6. TO DETERMINE DIMENSIONS :
N = NUMBER OF CONTACTS
7. RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - LF MEANS THE PRODUCT IS LEAD-FREE
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - c - LABELING
 - d - LEGAL STATEMENT: SEE GS-47-0004

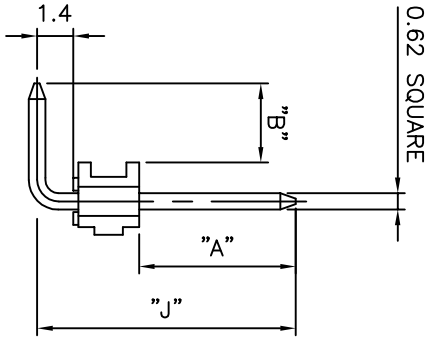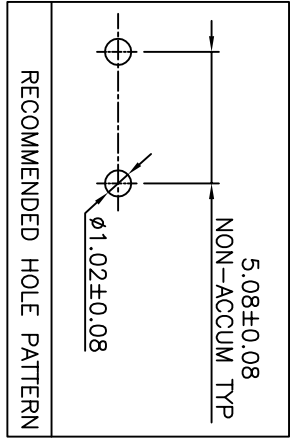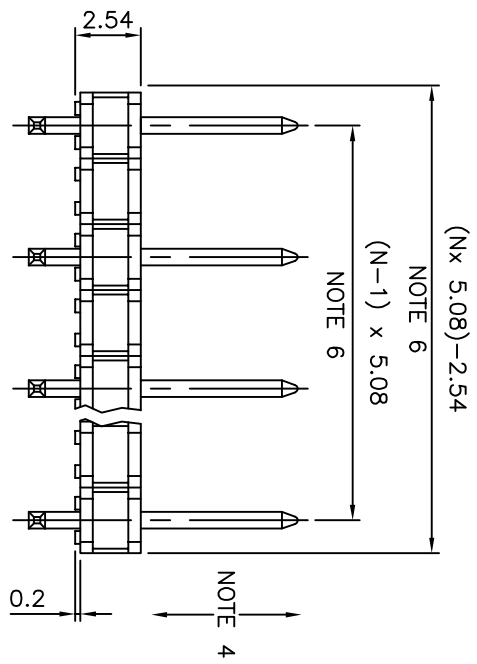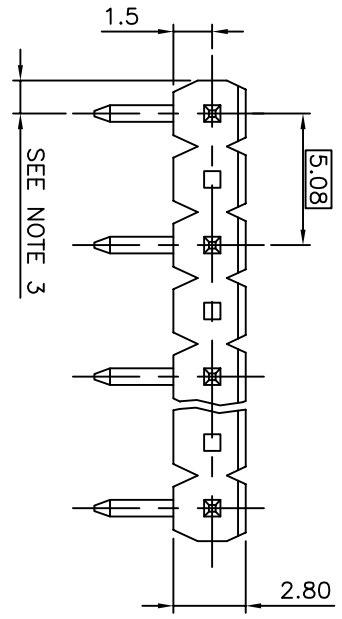

mat'l. code				surface		tolerance		projection		product family	
ltr	ecn no	dr	date	ISO 1302	ISO 406	ISO 1101			BSTIK		
H	F10076	JMC	91.02.25	tolerances unless otherwise specified			x ±0.3		HEADER,SR,RA, POL 5.08mm		
J	F05-0186	JCO	05.06.09	angles			xx ±0.15				
K	F06-0196	LMU	06.06.20	linear			scale 5:1				
L	B-19261	LMU	14.10.31	dr			LMU				
				engr			J.COMPAIGNON				
				chr							
				appt			JCO				
sheet	revision								type CUSTOMER Drawing		
index	sheet										