


Product data sheet

Characteristics

XZCP1264L2

pre-wired connectors XZ - elbowed female - M12 - 5 pins - cable PUR 2m

Product availability: Non-Stock - Not normally stocked in distribution facility

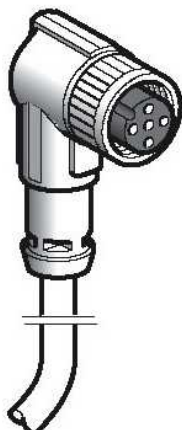

Main

Commercial Status	Commercialised
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Pre-wired connectors
Series name	General purpose
Electrical connection	Elbowed female connector M12, 5 pins (included earth pin)
Collar material	Metal
Status LED	Without
Cable length	6.56 ft (2 m)

Complementary

Cable connector fixing	Screw-on
Cable outer diameter	0.23 in (5.9 mm)
Cable composition	5 x 0.34 mm ²
Wire insulation material	PUR
[Ue] rated operational voltage	36 V DC 30 V AC
[In] rated current	4 A
Contact resistance	<= 5000 µOhm
Insulating resistance	>= 1 GΩ
Product weight	0.25 lb(US) (0.115 kg)

Environment

IP degree of protection	IP67
Ambient air temperature for operation	23...176 °F (-5...80 °C) (flexing) -40...176 °F (-40...80 °C) (static)
Ambient air temperature for storage	-40...176 °F (-40...80 °C)

Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	003389110763133
Nbr. of units in pkg.	1
Package weight(Lbs)	0.26
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	DE

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0649 - Schneider Electric declaration of conformity

Contractual warranty

Period	18 months
--------	-----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XZCP1264L2](#)