

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929


SWITCH-BASIC

CATALOG LISTING

BZ-2RW80722555105-A2

PRODUCT CODE: AQC9700

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ2RW80722555105A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM

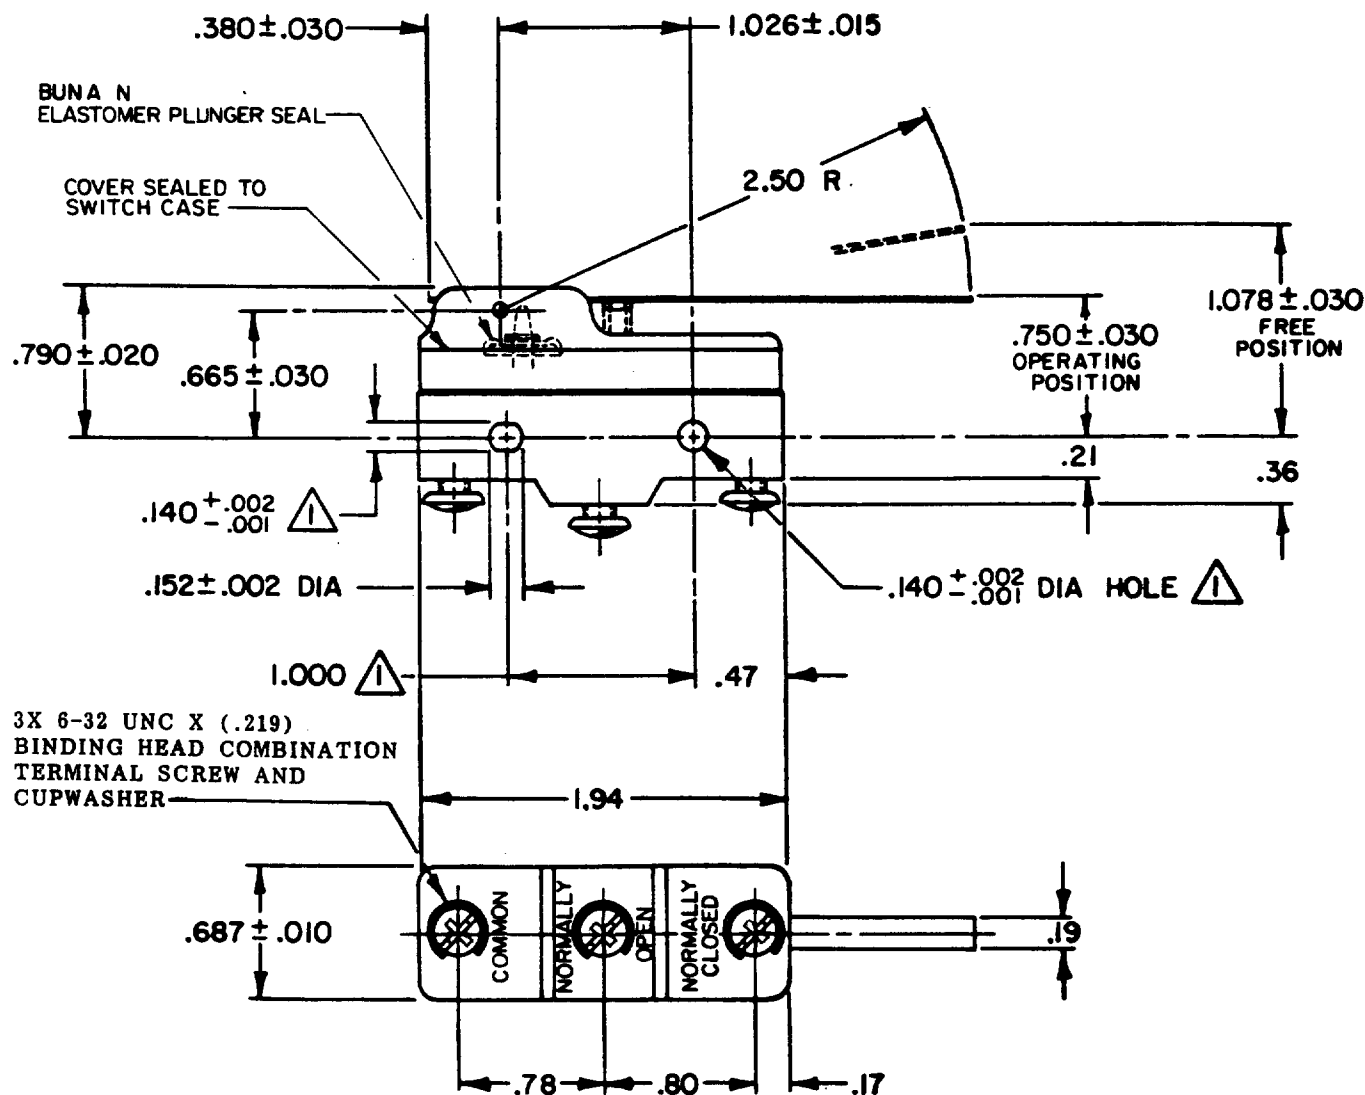


NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — 2 1/2 OZ MAX

RELEASE FORCE — 1/2 OZ MIN

DIFFERENTIAL TRAVEL — .007 - .050

OVERTRAVEL — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22

1A 125 VAC

L288
L307
L315



1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

	DES.	TOL.	DES.	TOL.
	mm	mil/in	in	mm/in
NO PLACES	2	1/64	2	0.015
ONE PLACE	2, X	0.01/0.015	2, X	0.007/0.015
TWO PLACES	X, XX	0.01/0.005	X, XX	0.007/0.005
THREE PLACES	XXX		XXX	

DESIGN UNITS ☐ SI METRIC

US CUSTOMARY ☒

WEIGHT

BZ-2RW80722555105-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
6

REPLACES X72349-BZ

RELEASE NO. PR-10187

11 DEC 08

RS

CHECK

23 NOV 05

RJ

DLT
19 AUG 98

D0016786

SPK
23 NOV 05

E0046794

KNR
11 DEC 08

CEB

18 MAY 81

81 MAY

13 MAY

RASTER

FO-52848-A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[SCN-1625SC](#)