


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0350989802

Status: Active

Overview: Standard Quick-Disconnect Terminals

Description: MP-Lock™ Quick Disconnect with Vibration Support, Female, for 16-20 AWG (1.30-0.50mm²), Metal Strip, Tab 5.20 x 0.51mm, Pre-Tin Plated

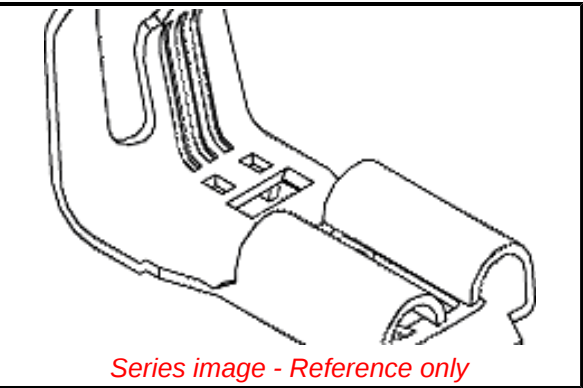

Documents:

Drawing (PDF)	Packaging Specification PK-35098-001-001 (PDF)
Product Specification PS-35097-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	Quick Disconnects
Series	35098
Crimp Quality Equipment	Yes
Insulated	No
Overview	Standard Quick-Disconnect Terminals
Product Name	MP-Lock™
Type	Quick Disconnect
UPC	800754898089

Physical

Barrel Type	Open
Gender	Female
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	None
Material - Metal	Brass
Net Weight	388.200/mg
Orientation	Straight
Packaging Type	Reel
Polarized to Mating Part	No
Tab Thickness	0.51mm
Tab Width	5.21mm
Temperature Range - Operating	-40°C to +120°C
Wire Insulation Diameter	3.40mm max.
Wire Size AWG	16, 18, 20
Wire Size mm²	0.50-1.30

Electrical

Voltage - Maximum	250V
-------------------	------

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-35098-001-001
Product Specification	PS-35097-001-001
Sales Drawing	SD-35098-9*02

EU ELV
Not Relevant

EU RoHS Compliant REACH SVHC Not Contained Per -ED/01/2017 (12 January 2017) Halogen-Free Status Low-Halogen	China RoHS
--	-------------------

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
35098 Series

Use With
5.21mm Tab

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[35098-9702](#) [35098-9802](#)