
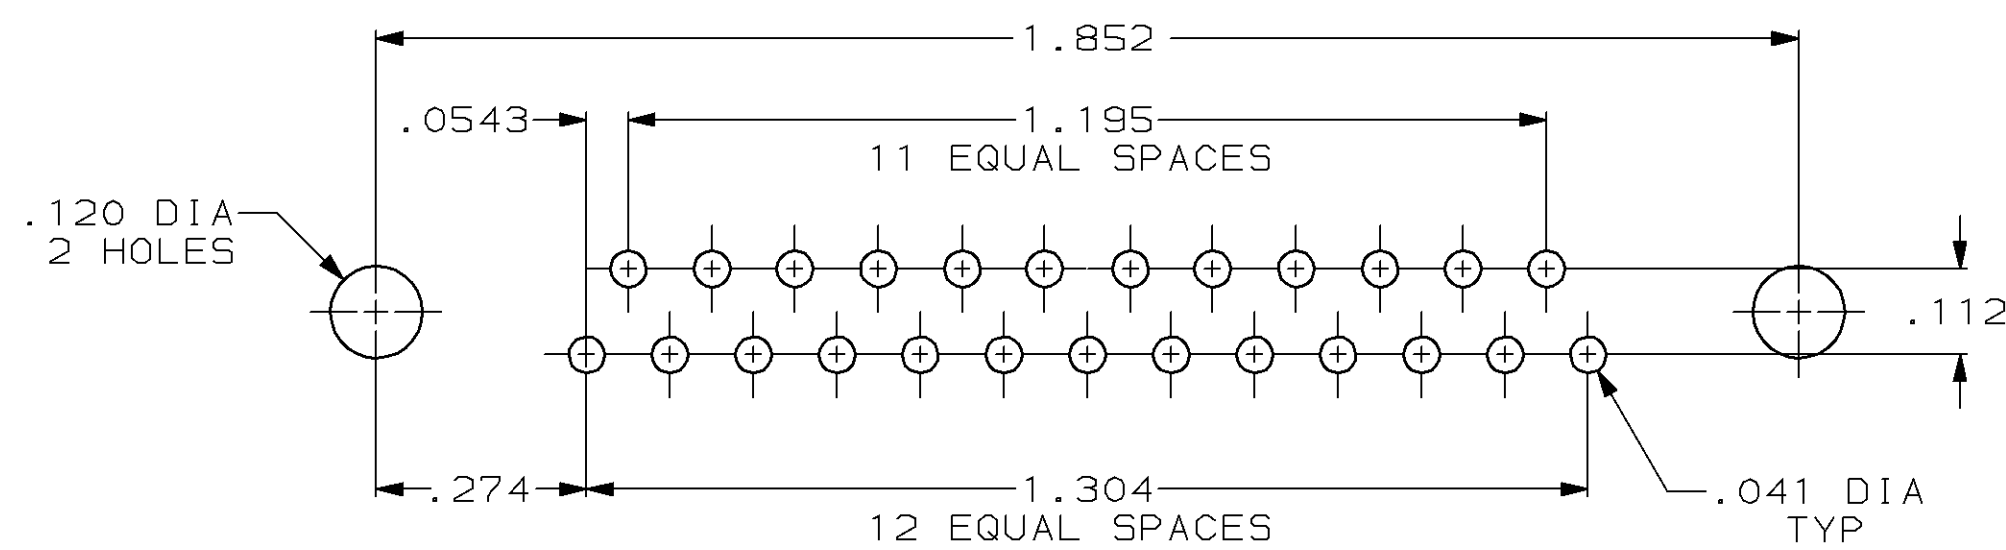
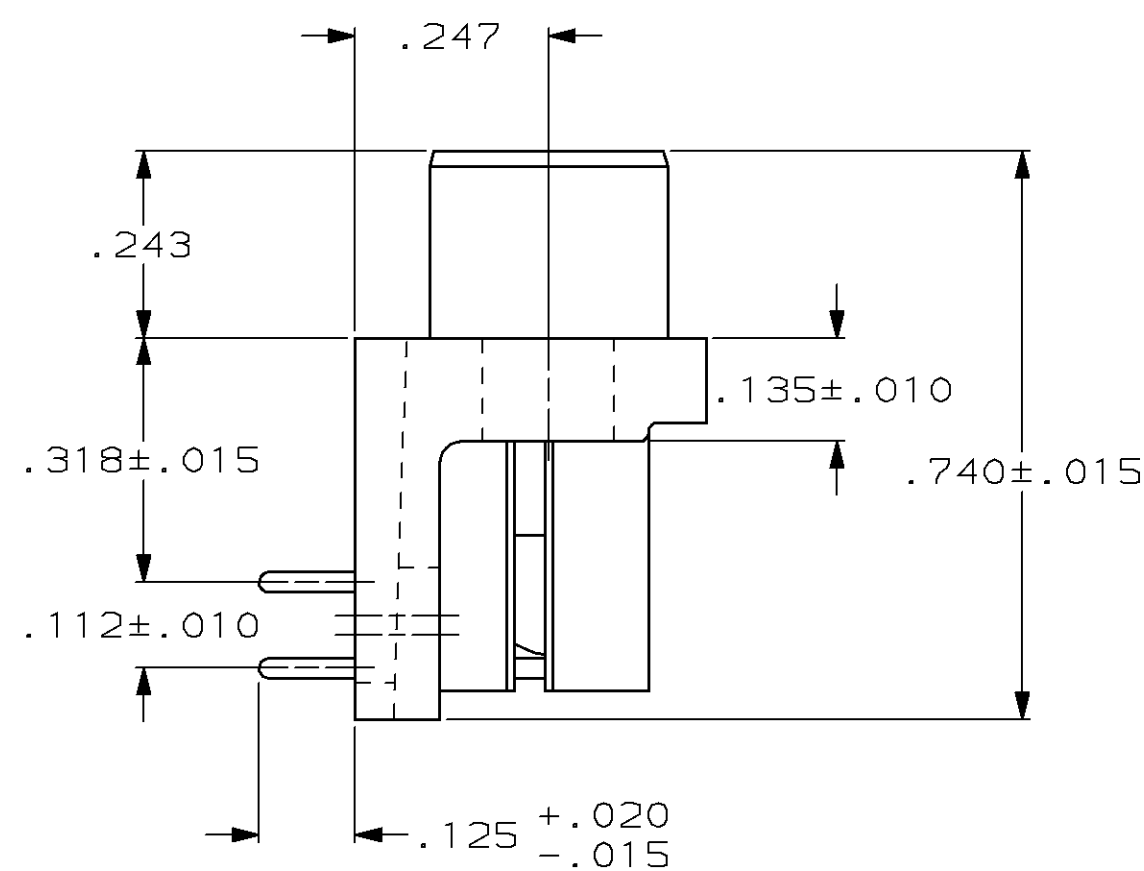
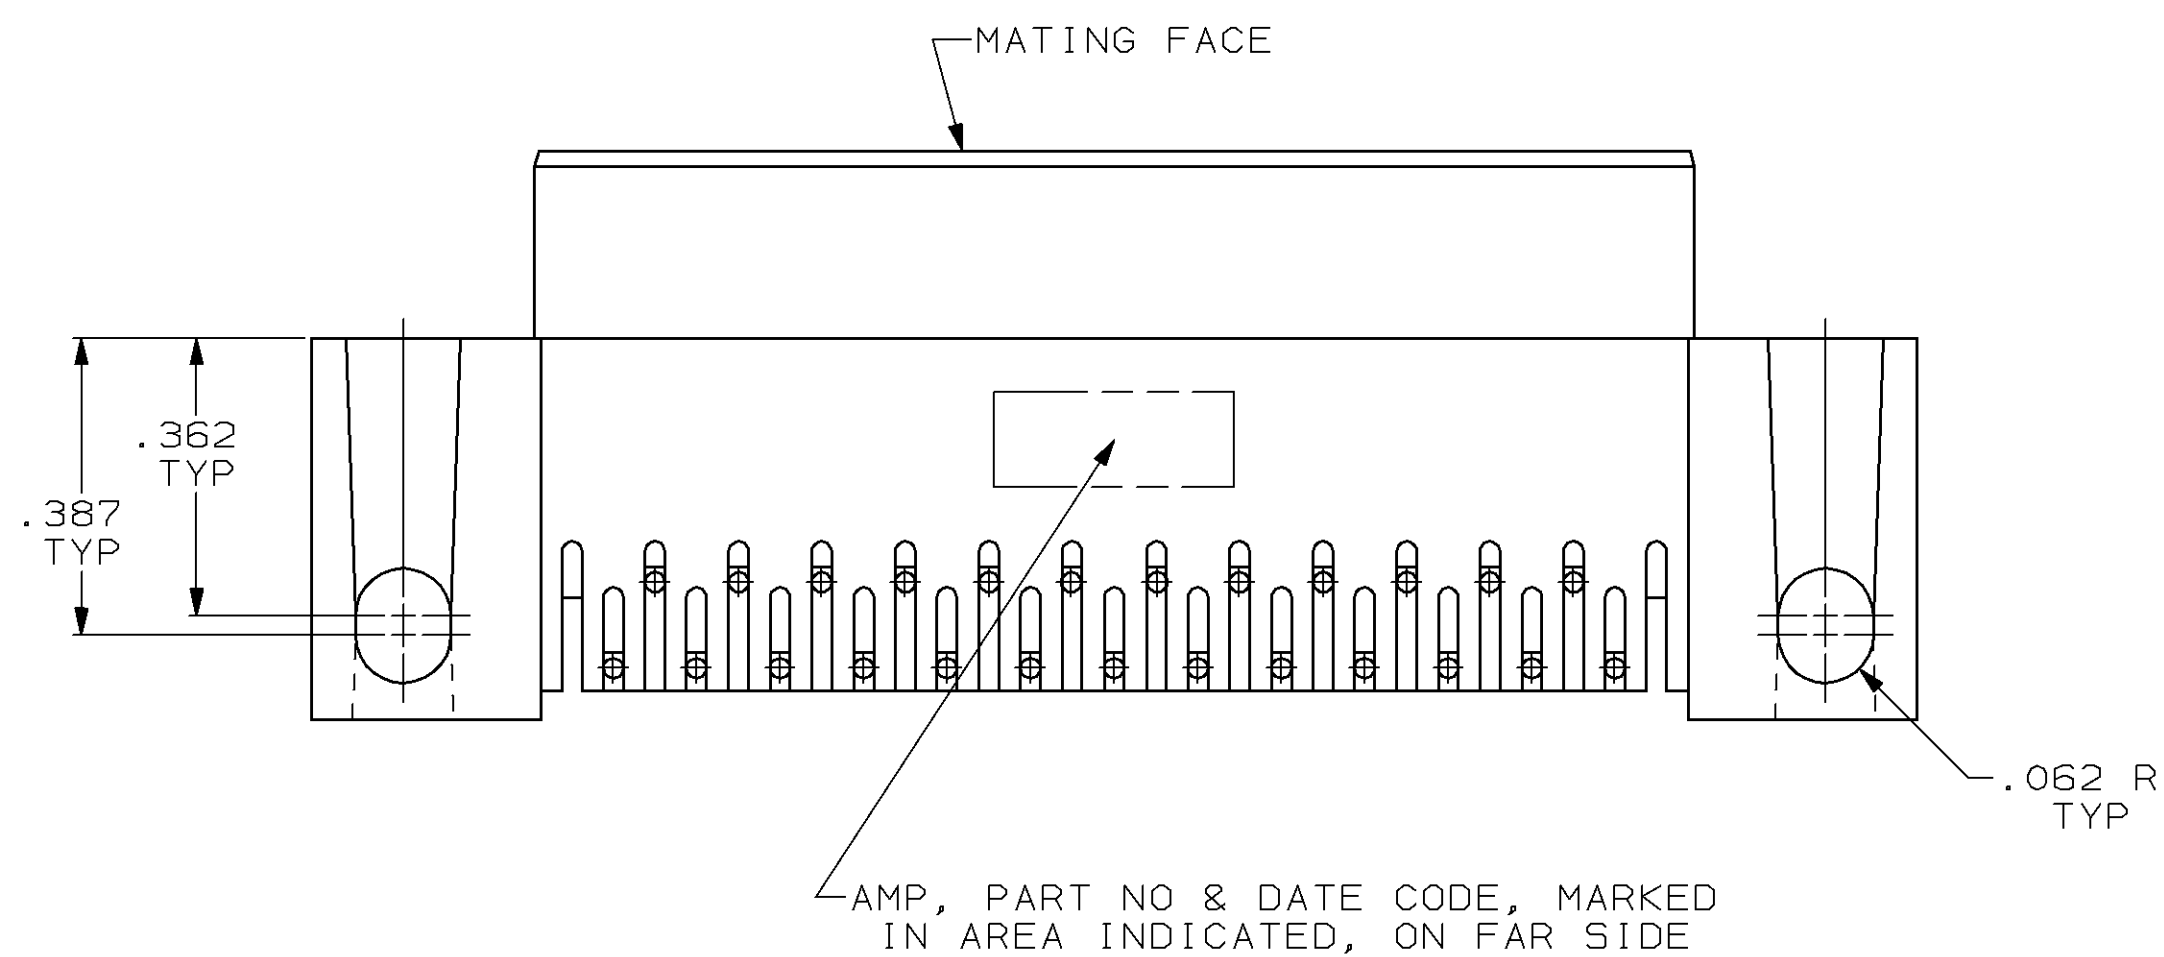


LOC	DIST	P	F	ZONE	LTR	REVISIONS		DATE	APPD
						DESCRIPTION			
	77				D	REV PER EC 0020-1448-95		10 JAN 96	RLT
					E	SUPSD -1 PER EC 0020-570-96		27 FEB 97	RT

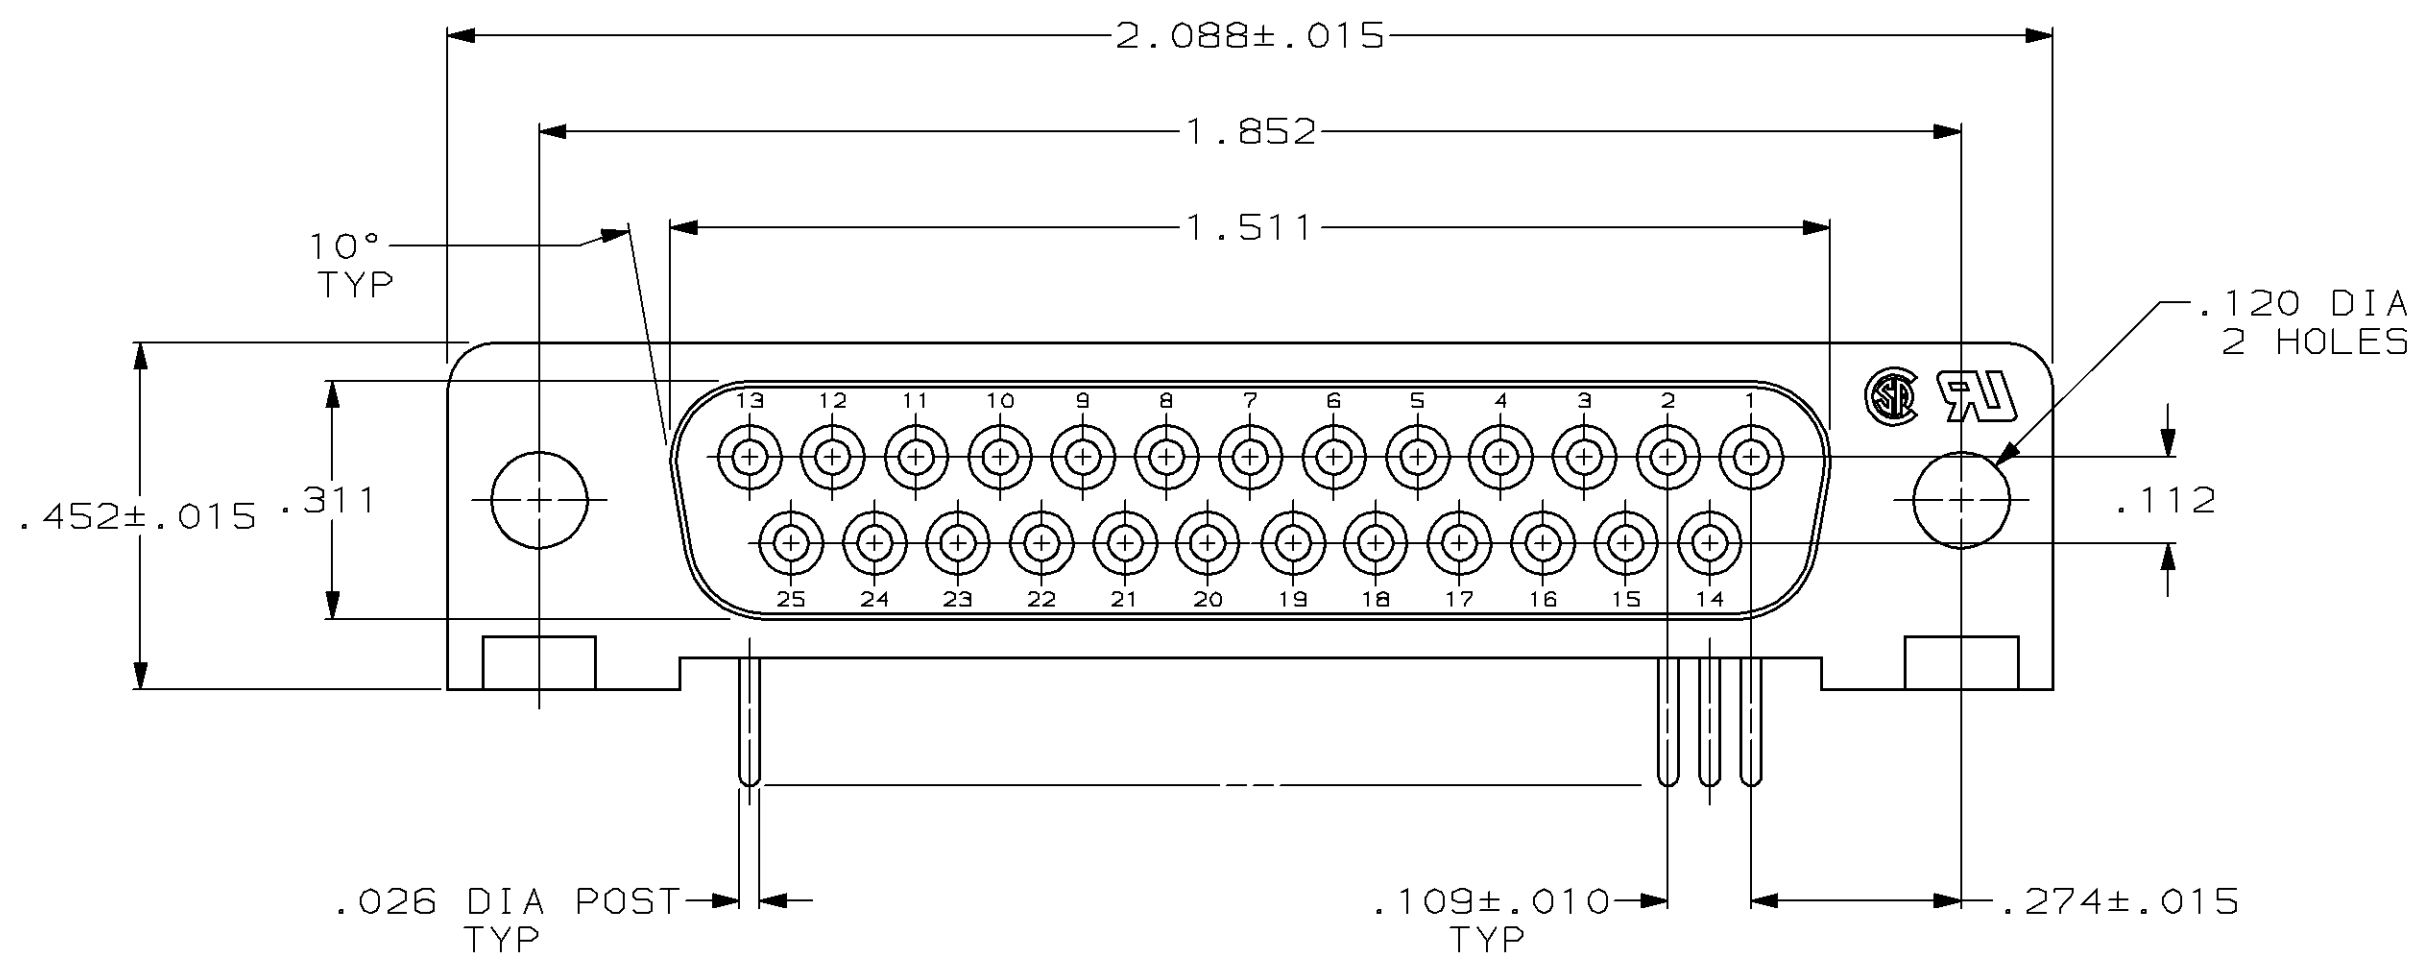

RECOMMENDED P.C. BOARD MOUNTING DIMENSIONS

- FLAME RETARDANT, 94V-0 RATED, GLASS FILLED NYLON OR POLYESTER, COLOR: BLACK.
- PHOS. BRONZE PER QQ-B-750.
- REFER TO APPLICATION SPEC FOR RECOMMENDED P.C. BOARD MOUNTING DIMENSIONS FOR AUTOMATIC INSERTION.
- GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290.
- PLATED WITH GOLD FLASH FOR LENGTH OF .055 MIN FROM MATING END, WITH POINT OF MEASUREMENT .035 FROM MATING END OF CONTACT, .000100-.000200 TIN OR TIN-LEAD ON SOLDER END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
- PLATED WITH .000030 GOLD FOR LENGTH OF .055 MIN FROM MATING END, WITH POINT OF MEASUREMENT .035 FROM MATING END OF CONTACT, .000100-.000200 TIN OR TIN-LEAD ON SOLDER END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.

SUPSD BY 745132-2		745132 -2
		745132 -1
	FINISH	PART NUMBER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON :		DR 4-7-87 S.WELDON	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
2 PL DEC ± .	CHK 4-14-87 C.RICHARD	APPD 4-27-87 B.TAYLOR		
3 PL DEC ± .005	APPD 5-5-87 J.ASSINI	PRODUCT SPEC 108-40005	NAME RECEPTACLE ASSY, SIZE 3, 25 POSN, RIGHT ANGLE, .318 SERIES, .026 DIA POSTS, AMPLIMITE® HD-20	
ANGLES ± 2°	APPLICATION SPEC 114-40015	WEIGHT -	SIZE D	FSCM NO 00779
MATERIAL MOLDED PARTS:			DRAWING NO 745132	
CONTACTS:			SCALE 4:1	SHEET 1 of 1
FINISH				
CONTACTS: SEE TABLE				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[745132-2](#)