


Cord Set

172-8363-E



Cord Set

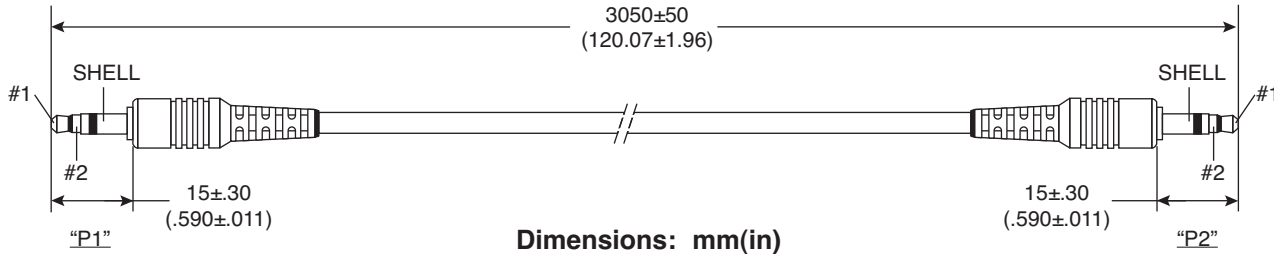

P1	COLOR	P2
1	WHITE	1
2	RED	2
SHELL	SPIRAL	SHELL

ELECTRICAL SPECIFICATIONS	
ITEM	SPECIFICATIONS
1	Operation Temperature: -10°C ~ + 80°C
2	Insulation Resistance: DC/250V, 10MΩ min.
3	Withstand Voltage: AC/250V, 5mA for one minute.
4	Continuity Test: 100%

MATERIAL SPECIFICATIONS	
SPECIFICATIONS	
1. Conductor: 26AWG (7/.16)x2C, Tinned Copper Wire.	
2. Insulation: PVC, 80°C, VW-1, ø.80±.05mm, Color: Red, White.	
3. Shield: Spiral (40±3/.10) Tinned Copper Wire.	
4. Jacket: PVC, Black Matte Surface, ø3.5±.15mm. L=3050+/-50mm.	
Tensile Strength:	
PHN/M/3.5 Overmold to cable shall withstand a load of 29.4N(3Kgf) for on minute.	
RoHS Compliant	

Date Last Revised: 10/27/08

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-301304

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

172-8363-E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[172-8363-E](#)