




REVISIONS						
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	U2	REVISED PER ECO-11-004587	11MAR11	RK	HMR	
	V	REVISED PER ECO-17-002209	11APR2017	RS	MM	

D

C

B

A

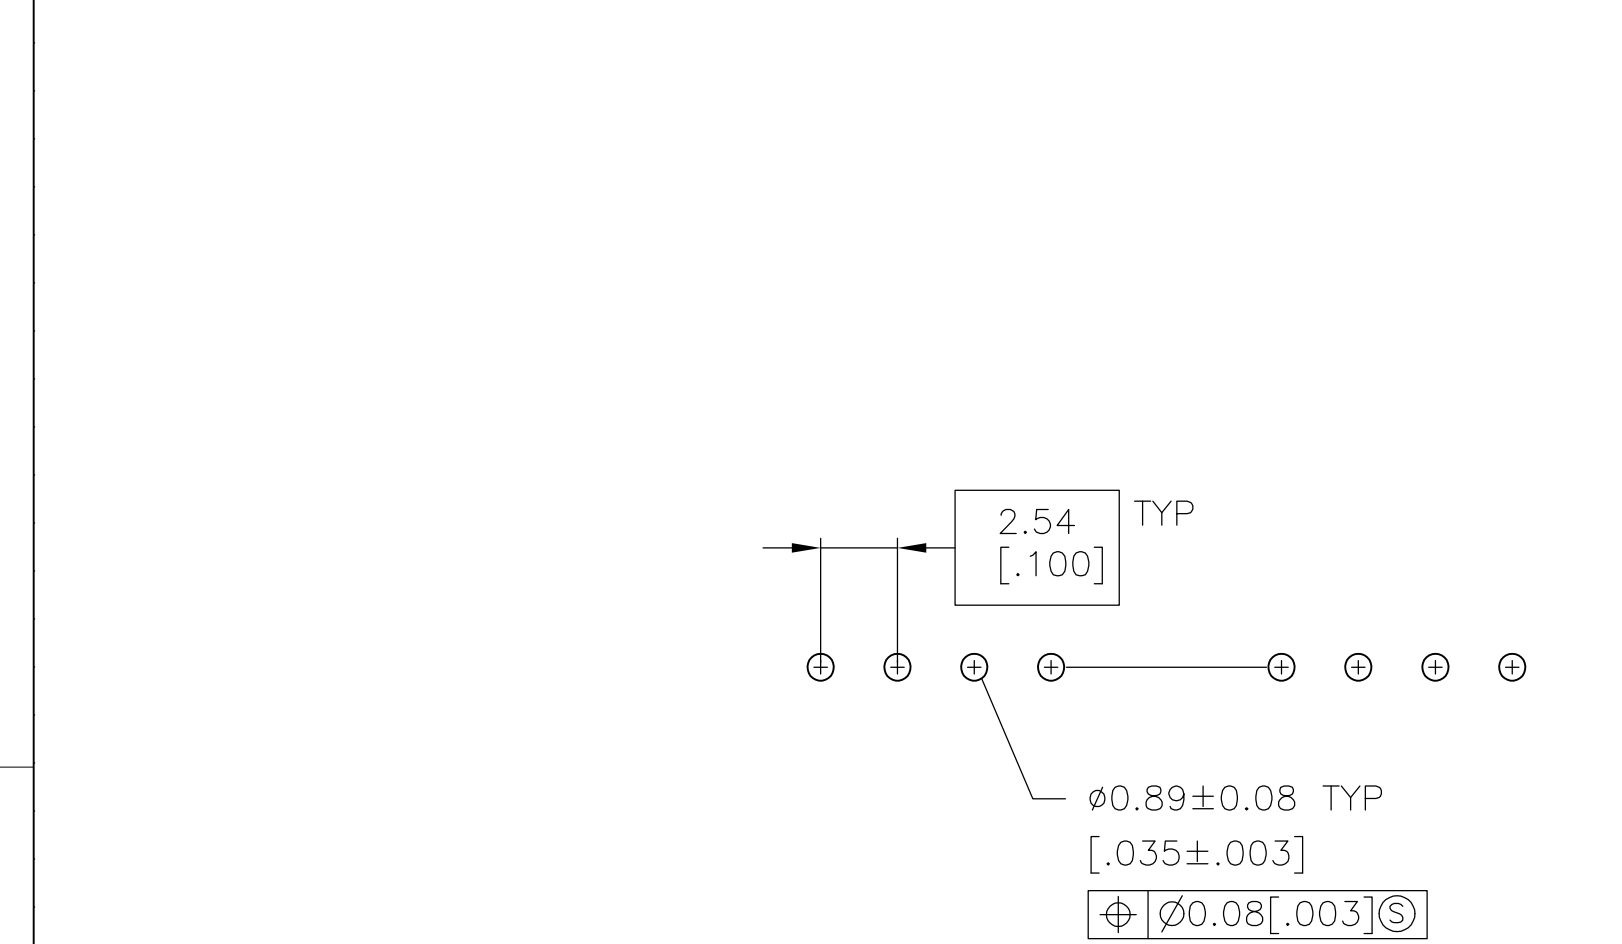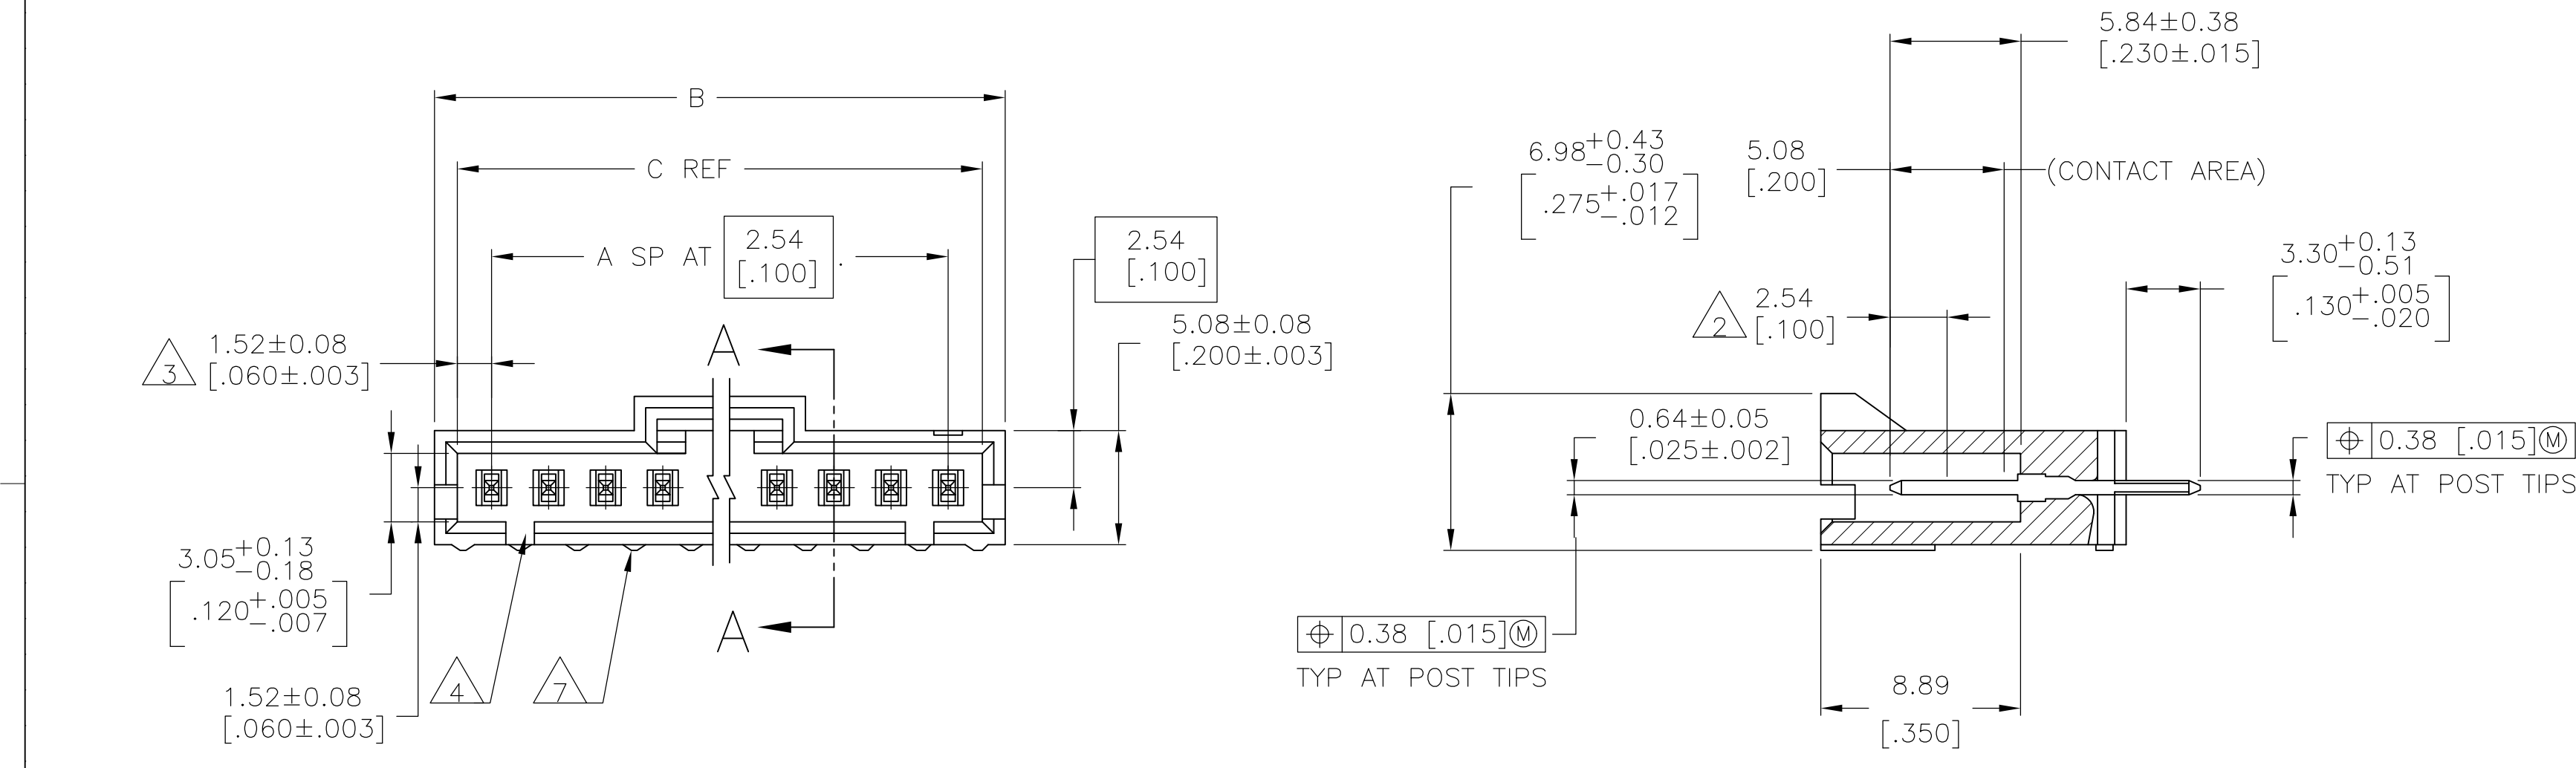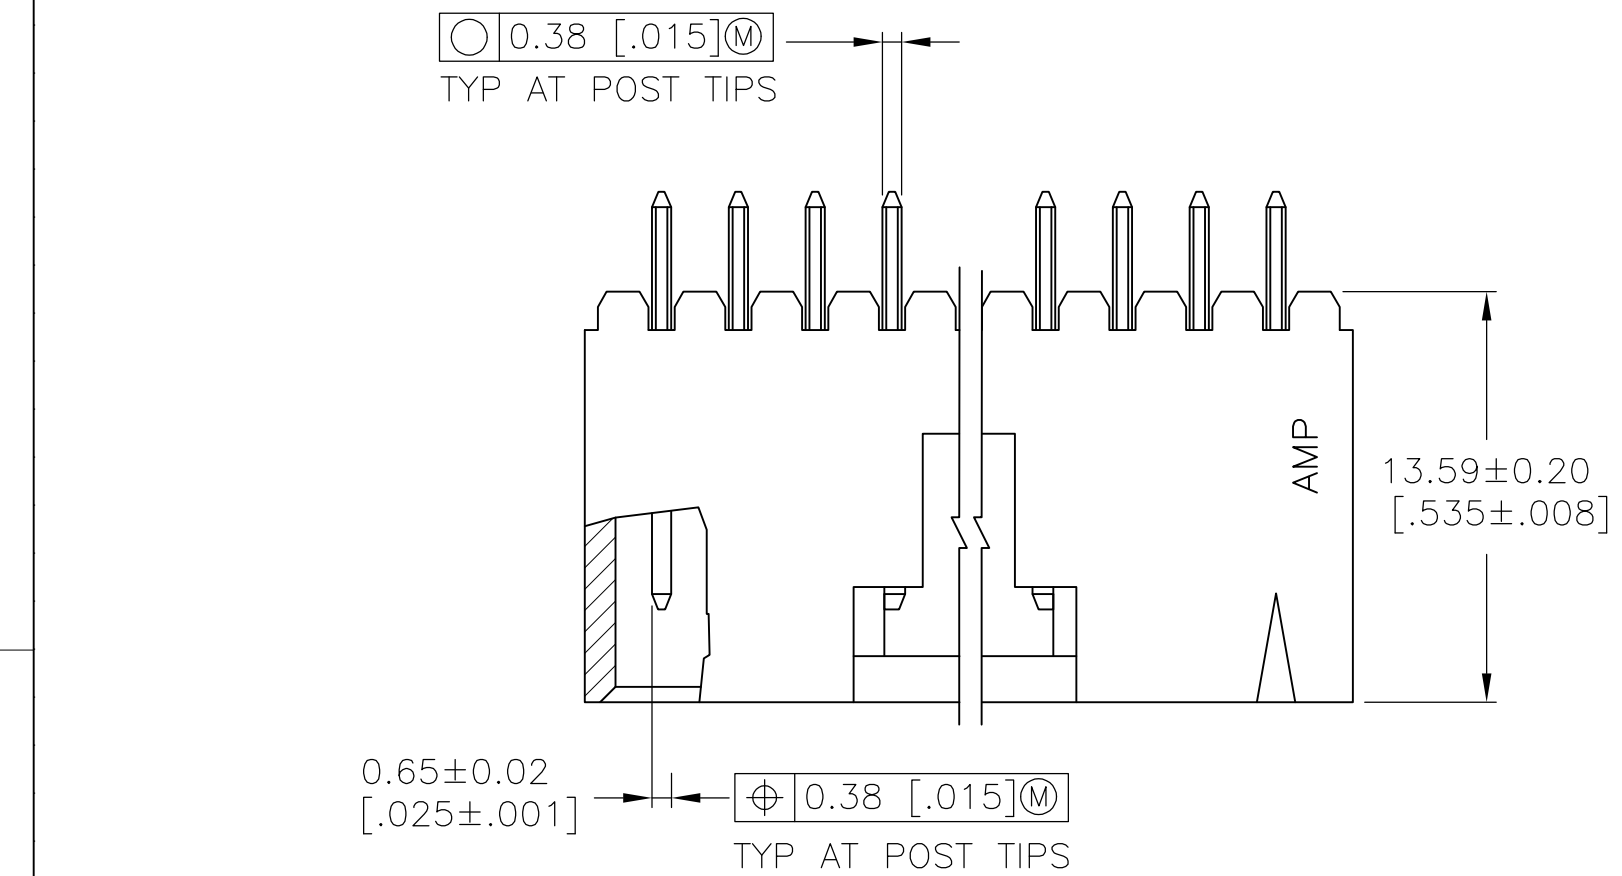

RECOMMENDED HOLE LAYOUT

- 1 .00076[.000030] GOLD IN THE CONTACT AREA, .00254[.000100] MATTE TIN-LEAD ON REMAINDER OF CONTACT, ALL OVER .00127[.000050] NICKEL.
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- 4 ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS. ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- 5 .00076[.000030] GOLD IN THE CONTACT AREA, .00254[.000100] MATTE TIN ON REMAINDER OF CONTACT, ALL OVER .00127[.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION
- 7 STANDOFFS NOT PRESENT ON UNDERSIDE OF ASSEMBLY
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

		6	1	64.01 [2.520]	65.91 [2.595]	24	25	2-103735-4
8	OBSOLETE	6	1	61.47 [2.420]	63.37 [2.495]	23	24	-2-103735-3
8	OBSOLETE	6	1	58.93 [2.320]	60.83 [2.395]	22	23	-2-103735-2
8	OBSOLETE	6	1	56.39 [2.220]	58.29 [2.295]	21	22	-2-103735-1
8	OBSOLETE	6	1	53.85 [2.120]	55.75 [2.195]	20	21	-2-103735-0
		6	1	51.31 [2.020]	53.21 [2.095]	19	20	1-103735-9
8	OBSOLETE	6	1	48.77 [1.920]	50.67 [1.995]	18	19	-1-103735-8
		6	1	46.23 [1.820]	48.13 [1.895]	17	18	1-103735-7
		6	1	43.69 [1.720]	45.59 [1.795]	16	17	1-103735-6
		6	1	41.15 [1.620]	43.05 [1.695]	15	16	1-103735-5
		6	1	38.61 [1.520]	40.51 [1.595]	14	15	1-103735-4
		6	1	36.07 [1.420]	37.97 [1.495]	13	14	1-103735-3
		6	1	33.53 [1.320]	35.43 [1.395]	12	13	1-103735-2
		6	1	30.99 [1.220]	32.89 [1.295]	11	12	1-103735-1
		6	1	28.45 [1.120]	30.35 [1.195]	10	11	1-103735-0
		6	1	25.91 [1.020]	27.81 [1.095]	9	10	103735-9
		6	1	23.37 [0.920]	25.27 [0.995]	8	9	103735-8
		6	1	20.83 [0.820]	22.73 [0.895]	7	8	103735-7
		6	1	18.29 [0.720]	20.19 [0.795]	6	7	103735-6
		6	1	15.75 [0.620]	17.65 [0.695]	5	6	103735-5
		6	1	13.21 [0.520]	15.11 [0.595]	4	5	103735-4
		6	1	10.67 [0.420]	12.57 [0.495]	3	4	103735-3
		6	1	8.13 [0.320]	10.03 [0.395]	2	3	103735-2
		6	1	5.59 [0.220]	7.49 [0.295]	1	2	103735-1

REMARKS		PLATING		C	B	A	NO. OF POSN		PART NO.										
THIS DRAWING IS A CONTROLLED DOCUMENT.							DWN S. SHUEY 3-5-91		 TE Connectivity										
DIMENSIONS:							CHK L. CASTAGNA 3-27-91												
mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:					APVD L. CASTAGNA 3-27-91				NAME								
		0 PLG ± - 1 PLG ± - 2 PLG ± 0.13[.005] 3 PLG ± - 4 PLG ± - ANGLES ± -					PRODUCT SPEC				HDR ASSY, VERT, SINGLE ROW 2.54[.100] @ 0.64[.025] SQ POST, WITH PLZN & LATCHING, AMPMODU MTE								
MATERIAL		HOUSING: 1.5MM REINFORCED POLYCARBONATE CONTACTS: BRASS		FINISH		SEE TABLE		WEIGHT		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
								A1		00779		C=103735				—			
CUSTOMER DRAWING										SCALE		4:1		SHEET		1 OF 2		REV	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-103735-4](#)