

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION



© COPYRIGHT

By


ALL RIGHTS RESERVED

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	P5	REVISED PER ECO-16-012733	01SEP2016	NK	MM

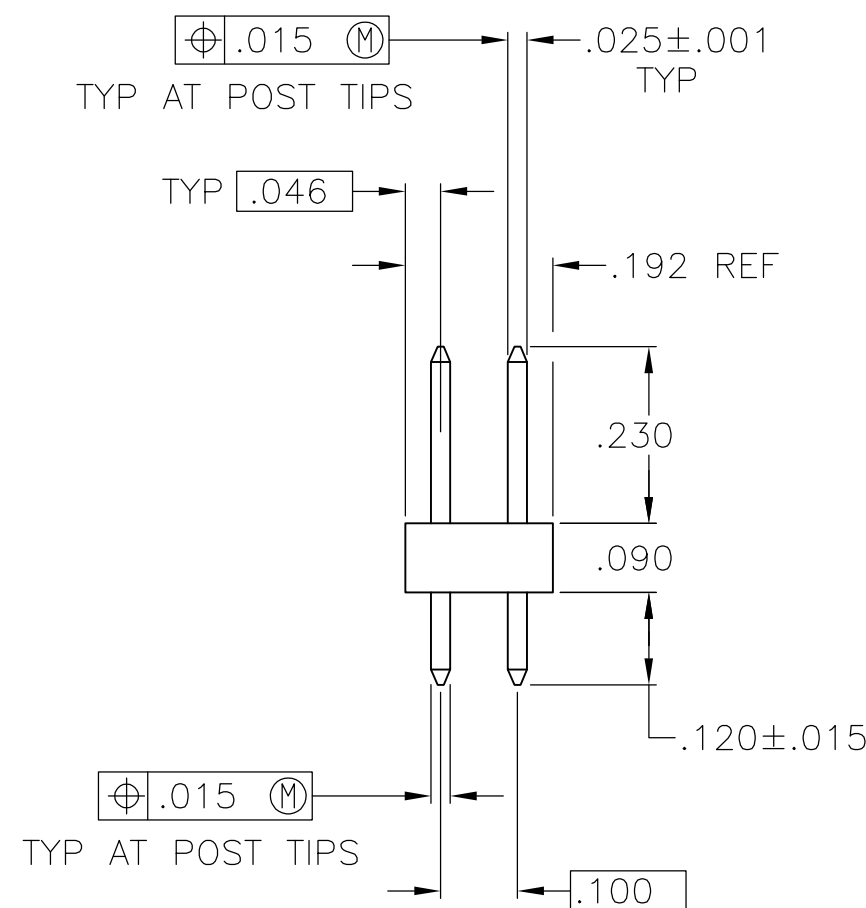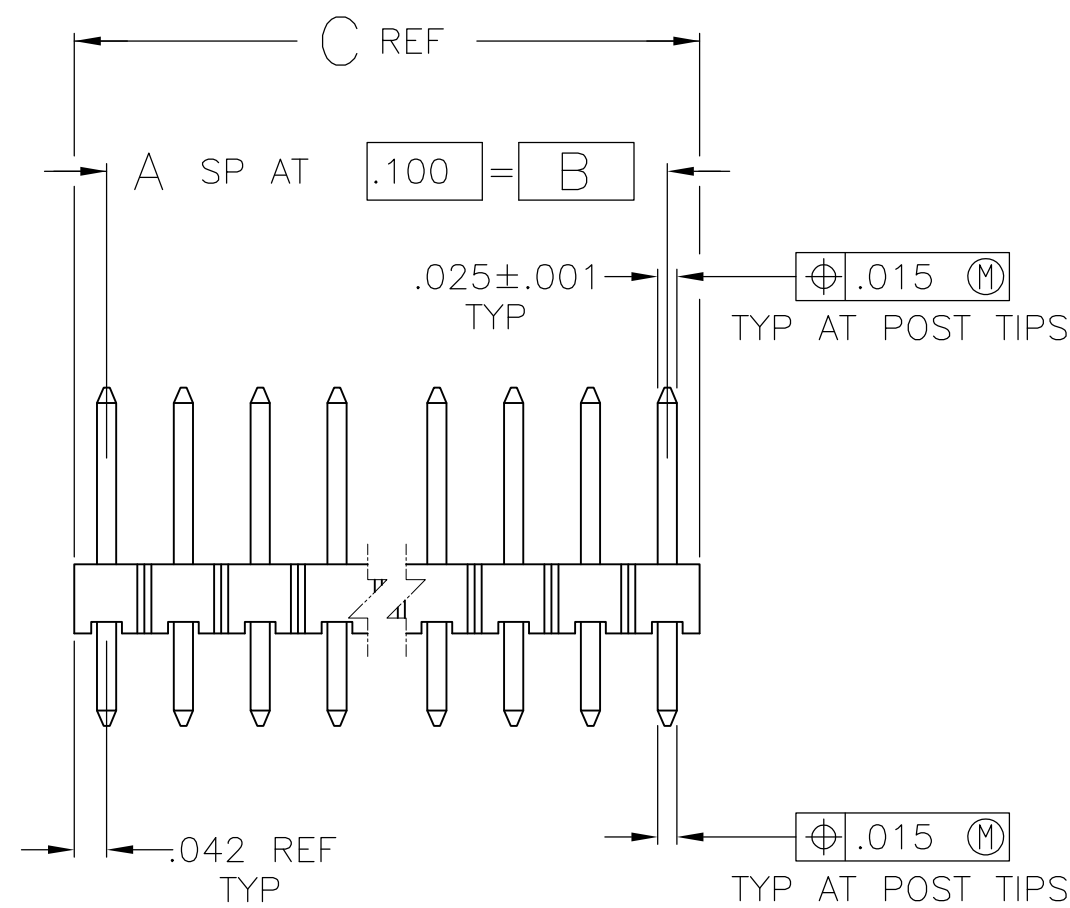

- | | |
|---|--|
| 1 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD. |
| 2 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS. |
| 3 | .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL. |
| 4 | .000100-.000200 BRIGHT TIN OVER .000050 NICKEL. |
| 5 | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION. |
| 6 | HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. |
| 7 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

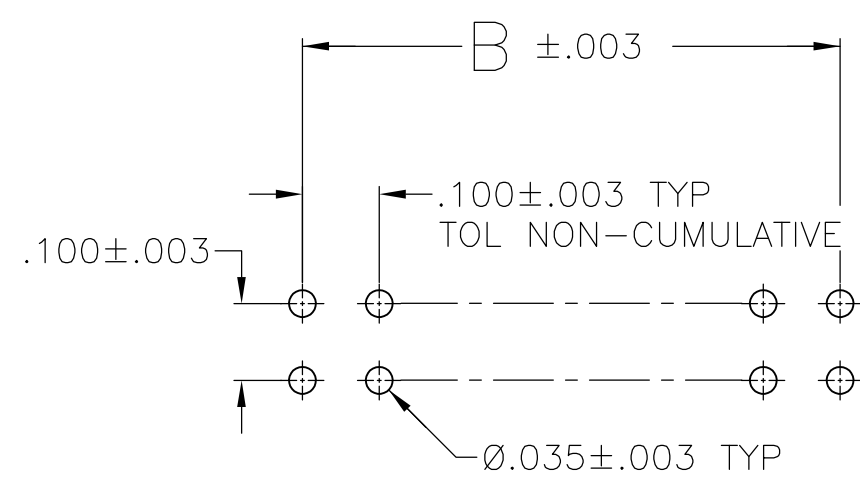

RECOMMENDED HOLE LAYOUT

	5	4	1.684	1.600	16	34	4-103328-9
	5	4	1.284	1.200	12	26	4-103328-8
		4	.884	.800	8	18	4-103328-7
△	OBSOLETE	4	.584	.500	5	12	4-103328-6
	5	4	3.984	3.900	39	80	4-103328-5
		4	.984	.900	9	20	4-103328-4
		4	.684	.600	6	14	4-103328-3
		4	.284	.200	2	6	4-103328-2
		4	.084	—	—	2	4-103328-1
		5	3.984	3.900	39	80	4-103328-0
△	OBSOLETE	5	3.884	3.800	38	78	3-103328-9
△	OBSOLETE	5	3.784	3.700	37	76	3-103328-8
△	OBSOLETE	5	3.684	3.600	36	74	3-103328-7
△	OBSOLETE	5	3.584	3.500	35	72	3-103328-6
		5	3.484	3.400	34	70	3-103328-5
△	OBSOLETE	5	3.384	3.300	33	68	3-103328-4
△	OBSOLETE	5	3.284	3.200	32	66	3-103328-3
△	OBSOLETE	5	3.184	3.100	31	64	3-103328-2
△	OBSOLETE	5	3.084	3.000	30	62	3-103328-1
△	OBSOLETE	5	2.984	2.900	29	60	3-103328-0
△	OBSOLETE	5	2.884	2.800	28	58	2-103328-9
△	OBSOLETE	5	2.784	2.700	27	56	2-103328-8
△	OBSOLETE	5	2.684	2.600	26	54	2-103328-7
△	OBSOLETE	5	2.584	2.500	25	52	2-103328-6
		5	2.484	2.400	24	50	2-103328-5
△	OBSOLETE	5	2.384	2.300	23	48	2-103328-4
△	OBSOLETE	5	2.284	2.200	22	46	2-103328-3
△	OBSOLETE	5	2.184	2.100	21	44	2-103328-2
△	OBSOLETE	5	2.084	2.000	20	42	2-103328-1
		5	1.984	1.900	19	40	2-103328-0
△	OBSOLETE	5	1.884	1.800	18	38	1-103328-9
△	OBSOLETE	5	1.784	1.700	17	36	1-103328-8
		5	1.684	1.600	16	34	1-103328-7
		5	1.584	1.500	15	32	1-103328-6
△	OBSOLETE	5	1.484	1.400	14	30	1-103328-5
		5	1.384	1.300	13	28	1-103328-4
		5	1.284	1.200	12	26	1-103328-3
		5	1.184	1.100	11	24	1-103328-2
△	SUPERSEDED BY 6-146254-1	5	1.084	1.000	10	22	1-103328-1
		5	.984	.900	9	20	1-103328-0
		5	.884	.800	8	18	103328-9
		5	.784	.700	7	16	103328-8
		5	.684	.600	6	14	103328-7
		5	.584	.500	5	12	103328-6
		5	.484	.400	4	10	103328-5
		5	.384	.300	3	8	103328-4
		5	.284	.200	2	6	103328-3
		5	.184	.100	1	4	103328-2
		5	.084	—	—	2	103328-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN MARTINELLI 10/15/92		 TE Connectivity	
		CHK JOHN KNITTLE 23NOV92			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		FINISH 0 P L C ± 1 P L C ± 2 P L C ± 3 P L C ±.005 4 P L C ± ANGLES ± ±		APD B. FLINCHBAUGH 23NOV92	
		PRODUCT SPEC		ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW. .100 X .100 C/L, VERTICAL, WITH .025 SQUARE POSTS	
		APPLICATION SPEC			
		WEIGHT			
MATERIAL POST: COPPER ALLOY		SEE TABLE		SIZE A1	
		CUSTOMER DRAWING		DRAWING NO 00779	
				SCALE 4:1	
				SHEET 1 of 1	
				REV P5	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-103328-0](#)