
	4	3		2	1
ROLECTION C-917706			26.5 Litti intri intri intri intri intri intri intri <u>hv-Ky-2</u> TRADE MARK (24.3)		
METRIC MEILE	-				
	· .				
ONS IN MM. DO NOT SCALE PRINT	注記: 1. 道用製品規格: 108-5459 2. 道用製品型器:表1本型 3. 表2本型 NOTES: 1. PRODUCT SPEC.: 108-5459 2. APPLICABLE CONN. P/N; SEE TABLE 1 3. SEE TABLE2		キャップハウジング CAP HOUSING ブラクハウジング PLUG HOUSING 適用製品 APPLICABLE PRODUC	10 316094 10 917694 10 917694 在 型 番 (Pos.) (P/N) 衰1 TABLE 1	
PRINT DIST	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	日 安更 八 変更 〇 作成 LTR 夏夏 (REVISION	日本エー 日本エー 第合電源重要 (1) 「12:87 「新設:-se N.N 」「12:87 村料 (MATERIAL 金々 Millies 5687:-se A.O Y.K 5:78 648 Millies 0R. 24 MA OR. 24 MA Y.NO	ALL RIG WIRE RANGE: WERE (INSULATION DI/ *(AWG -) 0.93-1.8 m L1 HIRE RANGE: ALL RIG *(AWG -) 0.93-1.8 m L1 HIRE RANGE: ALL RIG *(AWG -) 0.93-1.8 m L1 HIRE RANGE: ALL RIG ALL RIG	11 1000000 2.5mm

AMP-J010-2C REV.3/193

.

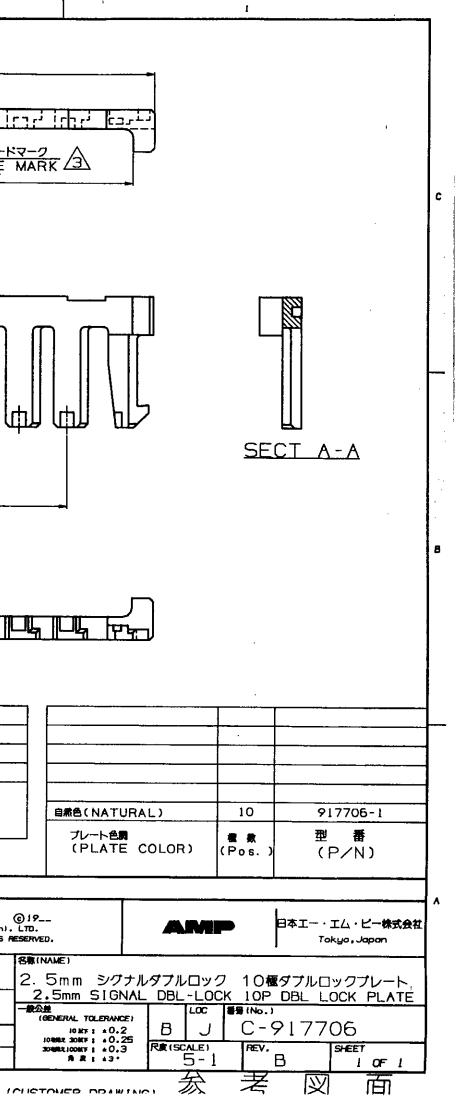

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 917706-1