
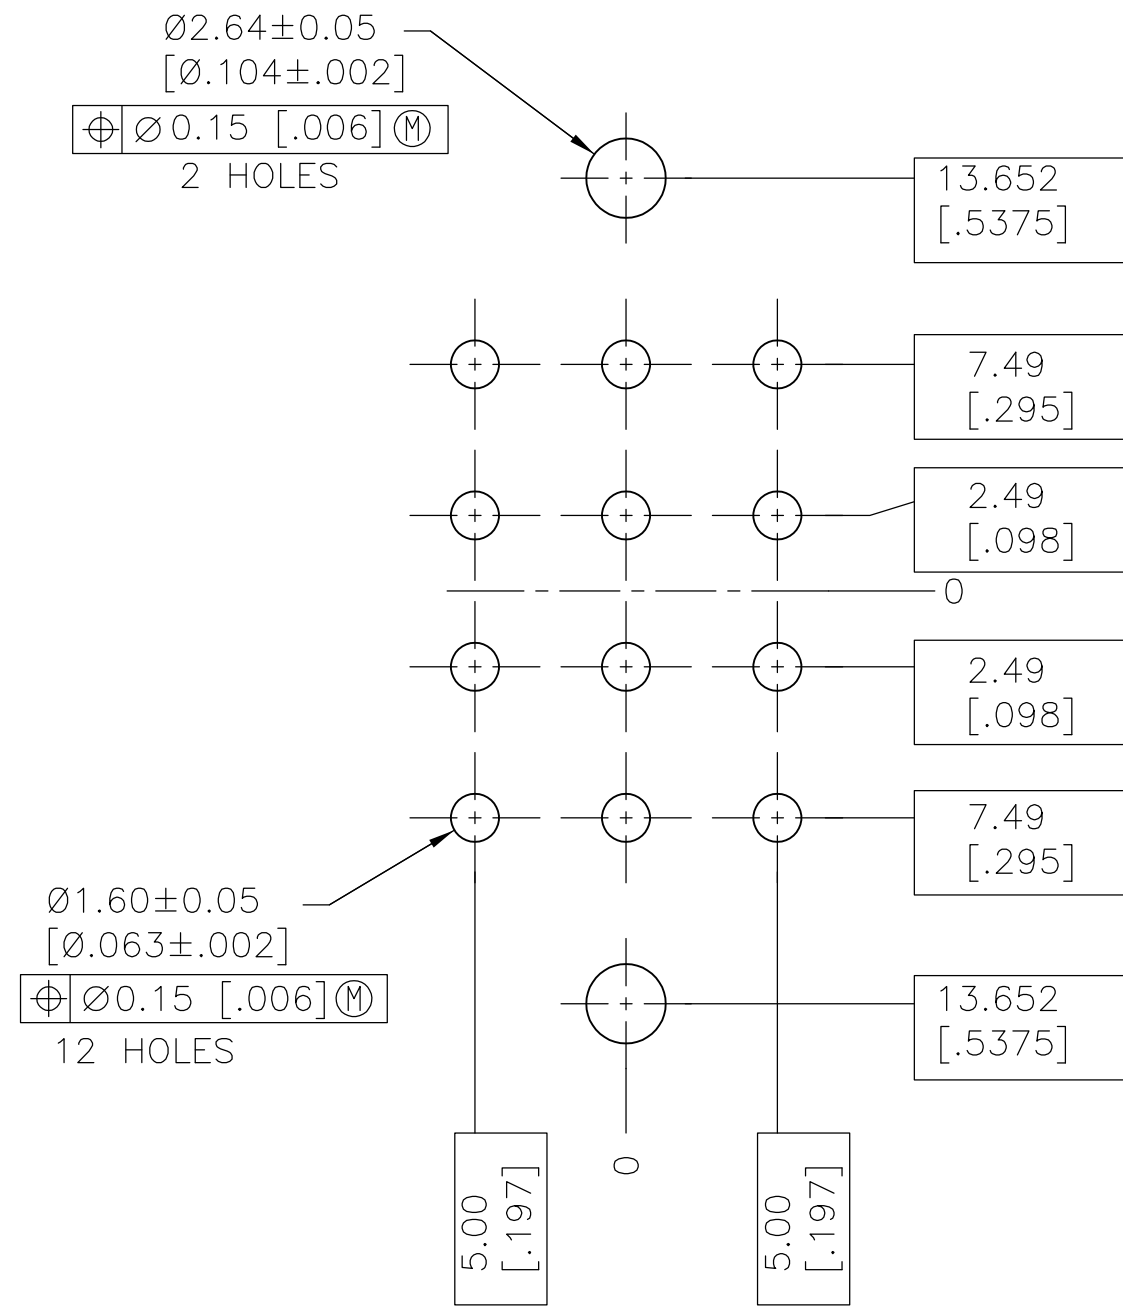
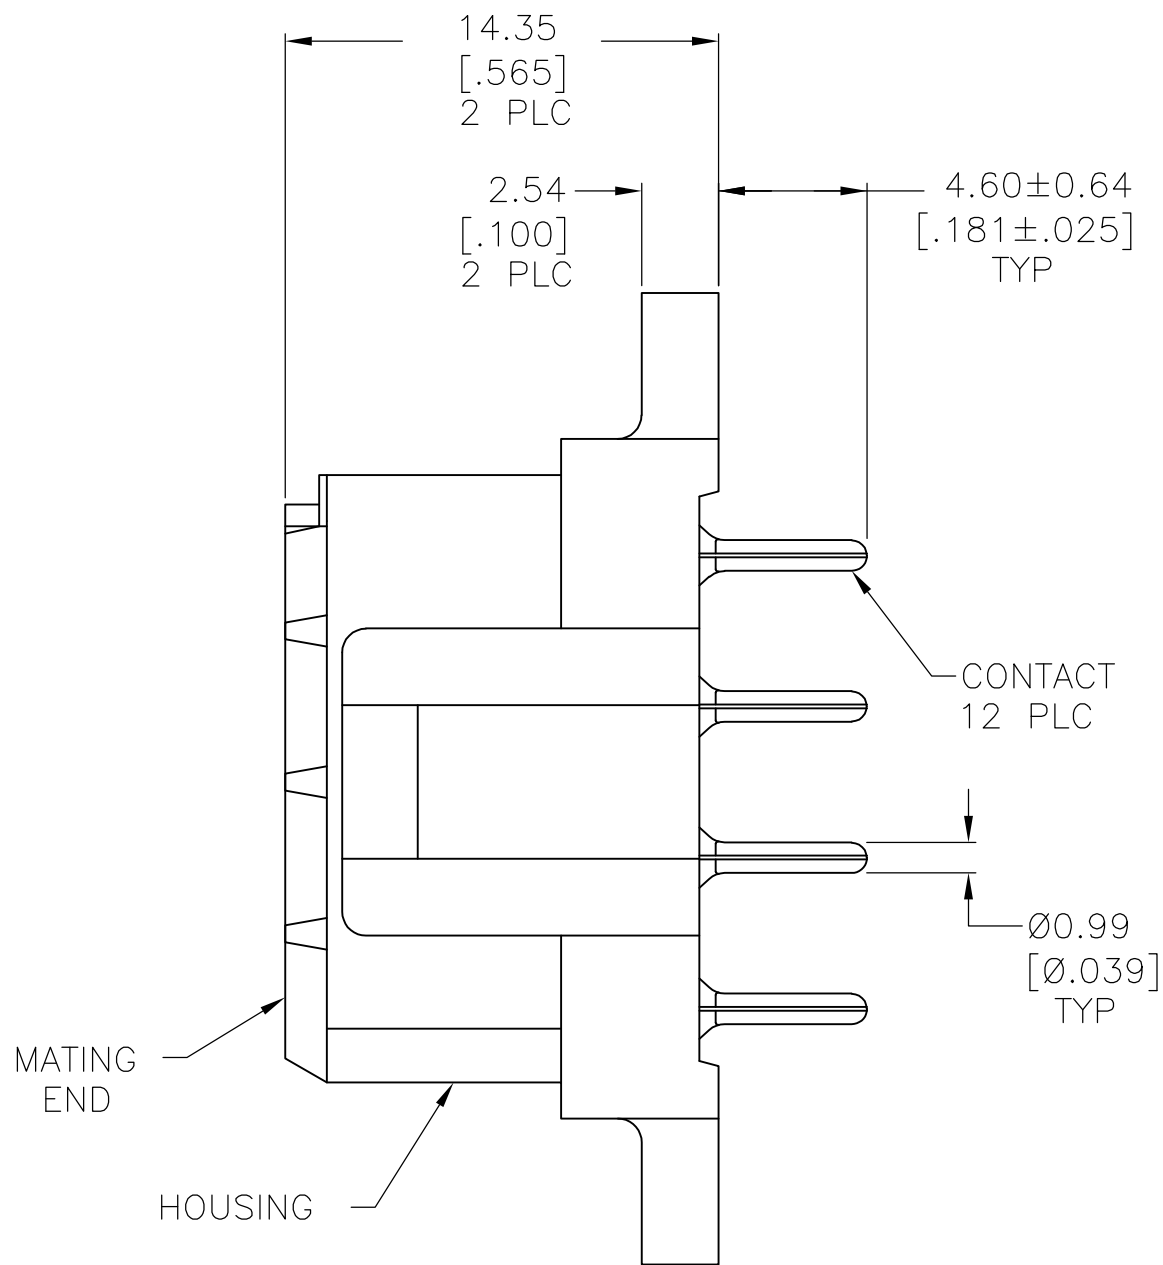


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	REVISED PER ECO-16-004940	06AUG2016	NK	MZ

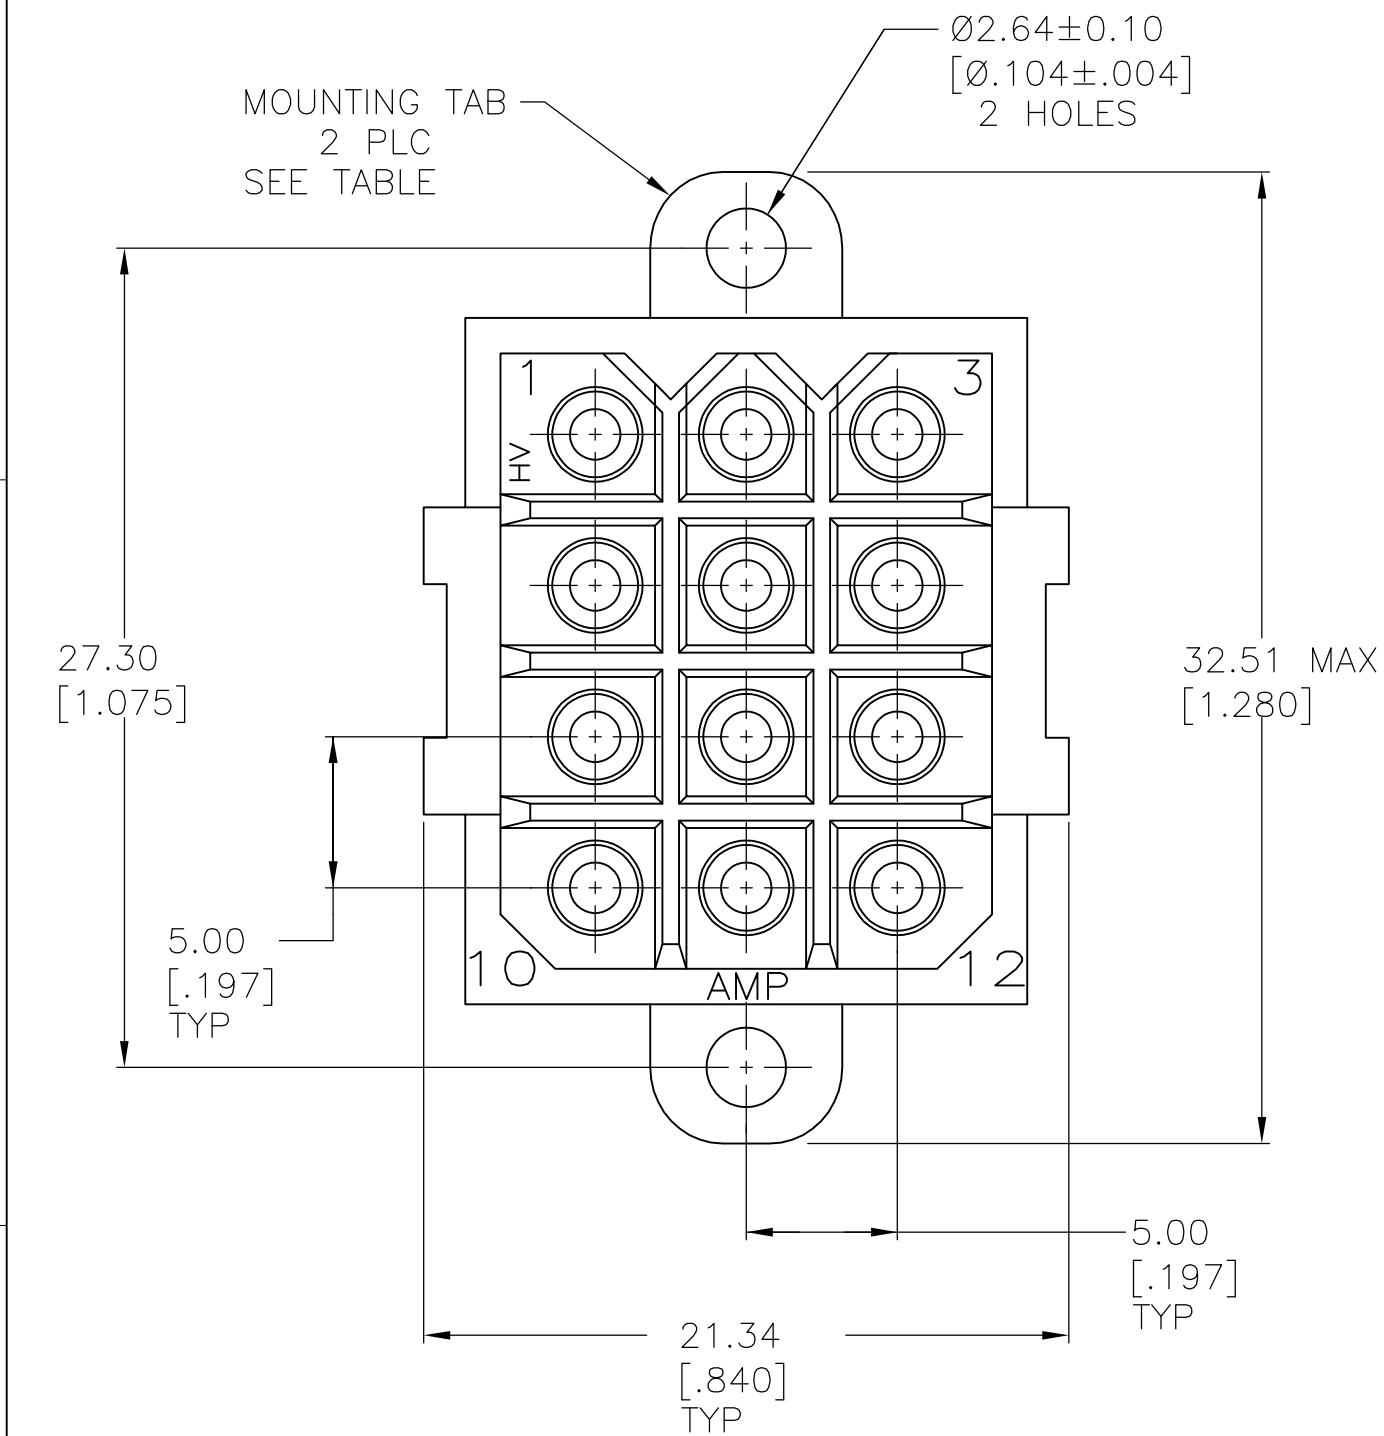

RECOMMENDED LAYOUT

- ① NYLON, UL 94-VO RATED, RED.
- ② PHOSPHOR BRONZE.
- ③ 3.81 μ m [.000150] MIN TIN-LEAD OVER 1.27 μ m [.000050] MIN NICKEL.
- ④ 0.76 μ m [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81 μ m [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
- ⑤ .000150 MIN TIN OVER .000050 MIN NICKEL.
- ⑥ 0.76 μ m [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81 μ m [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.

OBSOLETE	⑥	NO	1-207528-0
	⑥	YES	207528-9
	⑤	NO	207528-8
	⑤	YES	207528-7
	④	NO	207528-4
	④	YES	207528-3
	③	NO	-207528-2-
	③	YES	207528-1
CONTACT FINISH		MOUNTING TABS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/19/92	TE Connectivity	
DIMENSIONS: INCHES		CHK	3-25-92		
		APVD	3-25-92	NAME	
		PRODUCT SPEC	108-10033	SOCKET HEADER ASSEMBLY, 12 POSITION, METRIMATE	
MATERIAL		APPLICATION SPEC	—	SIZE	CAGE CODE
HOUSING: 1		FINISH	WEIGHT	A2	00779
CONTACT: SEE TABLE		CUSTOMER DRAWING	SCALE	4:1	SHEET
				1 of 1	REV
				M	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207528-9](#)