


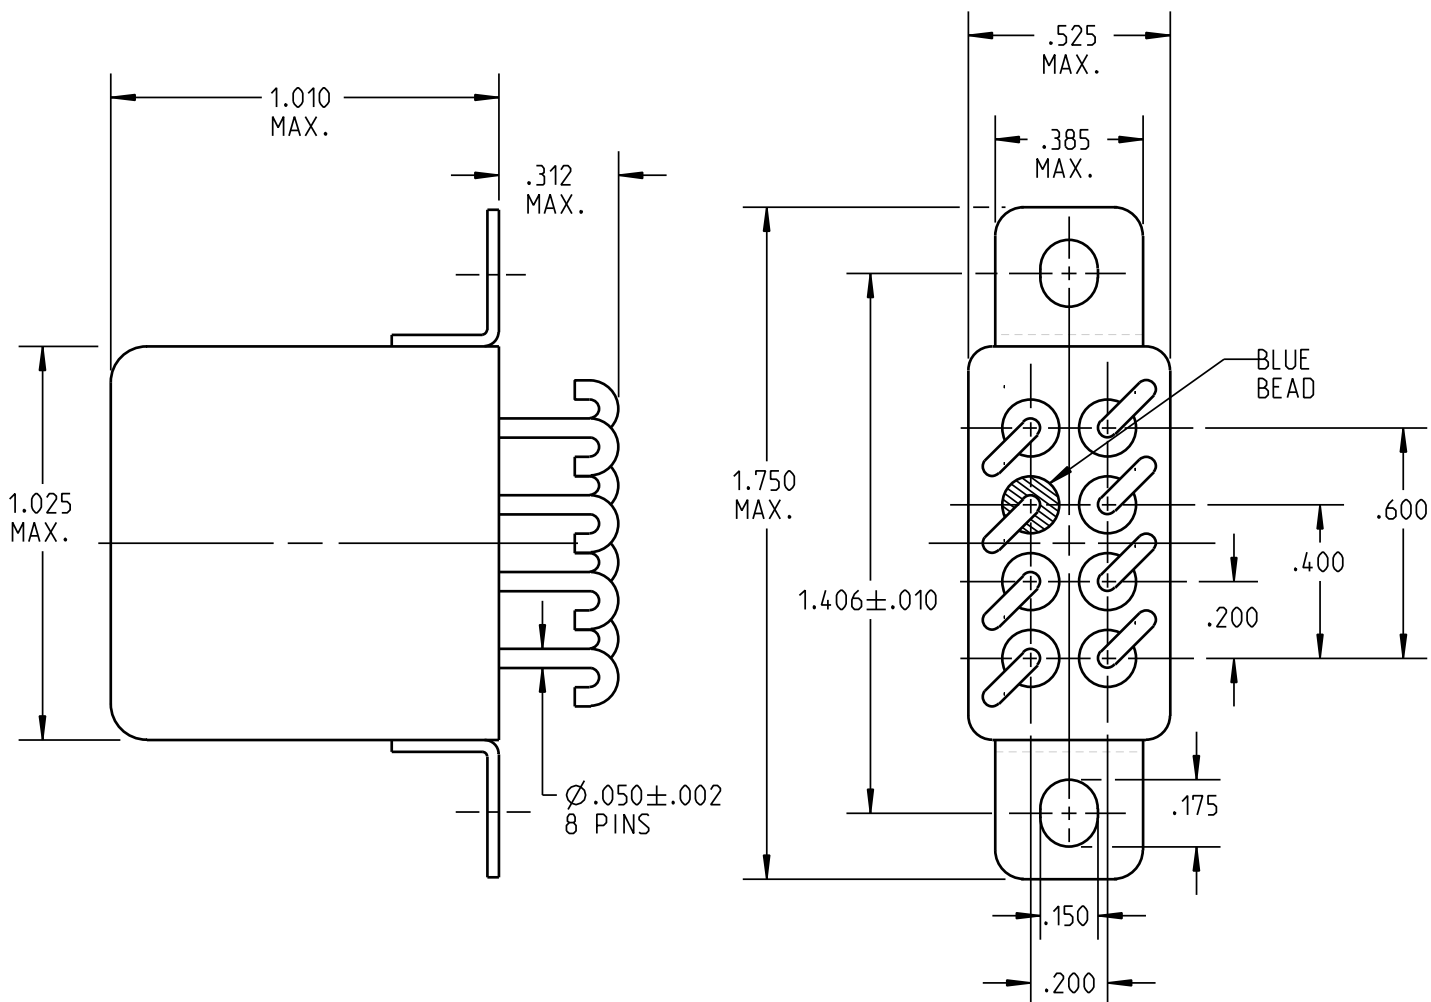


REV.4
DCO 144148

COIL: @ 25°C
 RESISTANCE 170 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 18.0 VDC
 MUST OPERATE 9.7 VDC
 MUST RELEASE 1.15 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE & RELEASE 15 MS MAX.
 OPERATE BOUNCE 5 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

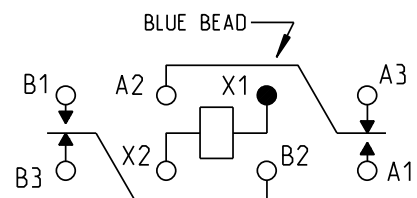

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
 5 AMPS 115 VAC/400 Hz RESISTIVE
 50,000 OPERATIONS

DR. R.B. 11/11/91

CK. J.M.B. 1/24/06

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M5757/23-038 REV.

"07" RELAY

B07D932BZ2-0354

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07D932BZ2-0354](#)