



Certifications & Ratings

- RoHS compliant

Application

The 606 Series LED Panel Mount Indicators are designed for a variety of applications such as:

- Main power indication
 - Remote power indication
 - Status indication
 - Maintenance and warning indication
 - Instrumentation
- ... and many more!

Dimensions

inches [mm]

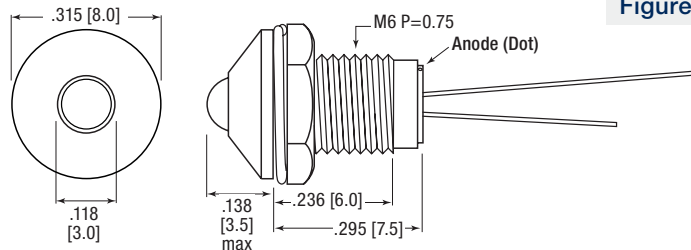


Figure 1

Mechanical Information

Mounting Hole Size:	0.244" (6.2 mm)
Max Panel Thickness:	0.138" (3.5 mm)
Mounting Torque:	0.362 lbs/ft (5 kg/cm) torque

Specifications

Voltage Options:	2 VDC (resistor required) 6 and 12 VDC / bi-color (no resistor required)
Operating temp:	-25 °C to +85 °C (-13 °F to +185 °F)
Storage Temp:	-25 °C to +100 °C (-13 °F to +212 °F)
Electrical Connection:	Through hole and 24 AWG wire leads (bi-color only)
Housing:	Brass—Chrome Plated
Terminals:	Copper—Nickel Plated
Wire Leads:	6" on bi-color only
Lock washer:	Iron—Nickel Plated
Nut:	Brass—Nickel Plated

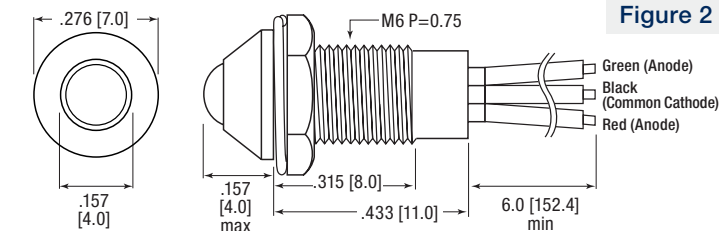


Figure 2

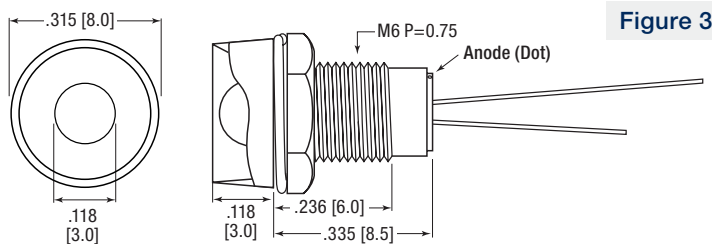


Figure 3

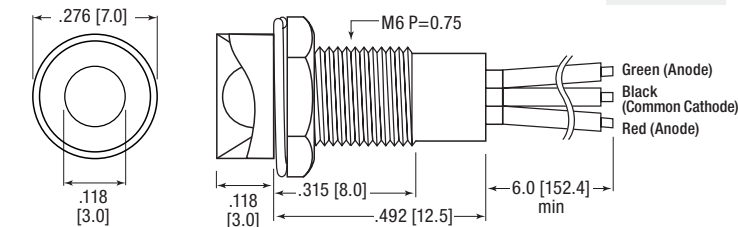


Figure 4

Ordering Information 606 Series

Part Number	Color	Voltage (V DC)	Current (mA)	Typical Intensity* (mcd)	LED Position	Finish	Figure
606-1111-110F	Red	2	5	8	Protruding	Chrome	1
606-1211-110F	Green		15	30			
606-1311-110F	Yellow			30			
606-1215-110F	Green			30			1 w/ Wire Leads
606-1415-110F	Red/Green	6	10	35/18	Protruding	Chrome	2
606-1415-120F	Red/Green			35/18			
606-1415-130F	Red/Green			35/18			
606-2111-110F	Red	2	5	8			Recess
606-2211-110F	Green		15	30			
606-2311-110F	Yellow			30			
606-2415-110F	Red/Green	6	10	35/18	Recess	Chrome	
606-2415-120F	Red/Green			35/18			
606-2415-130F	Red/Green			35/18			

*Bi-color intensity (Red/Green)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[606-1415-120F](#) [606-1415-110F](#) [606-1415-130F](#) [606-2311-110F](#) [606-2415-801F](#)