


REV. C  
DCO 300783

TOLERANCES  $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	95 OHMS $\pm 10\%$
NOMINAL VOLTAGE	12 VDC
MUST OPERATE	6.5 VDC MAX.
MUST RELEASE	3.3 VDC MAX., 0.75 VDC MIN.

CUSTOMER DATA SHEET

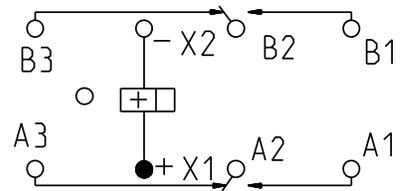

TERMINAL VIEW

ENVIRONMENT:

VIBRATION	70 Hz TO 3000 Hz @ 30 g's
SHOCK	200 g's 6 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C

NOTES: OPERATE, RELEASE 5 MS MAX.  
CONTACT STABILIZATION 2.5 MS MAX.  
CONTACT BOUNCE 1 MS MAX.

CONTACT RATING: LOW LEVEL  
TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,  
100,000 OPERATIONS

DR. B.D. 14MAR2008 CK. J.M.B. 3/17/08

**Tyco Electronics** ©COPYRIGHT 2005  
TYCO ELECTRONICS CORPORATION  
ALL INTERNATIONAL RIGHTS RESERVED

CUST. M83536/1-015M  
CUST. NO. REV.

TE NUMBER  
4-1617763-9

CII PART NUMBER  
FCB-205-0115M

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCB-205-0115M](#)