
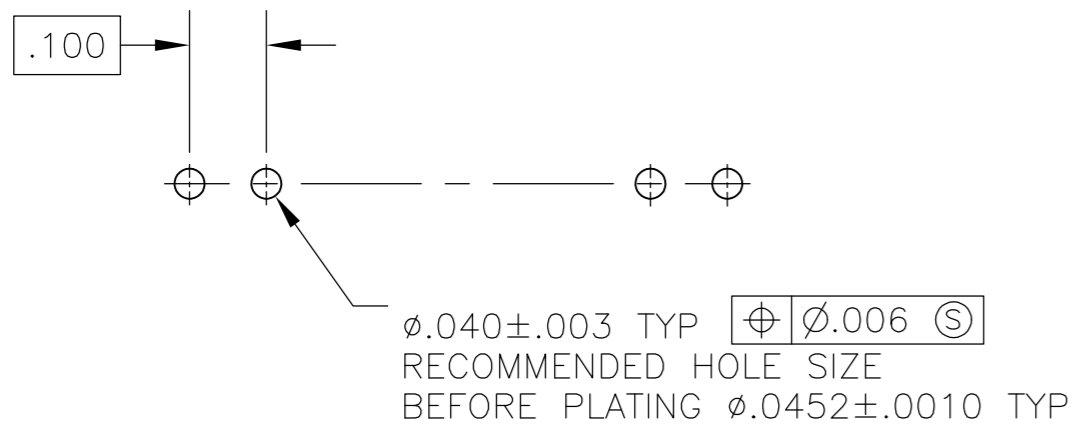


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		K		REVISED PER ECO-14-000066	27JUN2014	NK	MM

- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND THE HOUSING
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 4 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 5 M FOR KINKED TAILS
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

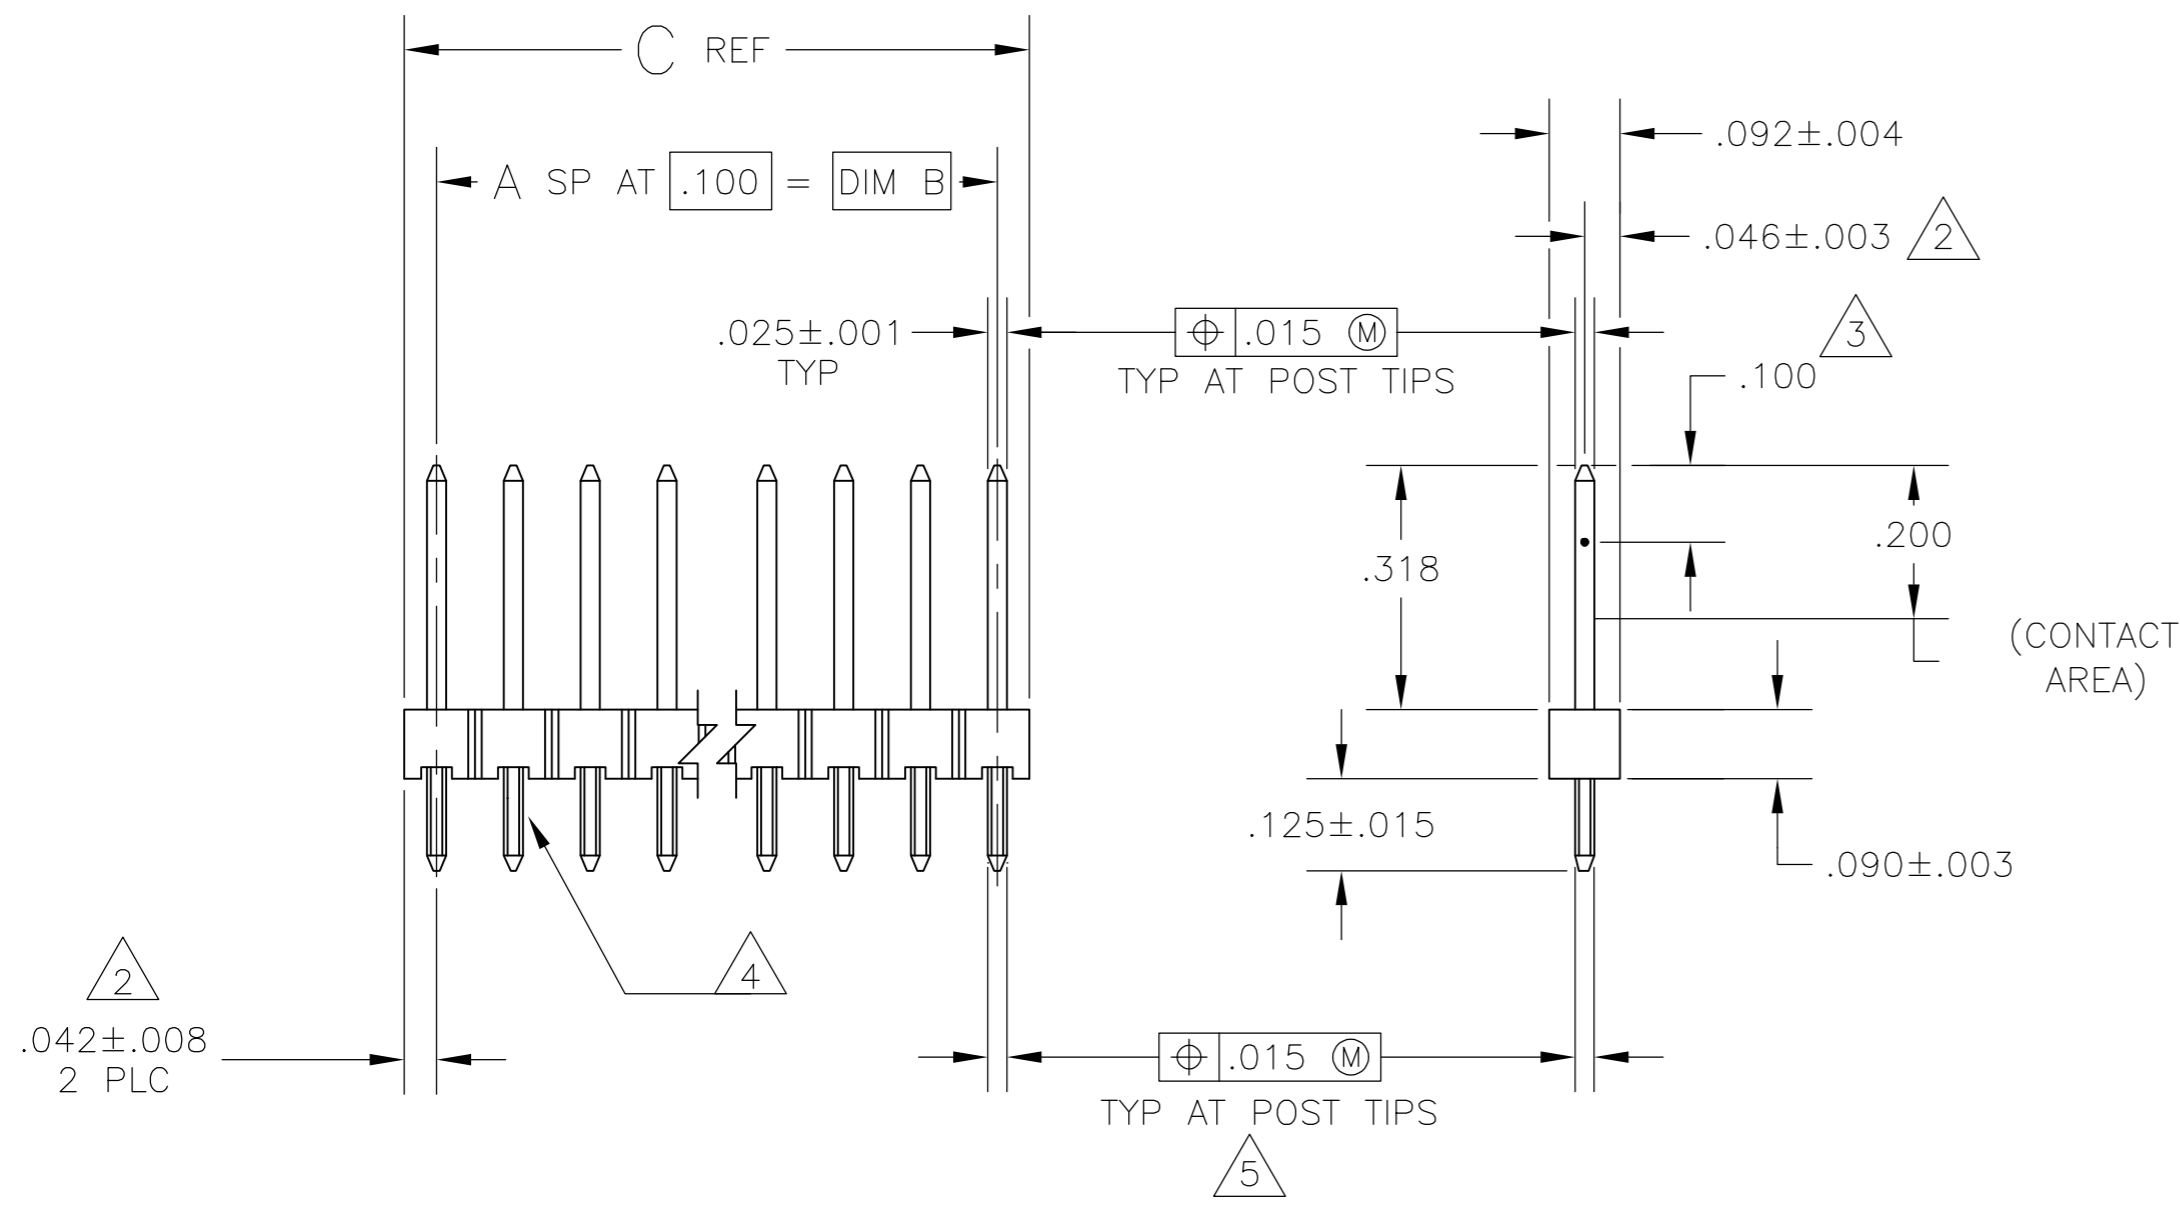

RECOMMENDED HOLE LAYOUT

6 OBSOLETE	3.984	3.900	39	40	2-104426-7
	3.484	3.400	34	35	2-104426-6
	2.984	2.900	29	30	2-104426-5
	2.584	2.500	25	26	2-104426-4
	2.484	2.400	24	25	2-104426-3
	2.384	2.300	23	24	2-104426-2
	2.284	2.200	22	23	2-104426-1
	2.184	2.100	21	22	2-104426-0
	2.084	2.000	20	21	1-104426-9
	1.984	1.900	19	20	1-104426-8
6 OBSOLETE	1.884	1.800	18	19	1-104426-7
	1.784	1.700	17	18	1-104426-6
	1.684	1.600	16	17	1-104426-5
	1.584	1.500	15	16	1-104426-4
	1.484	1.400	14	15	1-104426-3
	1.384	1.300	13	14	1-104426-2
	1.284	1.200	12	13	1-104426-1
	1.184	1.100	11	12	1-104426-0
	1.084	1.000	10	11	104426-9
	.984	.900	9	10	104426-8
6 OBSOLETE	.884	.800	8	9	104426-7
	.784	.700	7	8	104426-6
	.684	.600	6	7	104426-5
	.584	.500	5	6	104426-4
	.484	.400	4	5	104426-3
	.384	.300	3	4	104426-2
	.284	.200	2	3	104426-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H. MOLL	28JUN88	 TE Connectivity																	
DIMENSIONS: INCHES		CHK	R. FEIDT	28JUN88																		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R. FEIDT	28JUN88																		
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>.005</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-		1 PLC	±	-	2 PLC	±	-	3 PLC	±	.005	4 PLC	±	-	ANGLES	±	-	PRODUCT SPEC	
0 PLC	±	-																				
1 PLC	±	-																				
2 PLC	±	-																				
3 PLC	±	.005																				
4 PLC	±	-																				
ANGLES	±	-																				
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK POSTS: COPPER ALLOY		FINISH: POSTS: .00030 GOLD IN CONTACT AREA .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL	WEIGHT	-	NAME: HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL VERT, 025 SQ POSTS, WITH RETENTION FEATURE SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=104426 RESTRICTED TO: - SCALE: 4:1 SHEET: 1 of 1 REV: K																	
CUSTOMER DRAWING																						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104426-2](#)