


CONFIGURATION	PART NUMBER	LENGTH
CONTROL POWER, MINI, 6-PIN/5-USED, MALE STRAIGHT	MN657AC07Mxxx	AS REQUESTED

DIMENSIONS

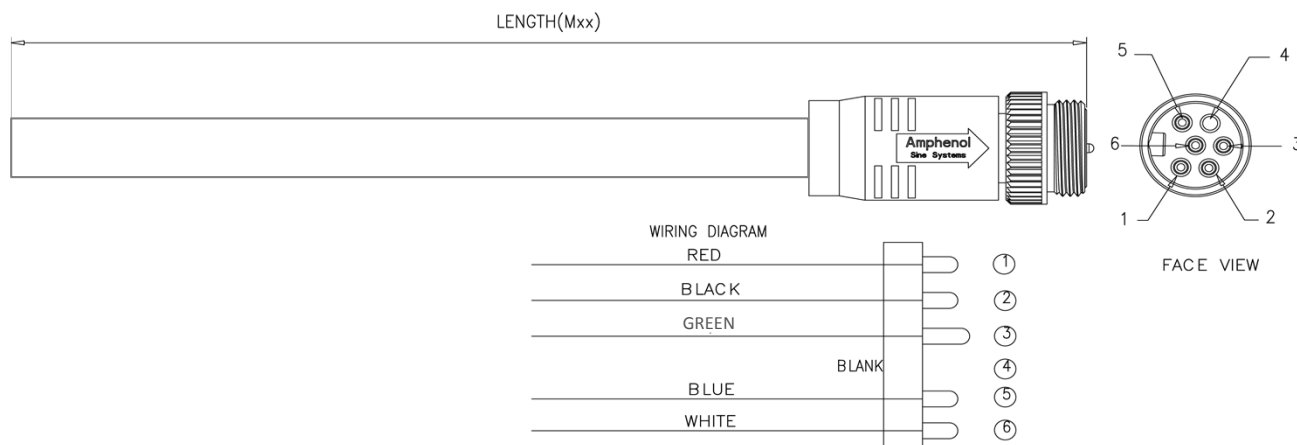

TECHNICAL DATA

TEMPERATURE RANGE:	-20C to +90C
PROTECTION:	IP 67, NEMA 6P
BODY:	OIL RESISTANT PVC RED
CONTACTS:	COPPER ALLOY
CONTACT PLATING:	GOLD OVER NICKEL PLATING
CONNECTOR FACE:	PVC YELLOW
AMPERAGE:	10AMP
COUPLING NUTS:	MACHINED ALUMINUM, ANODIZED
CABLE CHARACTERISTICS:	UL TYPE TC 600V 90°C DRY 75°C WET, EXPOSED RUN (ER) OR MTW 600V 90°C OR STOOV 105°C 600V - CSA STOOV 600V FT2
APPROVALS:	UL, c(UL)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[MN657AC07M050](#)