

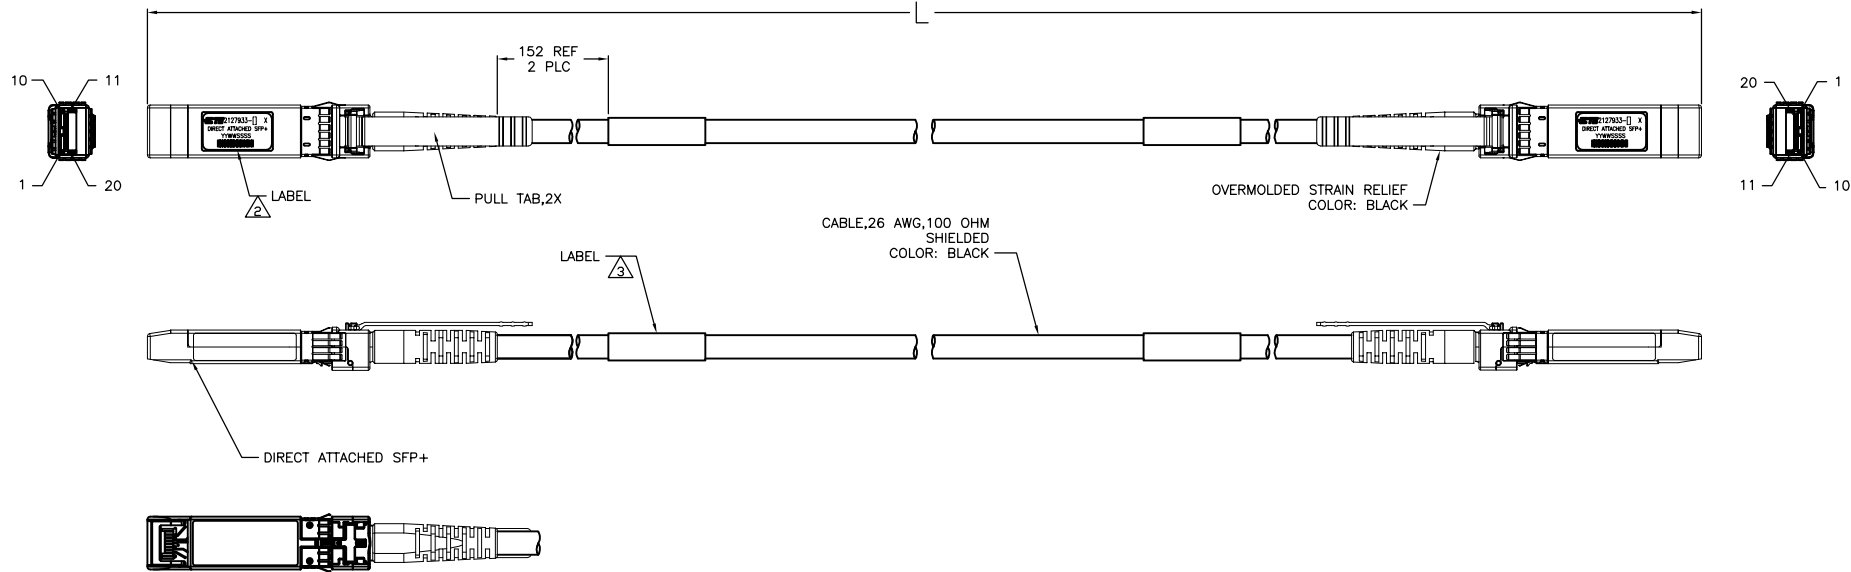
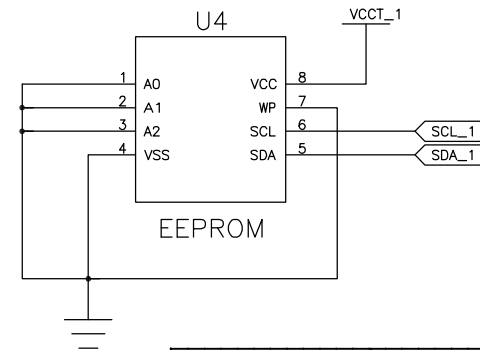


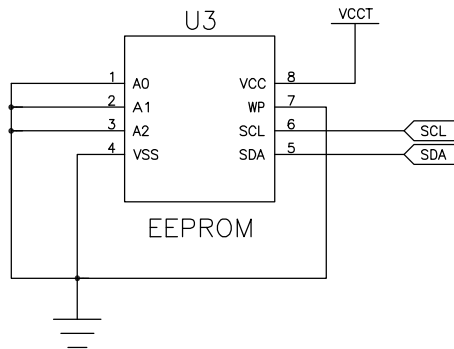

1. CHARACTERISTIC IMPEDANCE: 100±10 OHMS
(MEASURED DIFFERENTIALLY).
2. LABEL INFORMATION:
- CTE 2127933-[] X
DIRECT ATTACHED SFP+
YYWWSSSS
[Barcode]
- TE LOGO & PART NUMBER, X= MFG LOCATION
YYWW= DATE CODE SSSS= SERIAL NUMBER
BARCODE
3. LABEL INFORMATION:
- CTE
2127933-[]
YYWW
MADE IN []
- TE LOGO
TE PART NO
DATE CODE
COUNTRY OF ORIGIN
4. SEE SHEET 2 FOR WIRING SCHEMATIC.
5. ROHS COMPLIANCE: PRODUCT AND PROCESSING MEETS REQUIREMENTS OF
TYCO ELECTRONICS SPECIFICATION TEC-138-702.

6 +0.1 - 0	METERS	2127933-7
5 +0.1 - 0	METERS	2127933-6
4 +0.08 - 0	METERS	2127933-5
3 +0.08 - 0	METERS	2127933-4
2 +0.08 - 0	METERS	2127933-3
1 +0.05 - 0	METERS	2127933-2
0.5 +0.05 - 0	METERS	2127933-1
L		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRG T. SMITH 18M42010	TE Connectivity	
DIMENSIONS:		CHK C. ADAMS 18M42010	NAME	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		APPROV C. ADAMS 18M42010	CABLE ASSY, 26 AWG, SFP+ TO SFP+ NL_PLATED	
PRODUCT SPEC		APPLICATION SPEC		
MATERIAL		WEIGHT		
FINISH		SCALE		
CUSTOMER DRAWING		RESTRICTED TO		
SIZE		REV		
A1		00779 C-2127933		
SCALE		1:1		
SHEET		1 of 2		
REV		G		

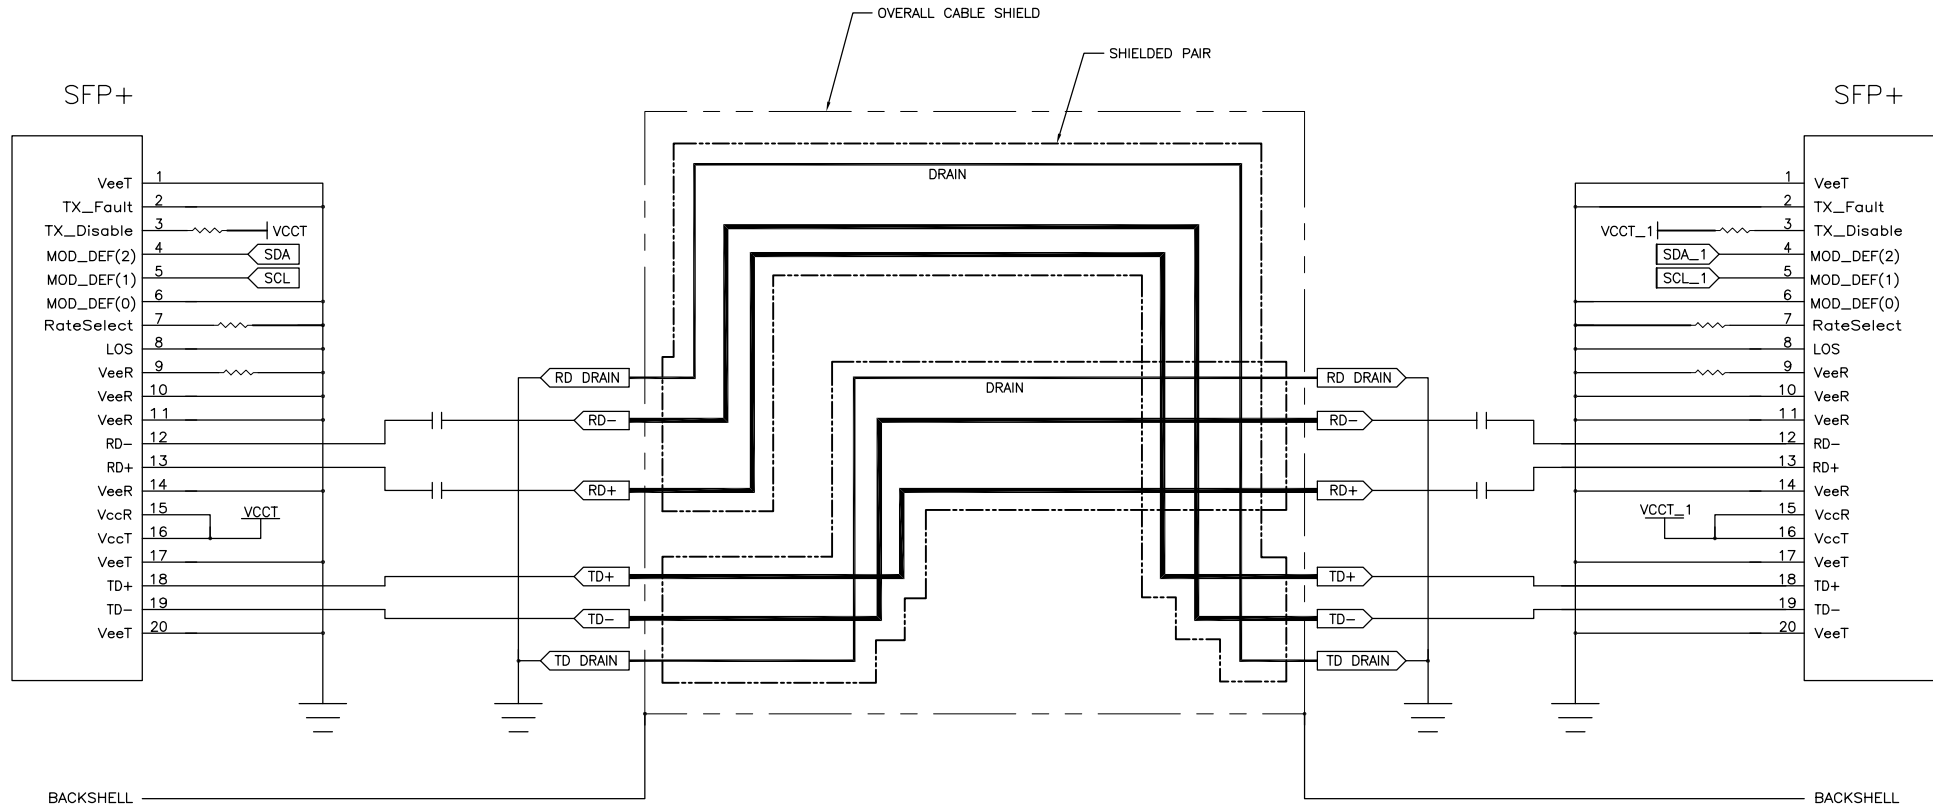

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2127933-5](#)