

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- - -

© COPYRIGHT - TE Connectivity

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HB

-

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REVISED PER ECO-11-005140	26MAR11	RK	HMR
	G	1.CHANGE TE LOTO2.ADD LINE IDENTIFICATIONS3.TERMINALS TOLERANCE CLARIFICATION ECO-12-005305	02-APR-12	YS.H	BH.Y

(G)

TE **c** **us** **®**

0SA-SS-224DM3 24V~

5A 50V~

3A 125V~/30V~

C

□□□□ □

OEG

●

PART B

PART A

LOT NO.

ONE CHARACTER FOR LINE IDENTIFICATION (G)

25±0.5

3.8±0.3

□0.45

0.3


0.5

24.4±0.5


1.95

15±0.5


2.45±0.2

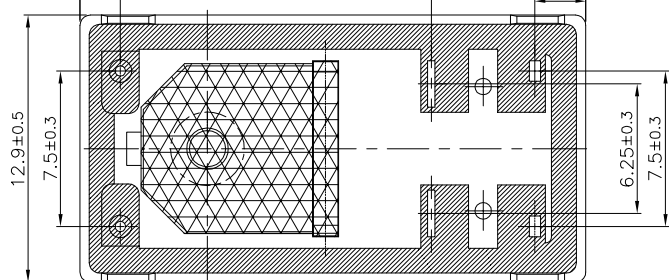

WIRING DIAGRAM(BOTTOM VIEW)

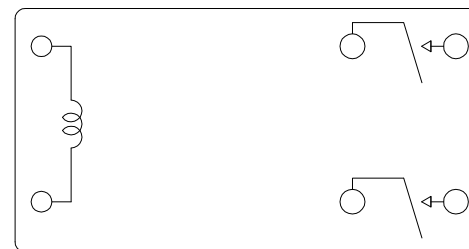

PC BOARD LAYOUT DIAGRAM(BOTTOM VIEW)

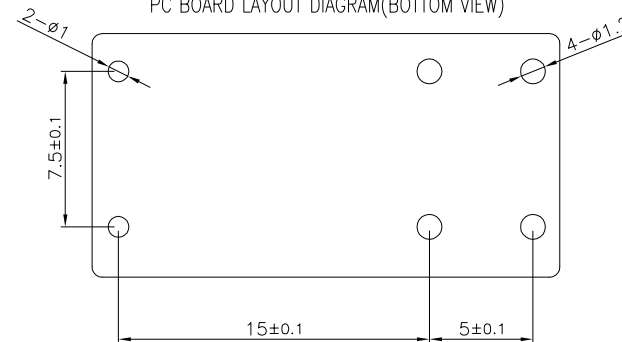

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

Huang.Yunshou

CHK

Yu.Banghua

APVD

Zhang.Sunny

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

TE

TE Connectivity

NAME

OSA-SH-2**DM3,000 CUSTOMER DWG

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779 ©=3-1419124-5

SCALE

4:1

SHEET

1 OF 2

REV

G

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT - By TE Connectivity	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

i	1461388-5	OSA-SH-248DM3	48V	OSA-SH-248DM3,000	107-79015(TRAY)
h	1461388-2	OSA-SH-206DM3	6V	OSA-SH-206DM3,000	107-79015(TRAY)
g	1461388-1	OSA-SH-205DM3	5V	OSA-SH-205DM3,000	107-79015(TRAY)
f	2-1440007-5	OSA-SH-224DM3	24V	OSA-SH-224DM3,000	107-79015(TRAY)
e	4-1419124-3	OSA-SH-224DM3	24V	OSA-SH-224DM3,000M	107-79016(TUBE)
d	8-1440001-3	OSA-SH-218DM3	18V	OSA-SH-218DM3,000	107-79015(TRAY)
c	3-1419124-5	OSA-SH-212DM3	12V	OSA-SH-212DM3,000	107-79015(TRAY)
b	3-1419124-6	OSA-SH-212DM3	12V	OSA-SH-212DM3,000M	107-79016(TUBE)
a	8-1440001-0	OSA-SH-209DM3	9V	OSA-SH-209DM3,000	107-79015(TRAY)
No.	PART NO.	PART A	PART B	TYPE NAME	PACKING SPEC

RELAY TYPE

NOTE:

- 1.TERMINAL DIMENSIONS WITHOUT TINNING.
- 2.LOT NO. SYSTEM AS FOLLOWING:



WEEK
YEAR

- ③ 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH, THICKNESS AND DIAMETER
+0.5mm FOR LENGTH

			EPOXY RESIN	SEAL	14
			POLYURETHANE Cu WIRE	MAGNETIC WIRE	13
UL 94V-0			PA66	CARD	12
UL 94V-0			PBT	CASE	11
UL 94V-0			PBT	BOBBIN	10
		SOLDER DIP	Cu Alloy	COIL TERMINAL	9
		SOLDER DIP	Cu Alloy	HINGE SPRING	8
			Ag Alloy	S-CONTACT	7
			Ag Alloy	C-CONTACT	6
		SOLDER DIP	Cu Alloy	M-TERMINAL	5
		SOLDER DIP	Cu Alloy	MOVABLE SPRING	4
		Ni PLATING	STEEL	CORE	3
		Ni PLATING	STEEL	ARMATURE	2
		Ni PLATING	STEEL	YOKE	1
INCOMBUSTIBILITY	NOTES	FINISH	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Huang.Yunshou	TE Connectivity		
DIMENSIONS: mm		CHK Yu.Banghua			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Zhang.Sunny	NAME		
		PRODUCT SPEC	OSA-SH-2**DM3,000 CUSTOMER DWG		
		APPLICATION SPEC	SIZE		
		WEIGHT	CAGE CODE		
MATERIAL	FINISH	DRAWING NO			RESTRICTED TO
		A300779			©=3-1419124-5
		CUSTOMER DRAWING			SCALE 4:1
		SHEET 2 OF 2			REV G

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.5mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1419124-5](#)