




BTA16-600SW3G, BTA16-800SW3G,

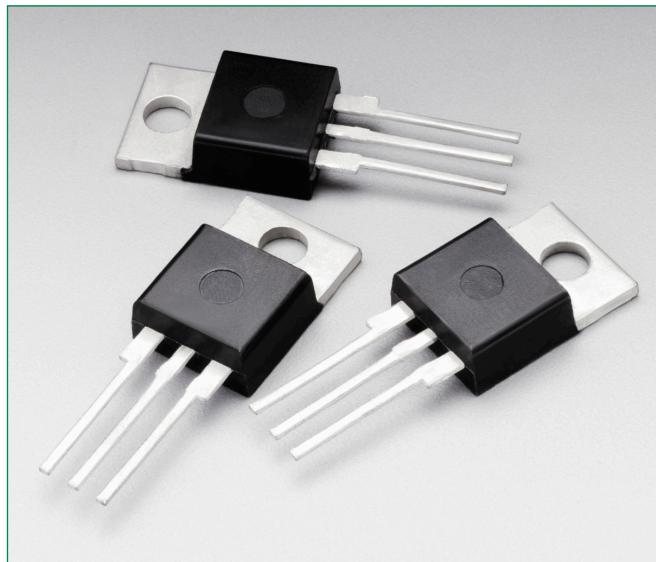


Description

Designed for high performance full-wave ac control applications where high noise immunity and high commutating di/dt are required.


Features

- Blocking Voltage to 800 V
- On-State Current Rating of 16 A RMS at 25°C
- Uniform Gate Trigger Currents in Three Quadrants
- High Immunity to dV/dt – 250 V/μs minimum at 110°C
- Minimizes Snubber Networks for Protection
- Industry Standard TO-220AB Package
- High Commutating dl/dt – 2 A/ms minimum at 110°C
- Internally Isolated (2500 V_{RMS})
- These Devices are Pb-Free

Pin Out

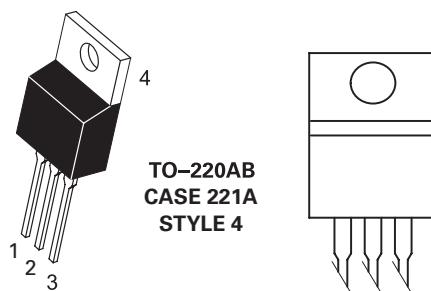

Functional Diagram



Additional Information

[Datasheet](#)[Resources](#)[Samples](#)

Maximum Ratings ($T_j = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Peak Repetitive Off-State Voltage (Note 1) (Gate Open, Sine Wave 50 to 60 Hz, $T_j = -40^\circ$ to 125°C) BTA16-600SW3G BTA16-800SW3G	V_{DRM} , V_{RRM}	600 800	V
On-State RMS Current (Full Cycle Sine Wave, 60 Hz, $T_c = 25^\circ\text{C}$)	$I_{T(RMS)}$	16	A
Peak Non-Repetitive Surge Current (One Full Cycle Sine Wave, 60 Hz, $T_c = 25^\circ\text{C}$)	I_{TSM}	170	A
Circuit Fusing Consideration ($t = 8.3$ ms)	I^2t	120	A^2sec
Non-Repetitive Surge Peak Off-State Voltage ($T_j = 25^\circ\text{C}$, $t = 8.3\text{ms}$)	V_{DSM}/V_{RSM}	V_{DSM}/V_{RSM} +100	V
Peak Gate Current ($T_j = 110^\circ\text{C}$, $t \leq 20$ μs)	I_{GM}	4.0	A
Peak Gate Power (Pulse Width ≤ 20 μs , $T_c = 80^\circ\text{C}$)	P_{GM}	20	W
Average Gate Power ($T_j = 125^\circ\text{C}$)	$P_{G(AV)}$	1.0	W
Operating Junction Temperature Range	T_j	-40 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to +125	$^\circ\text{C}$
RMS Isolation Voltage ($t = 300$ ms, R.H. $\leq 30\%$, $T_A = 25^\circ\text{C}$)	V_{iso}	2500	V

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

Thermal Characteristics

Rating	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case (AC)	R_{8JC}	2.13	$^\circ\text{C}/\text{W}$
Junction-to-Ambient	R_{8JA}	60	$^\circ\text{C}/\text{W}$
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds	T_L	260	$^\circ\text{C}$

Electrical Characteristics - OFF ($T_J = 25^\circ\text{C}$ unless otherwise noted ; Electricals apply in both directions)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak Repetitive Blocking Current ($V_D = V_{DRM} = V_{RRM}$; Gate Open)	I_{DRM}	-	-	0.005	mA
	I_{RRM}	-	-	2.0	

Electrical Characteristics - ON ($T_J = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

Characteristic	Symbol	Min	Typ	Max	Unit
Forward On-State Voltage (Note 2) ($I_{TM} = \pm 22.5 \text{ A Peak}$)	V_{TM}	-	-	1.55	V
Gate Trigger Current (Continuous dc) ($V_D = 12 \text{ V}$, $R_L = 30 \Omega$)	MT2(+), G(+)	2.0	-	10	mA
	MT2(+), G(-)	2.0	-	10	
	MT2(-), G(-)	2.0	-	10	
Holding Current ($V_D = 12 \text{ V}$, Gate Open, Initiating Current = $\pm 500 \text{ mA}$)	I_H	-	-	20	mA
Latching Current ($V_D = 12 \text{ V}$, $I_G = 12 \text{ mA}$)	MT2(+), G(+)	-	-	25	mA
	MT2(+), G(-)	-	-	30	
	MT2(-), G(-)	-	-	25	
Gate Trigger Voltage ($V_D = 12 \text{ V}$, $R_L = 30 \Omega$)	MT2(+), G(+)	0.5	-	1.3	V
	MT2(+), G(-)	0.5	-	1.3	
	MT2(-), G(-)	0.5	-	1.3	
Gate Non-Trigger Voltage ($T_J = 110^\circ\text{C}$)	MT2(+), G(+)	0.2	-	-	V
	MT2(+), G(-)	0.2	-	-	
	MT2(-), G(-)	0.2	-	-	

2. Indicates Pulse Test: Pulse Width $\leq 2.0 \text{ ms}$, Duty Cycle $\leq 2\%$.

Thyristors


Surface Mount – 600V–800V > BTA16-600SW3G, BTA16-800SW3G,

Dynamic Characteristics


Characteristic	Symbol	Min	Typ	Max	Unit
Rate of Change of Commutating Current, See Figure 10. (Gate Open, $T_J = 110^\circ\text{C}$, No Snubber)	$(\text{dI}/\text{dt})_C$	2.0	—	—	A/ms
Critical Rate of Rise of On-State Current ($T_J = 110^\circ\text{C}$, $f = 120$ Hz, $I_G = 20$ mA, $\text{tr} \leq 100$ ns)	dI/dt	—	—	50	A/ μs
Critical Rate of Rise of Off-State Voltage ($V_D = 0.66 \times V_{DRM}$, Exponential Waveform, Gate Open, $T_J = 110^\circ\text{C}$)	dV/dt	250	—	—	V/ μs

Voltage Current Characteristic of SCR

Symbol	Parameter
V_{DRM}	Peak Repetitive Forward Off State Voltage
I_{DRM}	Peak Forward Blocking Current
V_{RRM}	Peak Repetitive Reverse Off State Voltage
I_{RRM}	Peak Reverse Blocking Current
V_{TM}	Maximum On State Voltage
I_H	Holding Current

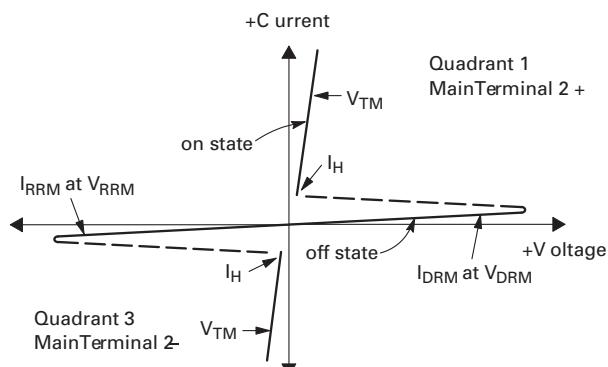

Quadrant Definitions for a Triac

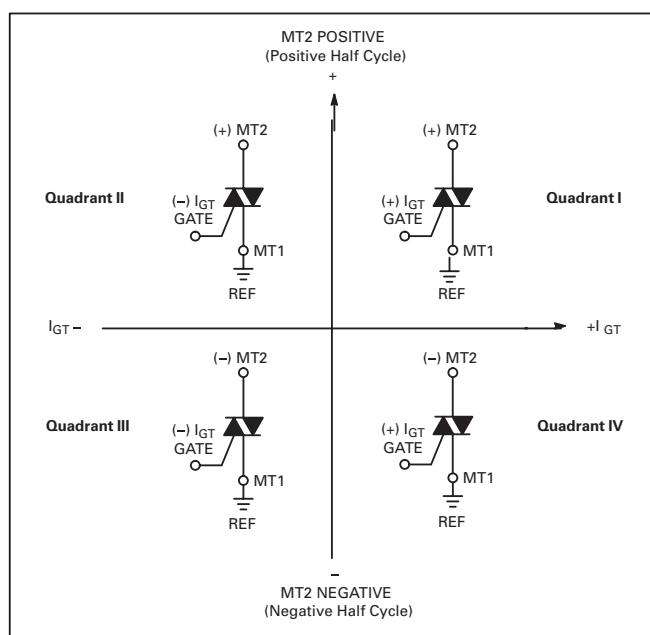

All polarities are referenced to MT1.
With in-phase signals (using standard AC lines) quadrants I and III are used.

Thyristors

Surface Mount – 600V-800V > BTA16-600SW3G, BTA16-800SW3G,

Figure 1. Typical RMS Current Derating

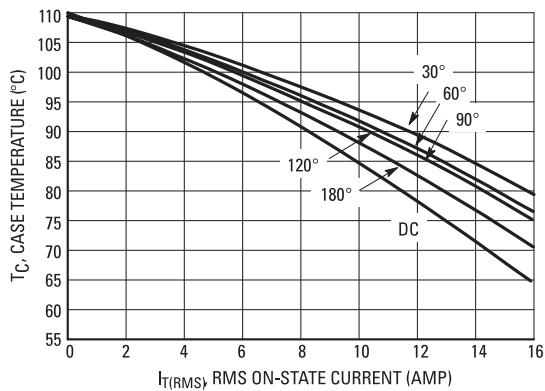


Figure 2. On-State Power Dissipation

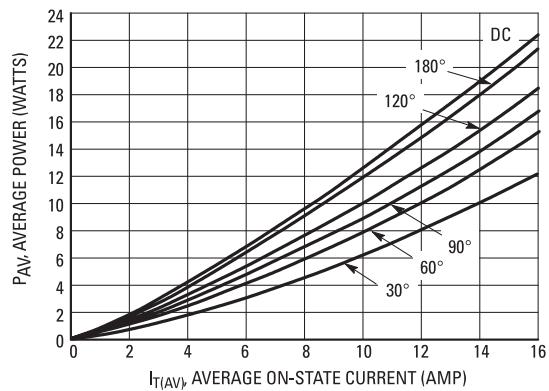


Figure 3. On-State Characteristics

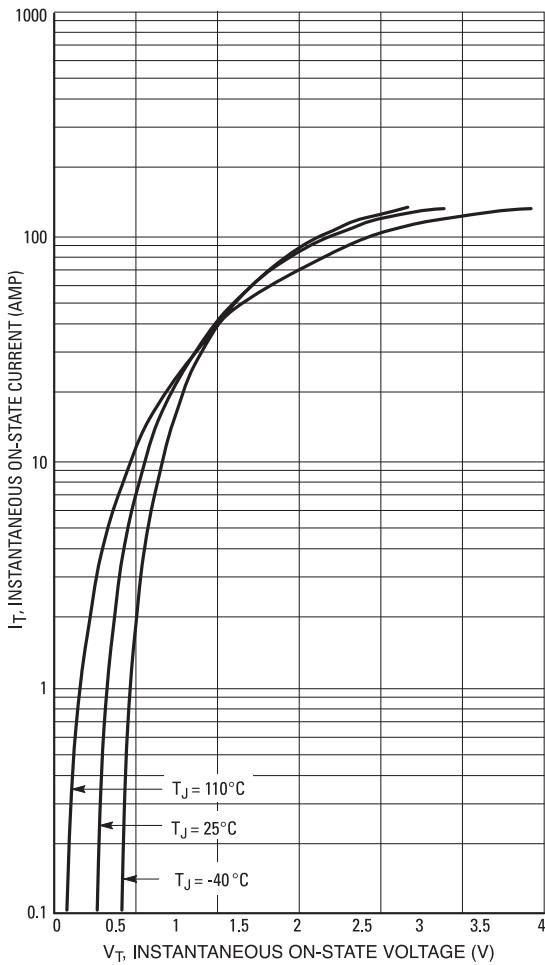


Figure 4. Thermal Response


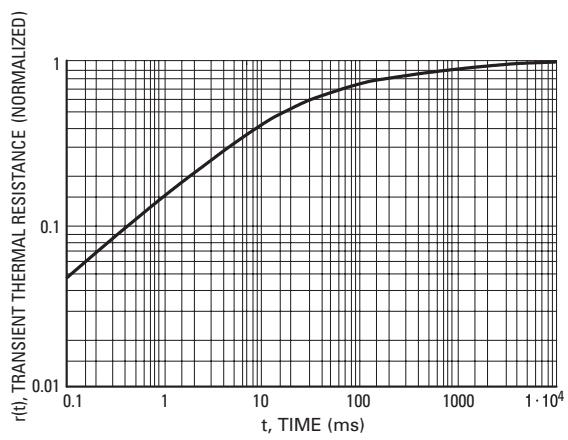


Figure 5. Hold Current Variation

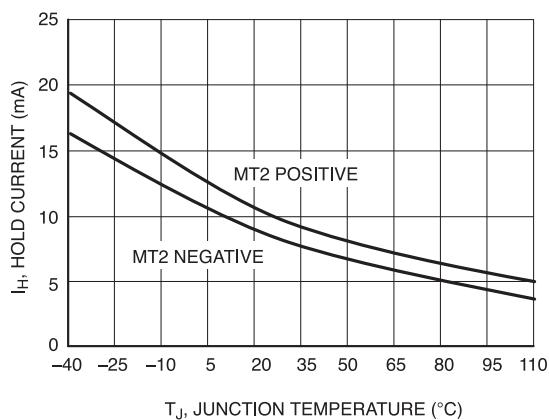

Thyristors

Surface Mount – 600V-800V > BTA16-600SW3G, BTA16-800SW3G,

Figure 6. Gate Trigger Current Variation

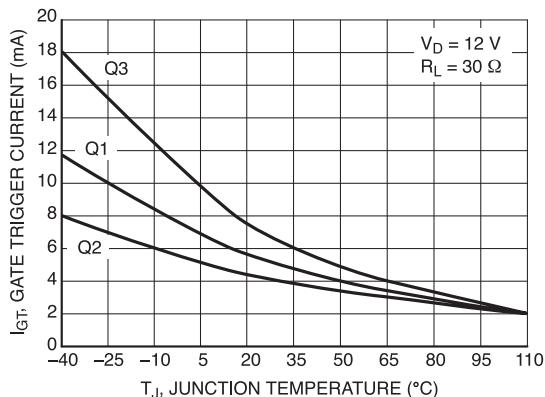


Figure 7. Gate Trigger Voltage Variation

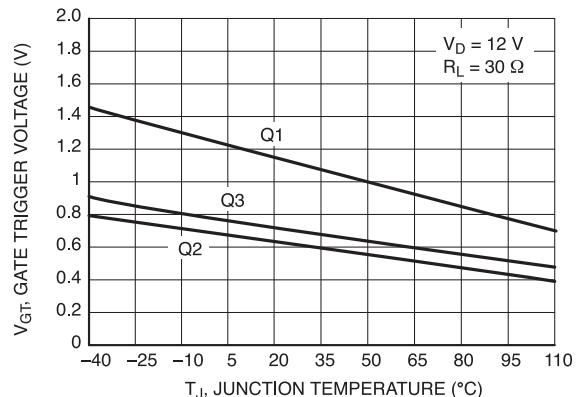


Figure 8. Typical Latching Current Variation


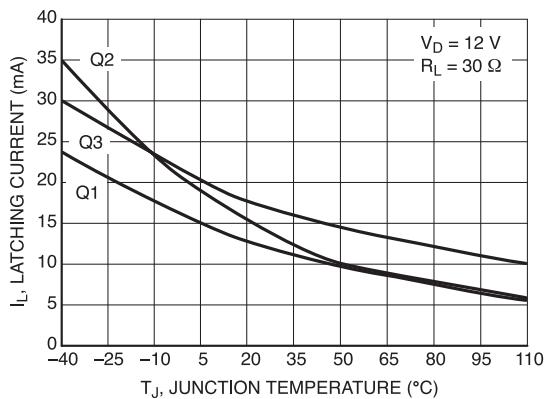




Figure 9. Simplified Test Circuit to Measure the Critical Rate of Rise of Commutating Current (di/dt)

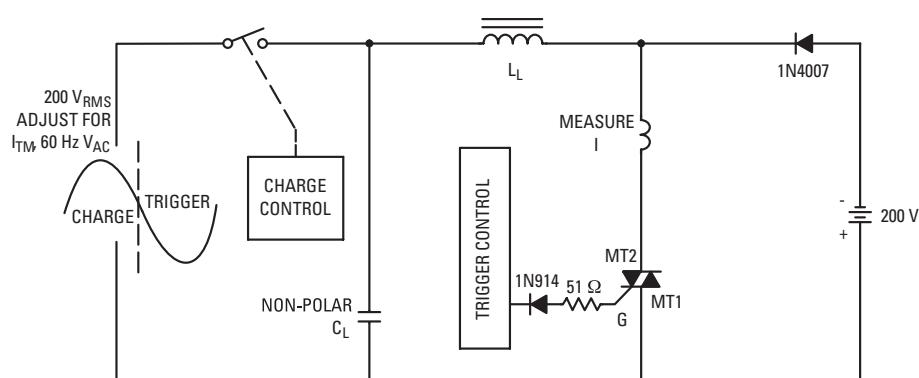



Note: Component values are for verification of rated $(di/dt)_c$. See AN1048 for additional information.

Note: Component values are for verification of rated $(di/dt)_c$. See AN1048 for additional information

Dimensions

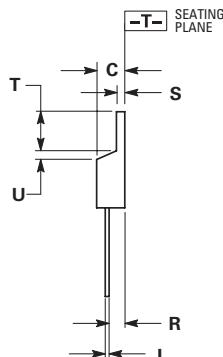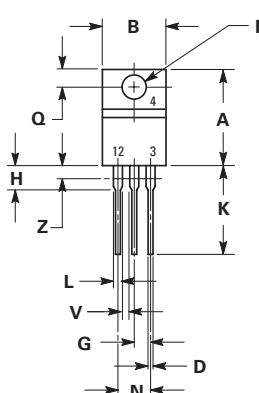

Part Marking System



x= 6 or 8
 A= Assembly Location (Optional)*
 Y= Year
 WW = Work Week
 G= Pb-Free Package

* The Assembly Location code (A) is optional. In cases where the Assembly Location is stamped on the package the assembly code may be blank.

Dim	Inches		Millimeters	
	Min	Max	Min	Max
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
J	0.014	0.022	0.36	0.55
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

2. CONTROLLING DIMENSION: INCH.

3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

Pin Assignment

1	Main Terminal 1
2	Main Terminal 2
3	Gate
4	No Connection

Ordering Information

Device	Package	Shipping
BTA16-600SW3G	TO-220AB (Pb-Free)	50 Units / Rail
BTA16-800SW3G	TO-220AB (Pb-Free)	50 Units / Rail

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.