





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY ALL RIGHTS RESERVED.

| LOC | | DIST | | REVISIONS | | | |
|-----|-----|---------------------------|---------|-----------|------|--|--|
| P | LTR | DESCRIPTION | DATE | DWN | APVD | | |
| P | | REVISED PER ECO-11-005139 | 19MAR11 | RK | HMR | | |

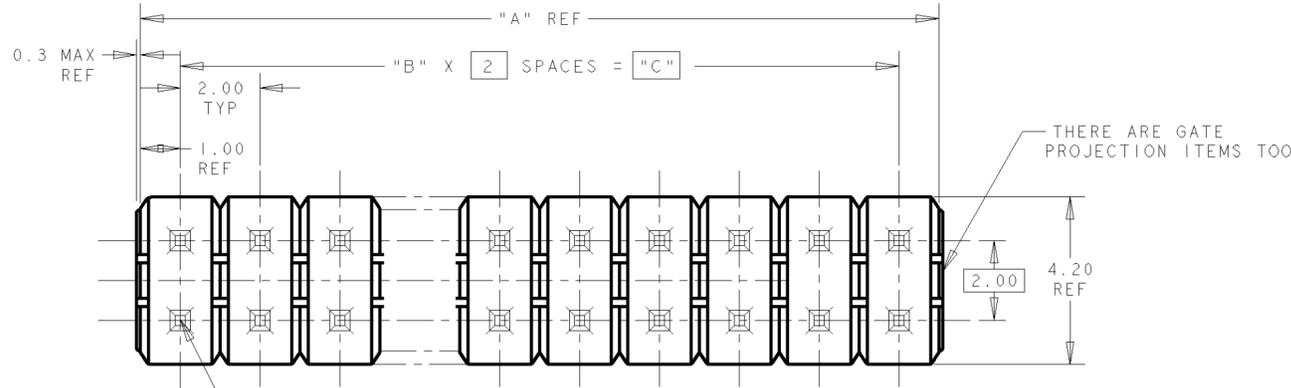

NOTES:
 1 MATERIAL HOUSING: THERMOPLASTIC, UL94V-0, POST: BRASS
 2 FINISH CONTACT AREA, 'D' MIN Au ON NICKEL 0.0013 MIN ALL OVER POST TINE: 0.001 MIN MATTE TIN

0.6 TOTAL TYP POST TIP

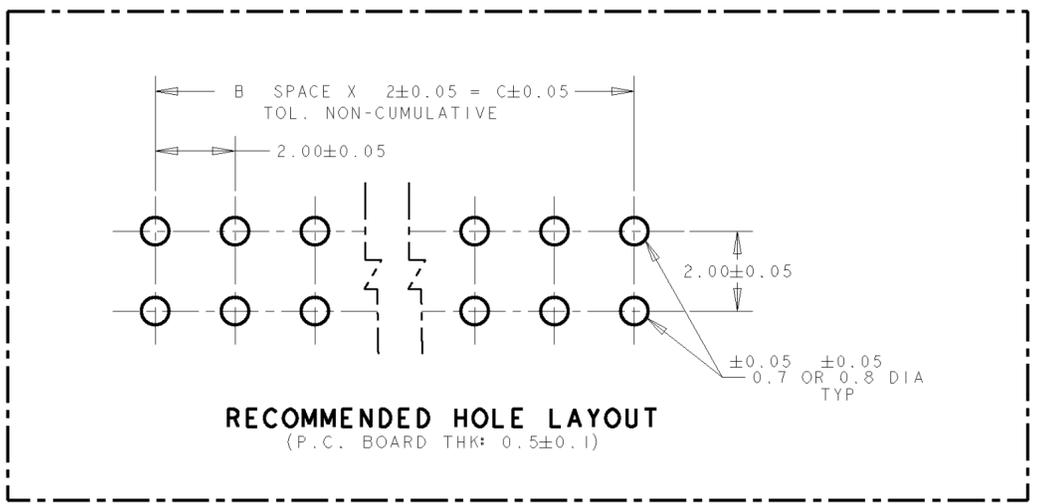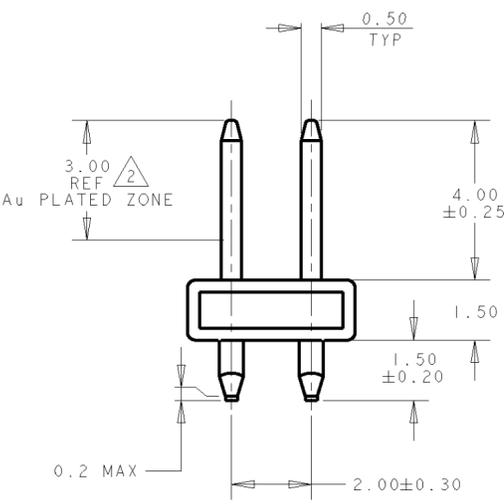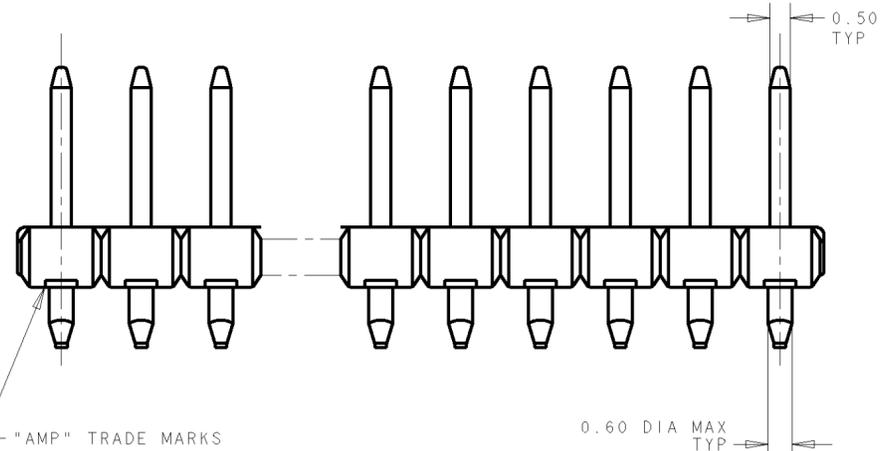

| 0.00076 | 48 | 24 | 2 | 2 | 5- | -0 |
|---------|-----|------------|---------|-----------|-----------|----|
| 0.0002 | 46 | 23 | 2 | 2 | 4- | -9 |
| | 44 | 22 | 50 | 50 | 4- | -8 |
| | 42 | 21 | 48 | 48 | 4- | -7 |
| | 40 | 20 | 46 | 46 | 4- | -6 |
| | 38 | 19 | 44 | 44 | 4- | -5 |
| | 36 | 18 | 42 | 42 | 4- | -4 |
| | 34 | 17 | 40 | 40 | 4- | -3 |
| | 32 | 16 | 38 | 38 | 4- | -2 |
| | 30 | 15 | 36 | 36 | 4- | -1 |
| | 28 | 14 | 34 | 34 | 4- | -0 |
| | 26 | 13 | 32 | 32 | 3- | -9 |
| | 24 | 12 | 30 | 30 | 3- | -8 |
| | 22 | 11 | 28 | 28 | 3- | -7 |
| | 20 | 10 | 26 | 26 | 3- | -6 |
| | 18 | 9 | 24 | 24 | 3- | -5 |
| | 16 | 8 | 22 | 22 | 3- | -4 |
| | 14 | 7 | 20 | 20 | 3- | -3 |
| | 12 | 6 | 18 | 18 | 3- | -2 |
| | 10 | 5 | 16 | 16 | 3- | -1 |
| | 8 | 4 | 14 | 14 | 3- | -0 |
| | 6 | 3 | 12 | 12 | 2- | -9 |
| | 4 | 2 | 10 | 10 | 2- | -8 |
| | 2 | 1 | 8 | 8 | 2- | -7 |
| | 2 | 1 | 6 | 6 | 2- | -6 |
| 0.00076 | 48 | 24 | 4 | 4 | 2- | -5 |
| | 46 | 23 | 4 | 4 | 2- | -4 |
| | 44 | 22 | 48 | 48 | 2- | -3 |
| | 42 | 21 | 46 | 46 | 2- | -2 |
| | 40 | 20 | 44 | 44 | 2- | -1 |
| | 38 | 19 | 42 | 42 | 2- | -0 |
| | 36 | 18 | 40 | 40 | 1- | -9 |
| | 34 | 17 | 38 | 38 | 1- | -8 |
| | 32 | 16 | 36 | 36 | 1- | -7 |
| | 30 | 15 | 34 | 34 | 1- | -6 |
| | 28 | 14 | 32 | 32 | 1- | -5 |
| | 26 | 13 | 30 | 30 | 1- | -4 |
| | 24 | 12 | 26 | 26 | 1- | -2 |
| | 22 | 11 | 24 | 24 | 1- | -1 |
| | 20 | 10 | 22 | 22 | 1- | -0 |
| | 18 | 9 | 20 | 20 | | -9 |
| | 16 | 8 | 18 | 18 | | -8 |
| | 12 | 6 | 14 | 14 | | -6 |
| | 8 | 4 | 10 | 10 | | -4 |
| 0.0002 | 2 | 1 | 4 | 4 | 5178751-1 | |
| "D" | "C" | "B" SPACES | "A" REF | NO OF POS | ASS'Y P/N | |

| | | | | | | | |
|-------------------|--|--|--|--------------------|--|---|--|
| DIMENSIONS: mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | DWN WYLEE 5APR05 | | TE Connectivity | |
| 0 PLC ± | | 1 PLC ± | | CHK VINCENT TAN | | NAME AMPMODU 2mm PITCH POST HEADER, V-TYPE, L=1.5 | |
| 2 PLC ± | | 3 PLC ± | | APVD SE LEONG | | SIZE A2 | |
| 4 PLC ± | | ANGLES ± | | PRODUCT SPEC - | | CAGE CODE 00779 | |
| FINISH | | FINISH | | APPLICATION SPEC - | | DRAWING NO 5178751 | |
| GENERAL TOLERANCE | | MATERIAL | | WEIGHT - | | SCALE 8:1 | |
| 0<+ 10 : ±0.2 | | 1 | | CUSTOMER DRAWING | | SHEET OF REV P | |
| 10<+ 30 : ±0.25 | | 2 | | | | | |
| 30<+ 100 : ±0.3 | | | | | | | |
| ANGLES : ±3° | | | | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-5178751-4](#)