NUMBER 917338

3rd ANGLE PROJECTION

METRIC

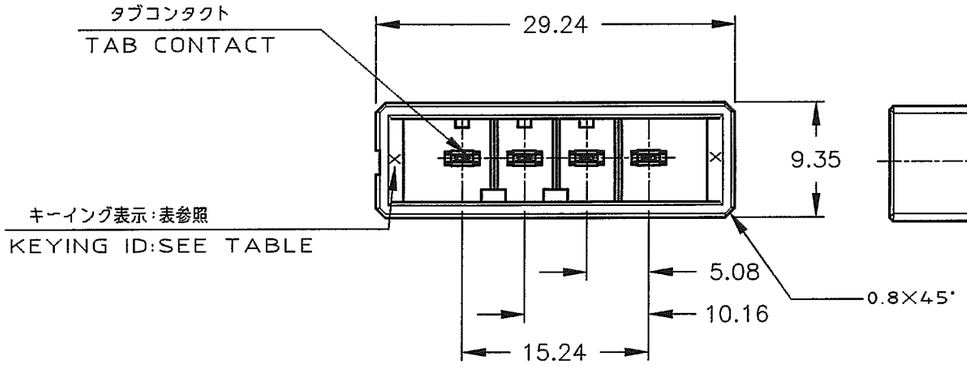

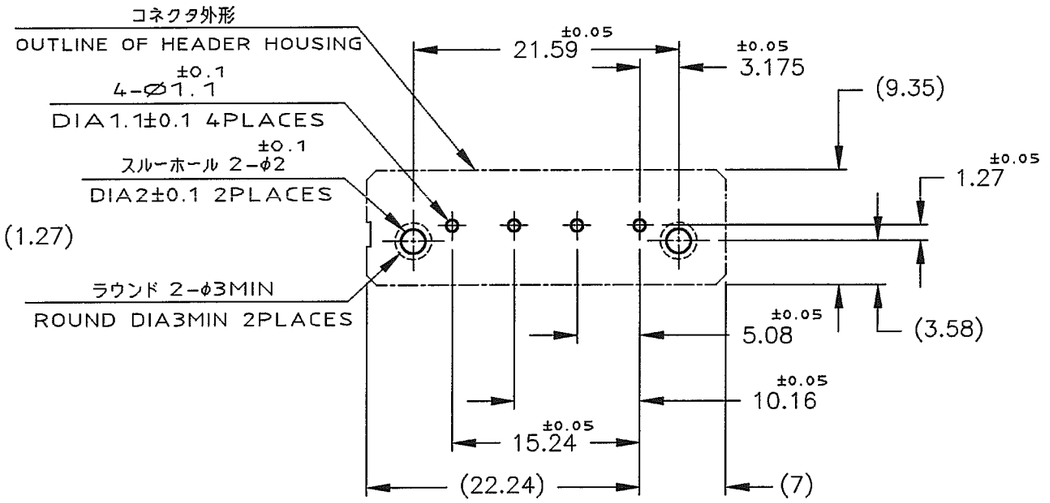

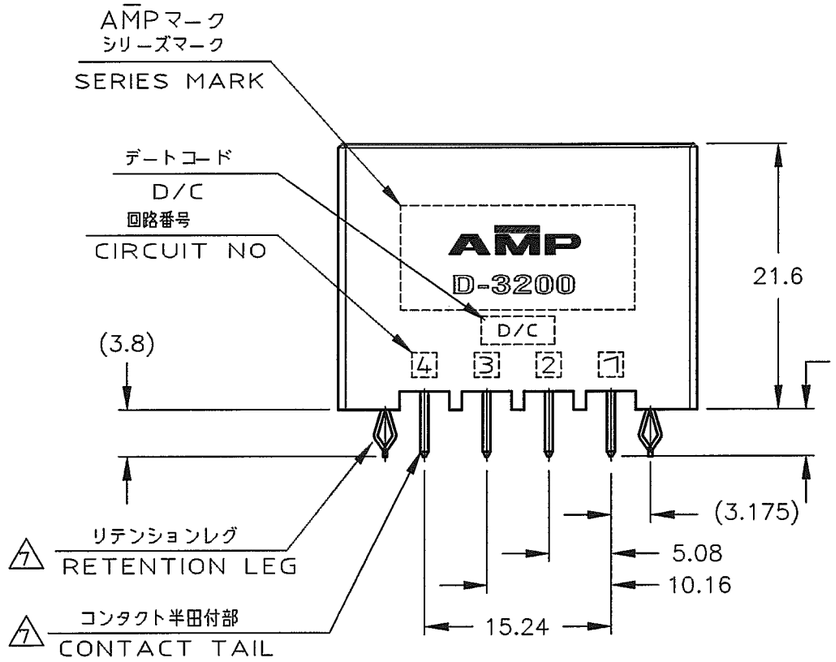

推奨基板取付け穴寸法

PC 基板厚:1.6±0.1
(非累積公差)
(コネクタ搭載面)

RECOMEND PC BOARD HOLE PATTERN

PC BOARD THICKNESS:1.6±0.1
(NOT ACCUMULATE TOLERANCE)
(CONNECTOR MOUNT SIDE)

NOTES

1. MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC,POLYESTER(94V-0),COLOR:BLACK
CONTACT:COPPER ALLOY
RETENTION LEG:COPPER ALLOY
2. FINISH(CONTACT AREA):0.38μmMIN GOLD PLATING OVER Ni PLATING
3. FINISH(CONTACT AREA):0.76μmMIN GOLD PLATING OVER Ni PLATING
4. FINISH(CONTACT AREA):2.0 μmMIN TIN PLATED OVER NICKEL
~~5. FINISH(RETENTION LEG): TIN-LEAD PLATED (CONTACT TAIL) OVER NICKEL~~
6. PRODUCT SPEC:108-5349
7. FINISH(RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

注記

1. 材料: ハウジング: ガラス入り熱可塑性ポリエステル樹脂 (94V-0),色: 黒
コンタクト: 銅合金
リテンションレグ: 銅合金
2. めっき: コンタクト: 全面Ni下地 接触部:0.38μm MIN金めっき
3. めっき: コンタクト: 全面Ni下地 接触部:0.76μm MIN金めっき
4. めっき: コンタクト: 全面Ni下地 接触部:2.0 μm MINスズめっき
~~5. めっき: リテンションレグとコンタクト半田付部 : ニッケル下地の上に半田めっき~~
6. 製品規格:108-5349
7. めっき: リテンションレグとコンタクト半田付部 : ニッケル下地の上にスズめっき

KEYING LOCATION キーイング 位置	KEYING キーイング	FINISH	PART NO. 製品番号
	Y	7 4	2-917338-5
		7 3	2-917338-3
		7 2	2-917338-2
	X	7 4	1-917338-5
		7 3	1-917338-3
		7 2	1-917338-2

TE Connectivity

LTR	REVISION RECORD	DR	CHK	DATE
D1	REVISED PER ECO-11-005030	RK	HMR	25MAR 11

WIRE RANGE mm² (AWG -)	INSULATION DIA - mmØ	NAME ダイナミック D-3200S 5.08 ピッチ (V) 4 極 ヘッダーアセンブリー DYNAMIC D-3200S 5.08PITCH(V) 4 POS.HDR CONN.ASS'Y	
MATERIAL SEE NOTES 注記参照	FINISH SEE NOTES 注記参照	一般公差 (GENERAL TOLERANCE) 10以下 ±0.3, 10を超え 30以下 ±0.4, 30を超え100以下 ±0.45, 角度 ±3°	SIZE A3 / LOC J / NUMBER C-917338
DR. 18/OCT/'94 K.IKEDA	DE. 18/OCT/'94 K.IKEDA		SCALE 2-1 / REV. D1 / SHEET 1 OF 1
CHK. 19/OCT/'94 S.MANABE	APP. 19/OCT/'94 S.MANABE		

PRINT DIST

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT