


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS - in.					TOOLS
		A ± .03	W ± .01	C ± .02	M ± .03	H ± .01	
PNF14-6LF	#6	.87 (22.10)	.25 (6.35)	.20 (5.08)	.65 (16.51)	.14 (3.56)	CT-100A +CT-400 +CT-460 *CT-600-A (CT-550CH) *CT-1550 *CT-1551 *CT-2500 (CT-2550CH)
PNF14-6LFW	#6	.84 (21.34)	.29 (7.37)	.20 (5.08)	.65 (16.51)	.14 (3.56)	
PNF14-8LF	#8	.93 (23.62)	.29 (7.37)	.25 (6.35)	.70 (17.78)	.16 (4.06)	
PNF14-10LF	#10	.93 (23.62)	.33 (8.38)	.25 (6.35)	.70 (17.78)	.19 (4.83)	

*USED FOR #18-14 AWG SOLID OR STRANDED COPPER WIRE
+UL LISTED ONLY WITH #18-14 AWG SOLID OR STRANDED COPPER WIRE

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - 600V MAX. BLDG WIRE
 - 1000V MAX. IN SIGNS, FIXTURES & LUMINARIES
 - 221°F (105°C) MAX TEMP. RATING
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- MATERIAL:
 - STAMPING - .032" THK COPPER, TIN PLATED
 - HOUSING - NYLON, BLUE
 - SLEEVE - BRASS, TIN PLATED
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- WIRE STRIP LENGTH: $7/32 + 1/32$ (5.6 + .8)
- 0 - 0

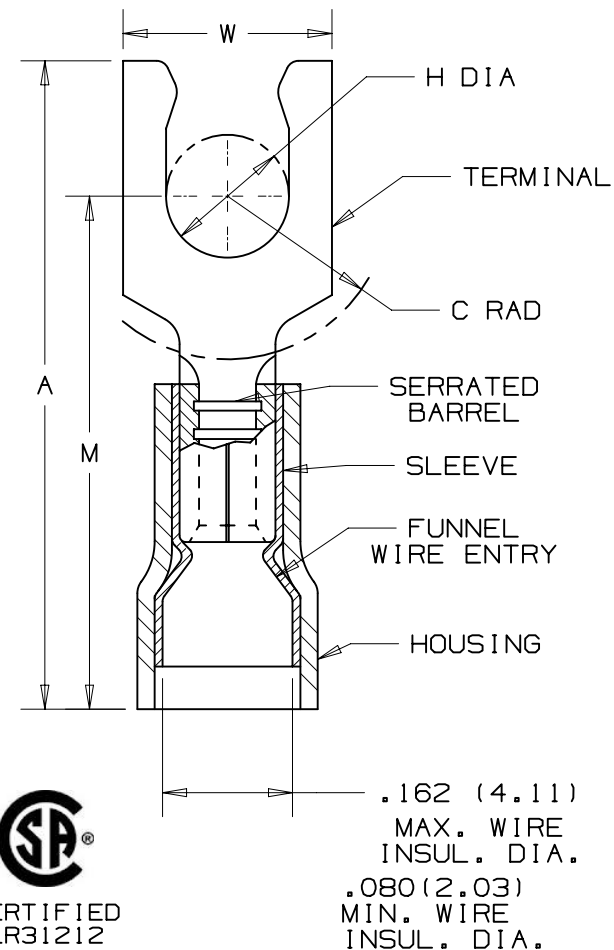

.162 (4.11)
MAX. WIRE
INSUL. DIA.
.080 (2.03)
MIN. WIRE
INSUL. DIA.

							TITLE					
							#16-14 BARREL NYLON INSULATED LOCKING FORK, FUNNELED WIRE ENTRY, .162 [4.11] MAX. WIRE INSULATION DIAMETER					
							CUSTOMER DRAWING					
							ITEM REVISION NAME		PANDUIT			
							N41294BB/09					
							DATASET FILE NAME					
							N41294BB/09					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:			
							.X ± .XX ±		SEE NOTES			
							.XXX ± ANGLES ±					
							THIRD ANGLE PROJECTION		DRAWING NUMBER:			
									A41294			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
							DW		RLS	NONE		A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PNF14-6LF-C](#) [PNF14-10LF-M](#) [PNF14-8LF-C](#) [PNF14-8LF-M](#) [PNF14-6LF-M](#) [PNF14-10LF-C](#) [PNF14-6LFW-C](#)