

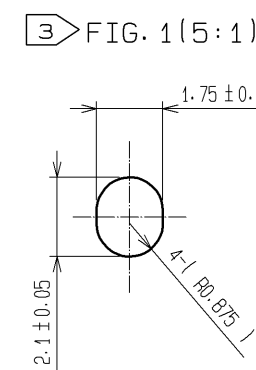
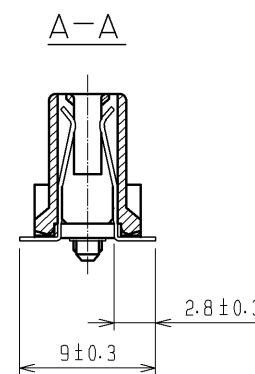

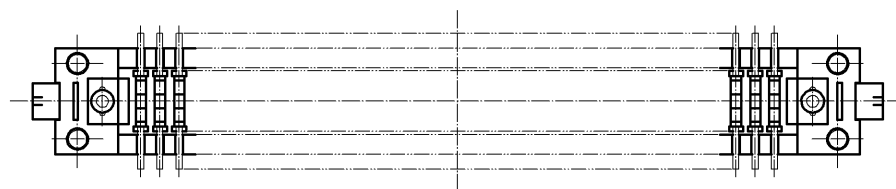
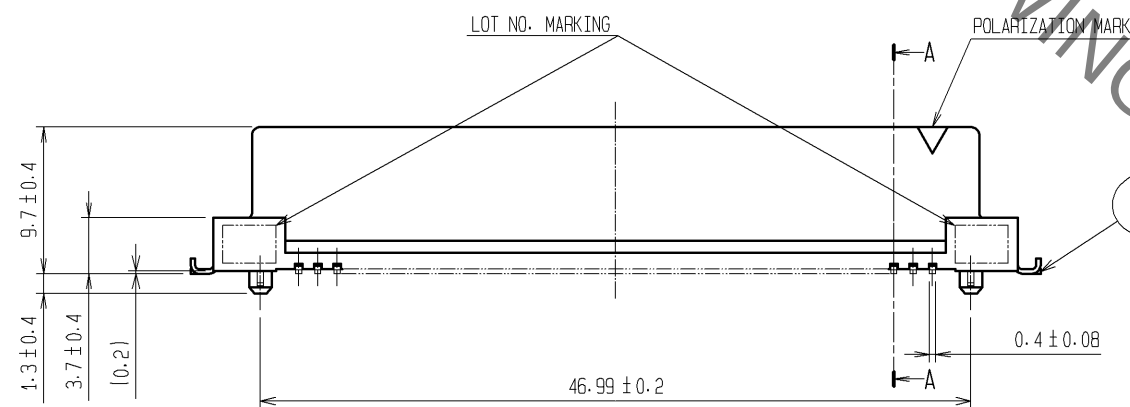



Dec.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

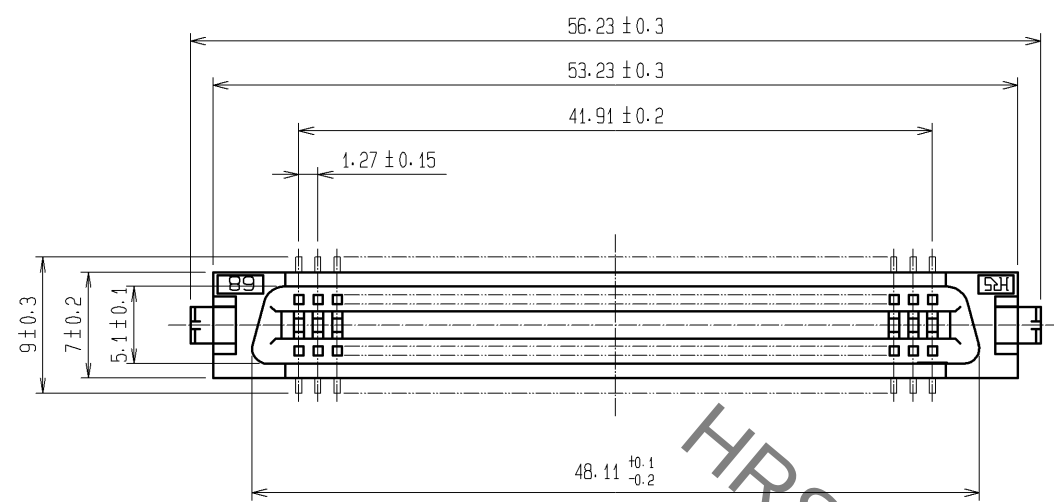

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

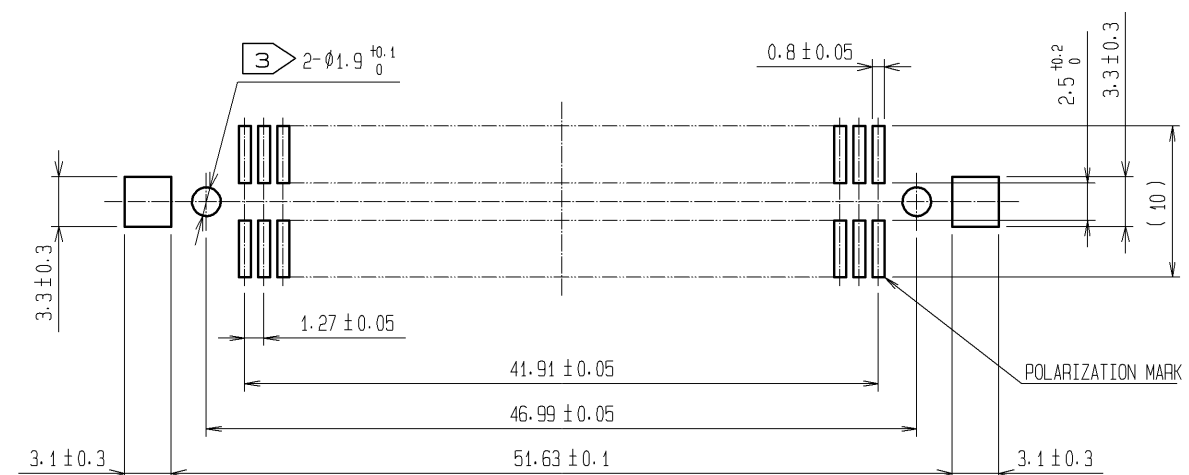

- NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

			3	BRASS	TIN-PLATING					
1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.					
					LEAD AREA:TIN-PLATING 2μm min.					
					UNDER PLATING:NICKEL 1.5μm min.					
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS					
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	07. 10. 19	DRAWING NO.	EDC3-082421-21					
		CHECED : HS. OZAWA	07. 10. 19	PART NO.	FX2-68S-1. 27SVL (71)					
		DESIGNED : SY. KAMIGA	07. 10. 19	CODE NO.	CL572-2156-5-71					
		DRAWN : HK. SUNADORI	07. 10. 19							
										