


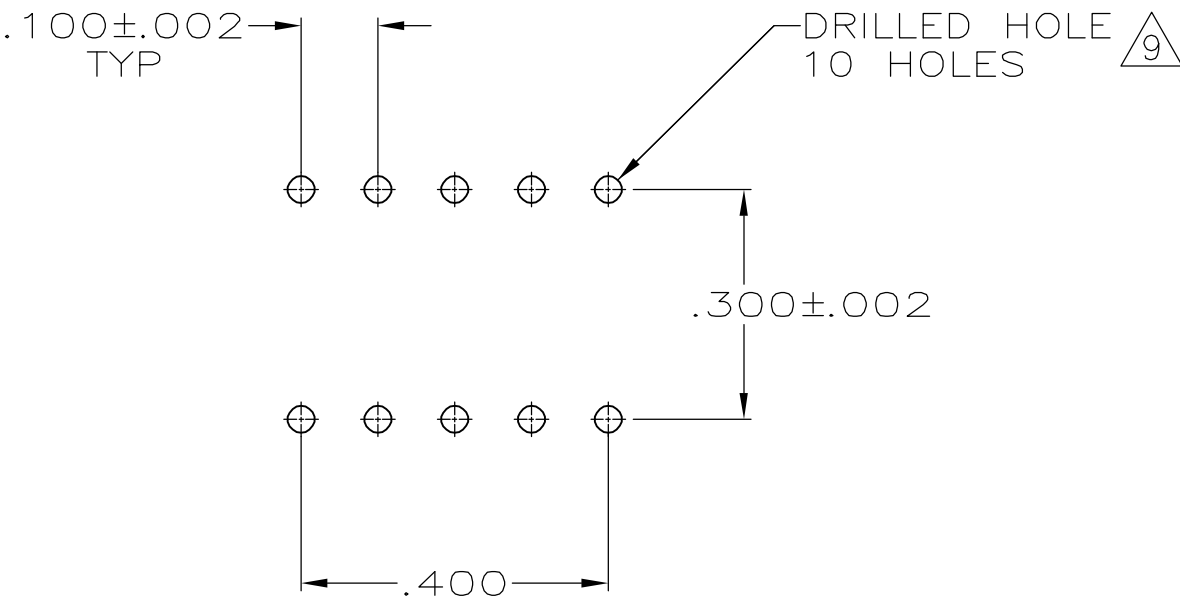


LOC	DIST	REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN
			A	REV PER EC 0S12-0573-04	05-04-05	JA
						APVD
						SF

.050±.005 DIA

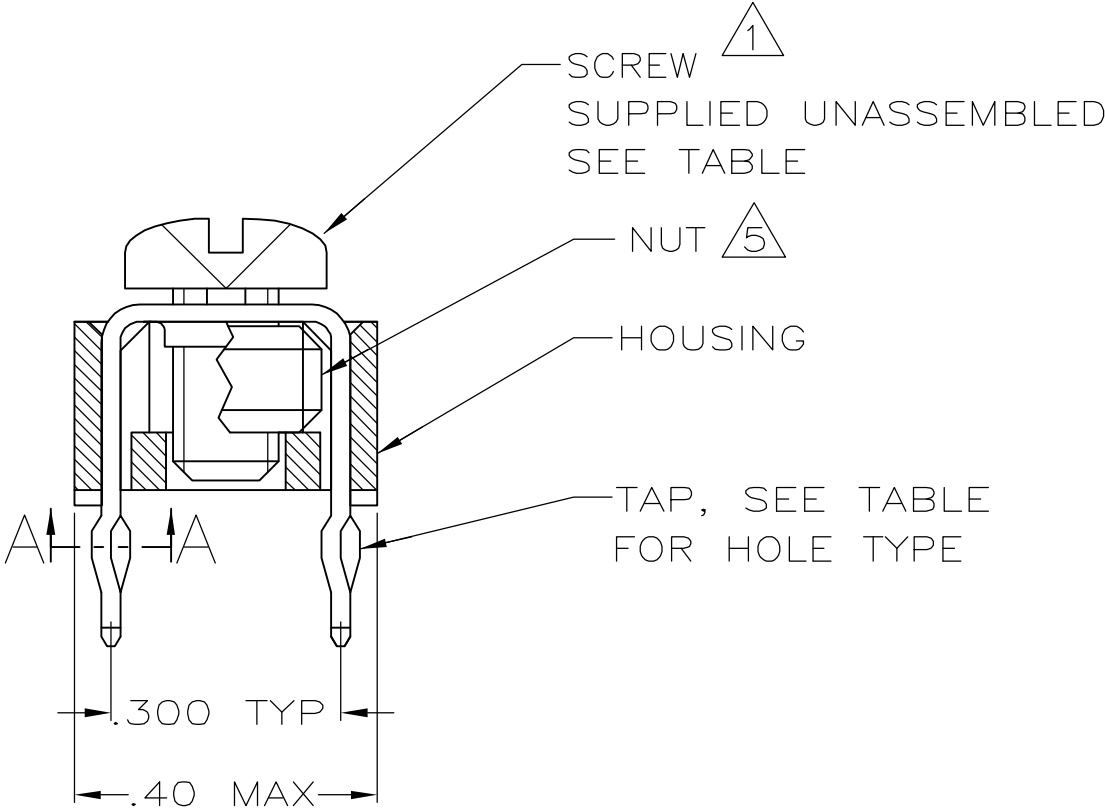


SECTION A—A
SCALE 10:1
10 PLACES

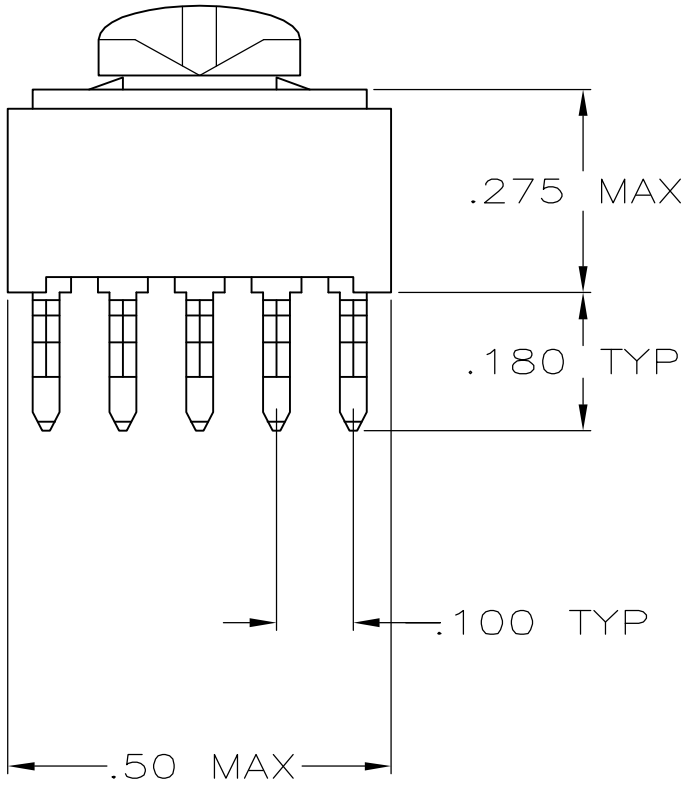

PC BOARD PATTERN

- (1) TO PREVENT THREAD STRIPPING, SCREW TORQUE SHOULD NOT EXCEED 9 IN LBS.
- (2) TAP HOLE IS 6-32UNC-2B, TWO MIN THREADS.
- (3) TAP HOLE IS M4 X 0.7, TWO MIN THREADS.
- (4) PACKAGED BULK.
- (5) NUT INCREASES TORQUE VALUE TO 26 IN LBS.
- (6) HOUSING: NYLON UL 94V-0.
TAP: COPPER ALLOY 735, .025 THICK.
- (7) TAP: .000150 MATTE TIN OVER .000050 NICKEL.
- (8) CLEARANCE HOLE FOR A 6-32 SCREW.
- (9) REFERENCE APPLICATION SPECIFICATION 114-11000 FOR DRILL HOLE SIZES AND FINISHES

(4)	(7)	(8)	BLACK	(5) YES (W/NUT)	NO	1-5055556-3
(4)	(7)	(8)	BLACK	(5) YES (W/NUT)	993879-1	1-5055556-2
(4)	(7)	(3)	BLACK	YES	M4 X 0.7 X 6MM	5055556-9
(4)	(7)	(2)	BLACK	YES	993879-1	5055556-4
(4)	(7)	(2)	BLACK	YES	NO	5055556-3
PACKAGE	FINISH	HOLE TYPE	HOUSING COLOR	HOUSING AND TAP ASSEMBLED	SCREW	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. ALCORTA - 05-04-05 CHK A. FRANTUM 05-04-05 APVD S. FLICKINGER 05-04-05	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC ± -		PRODUCT SPEC		
		1 PLC ± -		108-11030		
		2 PLC ± -		APPLICATION SPEC		
		3 PLC ± .010		114-11000		
		4 PLC ± -		WEIGHT		
		ANGLES ± -		A2 00779 C=5055556		
MATERIAL		FINISH		CUSTOMER DRAWING		
(6)				SCALE 4:1 SHEET 1 OF 1 REV A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5055556-3](#)