

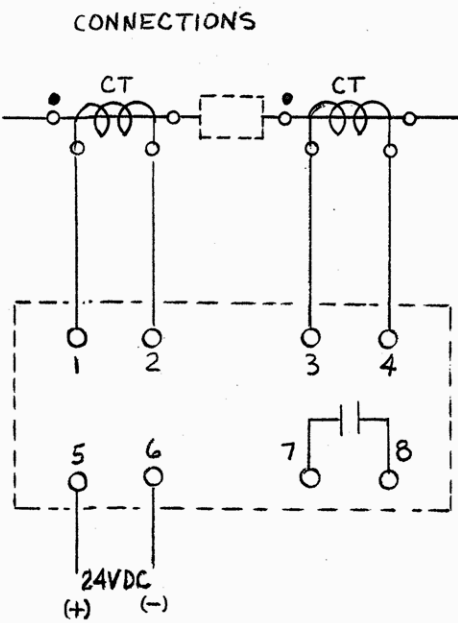
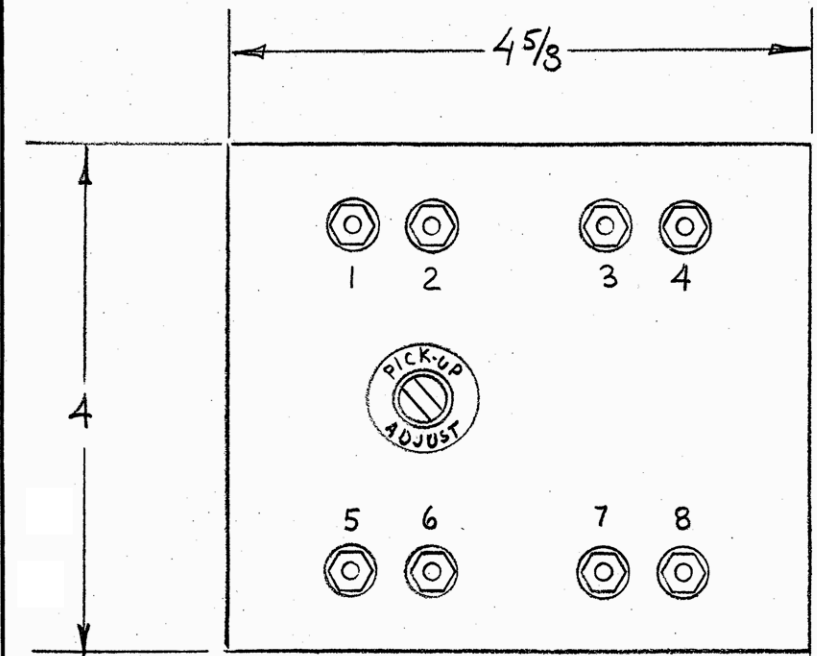


REVISIONS			
ZONE	LTR	DESCRIPTION	DATE
			APPROVED

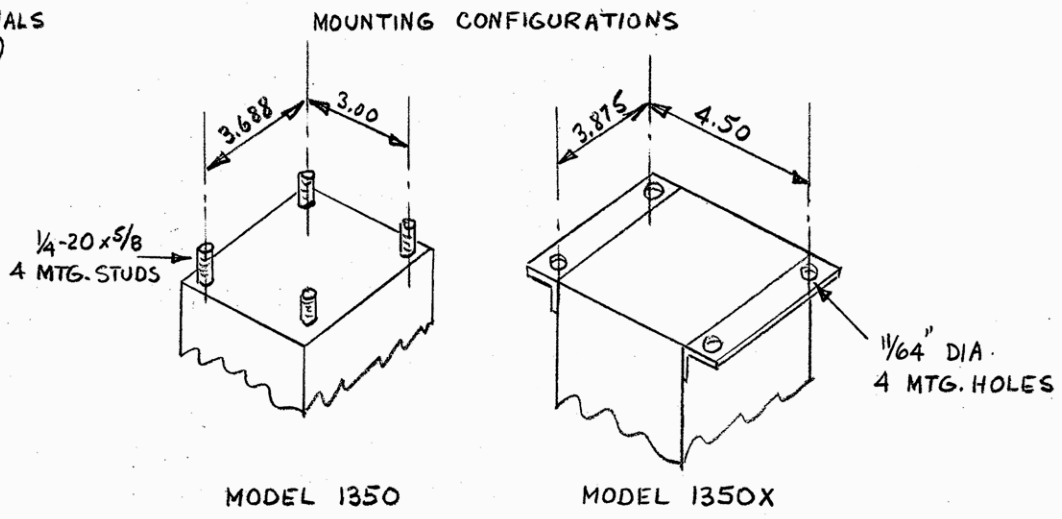

SPECIFICATIONS

INPUT CURRENT: 0-5 AMP. AC , 50-500Hz.
 CONTROL VOLTAGE : 24 VDC
 OPERATION: THE OUTPUT CONTACTS WILL REMAIN OPEN WHEN THE TWO CURRENTS ARE EQUAL. THE OUTPUT CONTACTS WILL CLOSE WHEN THE TWO CURRENTS ARE NOT EQUAL.
 CURRENT DIFFERENTIAL PICK-UP: THE DIFFERENTIAL TRIP POINT IS SCREWDRIVER ADJUSTABLE TO ANY VALUE BETWEEN 0.1AMP AND 0.5 AMP.
 OUTPUT CONTACTS : SPNO
 CONTACT RATING : 5 AMP. RESISTIVE AT 120VAC OR 28VDC
 CONSTRUCTION: SOLID STATE SENSOR WITH RELAY
 OUTPUT ENCLOSED IN A SEALED STEEL CAN.

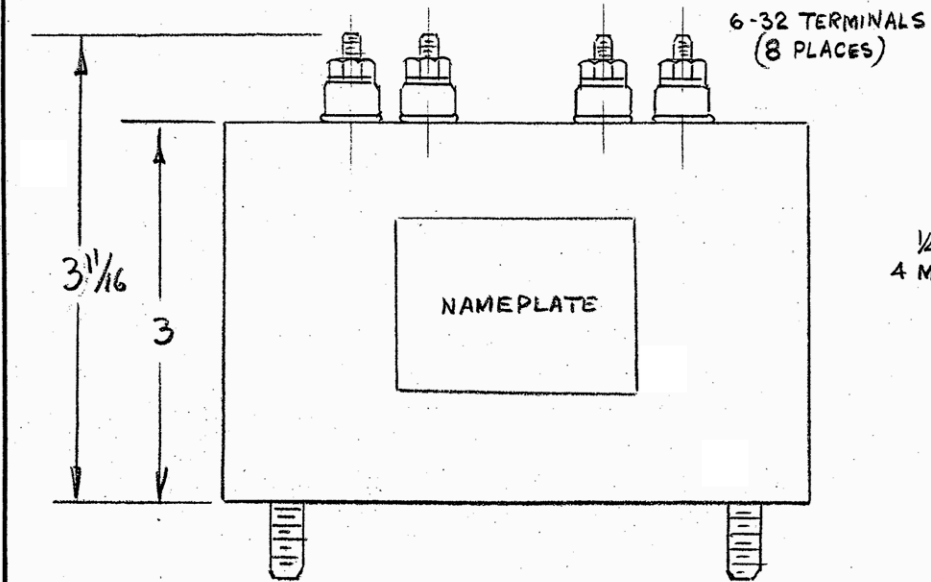

QTY REQD	SYM	DESCRIPTION	CODE IDENT NO.	PART NO.	SPEC	MATERIAL OR NOTE	ITEM NO.
LIST OF MATERIAL							
CONTRACT NO.			WILMAR ELECTRONICS, INC. TORRANCE, CALIFORNIA				
DRAWN			ERH 10-30-73				
CHECKED			TITLE				
DESIGN APPROVAL			CURRENT DIFFERENTIAL RELAY				
PROJECT APPROVAL			MODEL 1350				
DESIGN ACTIVITY APPROVAL			SIZE	CODE IDENT NO.	DWG NO.		
APPROVAL			C	25248	21-229		
SCALE			WEIGHT		SHEET		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCES ON FRACTIONS DECIMALS ANGLES

± 1/32 ± .010 ± 1/2°

BREAK ALL SHARP EDGES .015 MAX. AND DEBURR

MATERIAL:

NEXT ASSY USED ON

APPLICATION

Customer Drawing

SD-1350(X)

- 1618062-5 Rev O

X 1618062-8 Rev E



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1350X](#)